OIL ANALYSIS REPORT

Sample Rating Trend

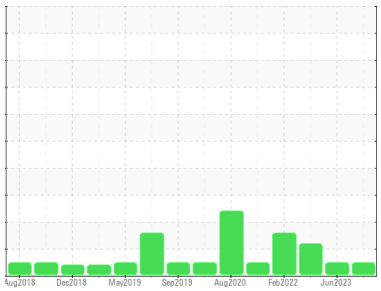

NORMAL

Machine Id
LIEBHERR 1300 CR-3317 (S/N 138-408)
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 46 (185 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
All component wear rates are normal.

Contamination
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0922178**	WC0810385	WC0720559
Sample Date		Client Info		**08 Apr 2024**	13 Jun 2023	07 Nov 2022
Machine Age	hrs	Client Info		**10234**	9021	8228
Oil Age	hrs	Client Info		**1213**	0	0
Oil Changed		Client Info		**Not Changd**	Not Changd	Not Changd
Sample Status				**NORMAL**	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**3**	<1	<1
Chromium	ppm	ASTM D5185m	>10	**<1**	<1	0
Nickel	ppm	ASTM D5185m	>10	**<1**	0	0
Titanium	ppm	ASTM D5185m		**<1**	0	0
Silver	ppm	ASTM D5185m		**<1**	0	0
Aluminum	ppm	ASTM D5185m	>10	**1**	0	0
Lead	ppm	ASTM D5185m	>10	**2**	0	0
Copper	ppm	ASTM D5185m	>75	**6**	4	4
Tin	ppm	ASTM D5185m	>10	**1**	0	0
Antimony	ppm	ASTM D5185m		**---**	---	---
Vanadium	ppm	ASTM D5185m		**<1**	0	0
Cadmium	ppm	ASTM D5185m		**<1**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	**<1**	<1	<1
Barium	ppm	ASTM D5185m	5	**0**	5	0
Molybdenum	ppm	ASTM D5185m	5	**3**	2	2
Manganese	ppm	ASTM D5185m		**<1**	<1	0
Magnesium	ppm	ASTM D5185m	25	**16**	23	13
Calcium	ppm	ASTM D5185m	200	**130**	89	73
Phosphorus	ppm	ASTM D5185m	300	**374**	401	362
Zinc	ppm	ASTM D5185m	370	**441**	526	420
Sulfur	ppm	ASTM D5185m	2500	**1498**	1809	1715

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	**1**	<1	0
Sodium	ppm	ASTM D5185m		**0**	<1	<1
Potassium	ppm	ASTM D5185m	>20	**1**	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	**1893**	2723	▲ 10646
Particles >6µm		ASTM D7647	>5000	**599**	839	▲ 2980
Particles >14µm		ASTM D7647	>640	**37**	65	118
Particles >21µm		ASTM D7647	>160	**10**	14	15
Particles >38µm		ASTM D7647	>40	**0**	1	0
Particles >71µm		ASTM D7647	>10	**0**	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	**18/16/12**	19/17/13	▲ 21/19/14

OIL ANALYSIS REPORT

Particle Trend

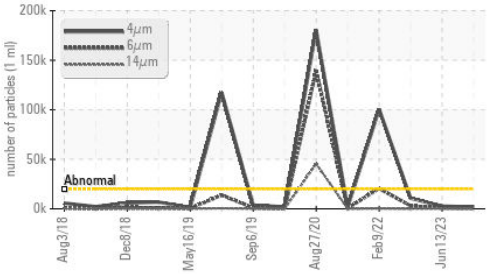

Acid Number

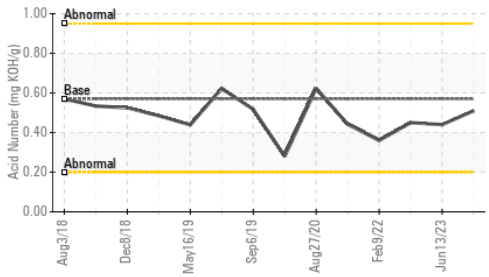

Viscosity @ 40°C

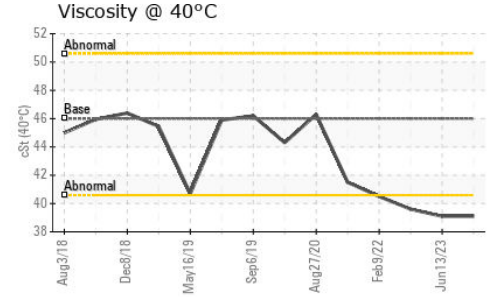

Particle Trend

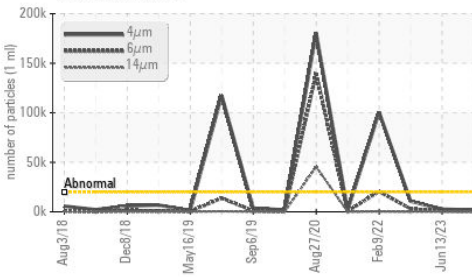

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	**0.51**	0.44	0.45

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	**39.1**	39.1	39.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

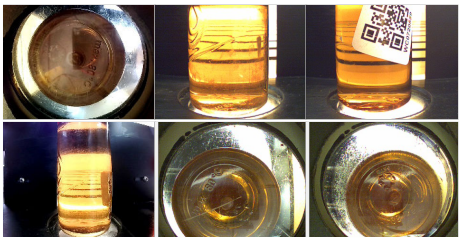

GRAPHS

Ferrous Alloys

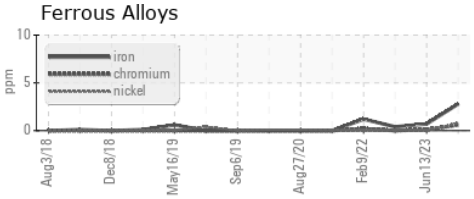

Non-ferrous Metals

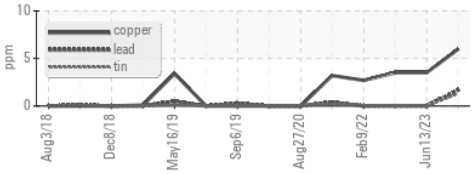

Viscosity @ 40°C

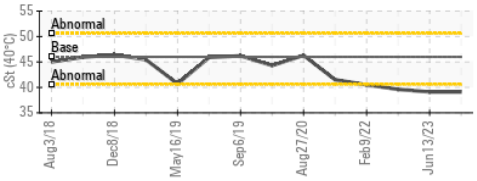

Particle Count

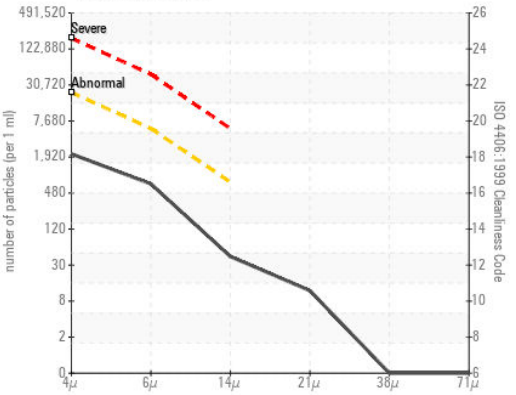

Acid Number

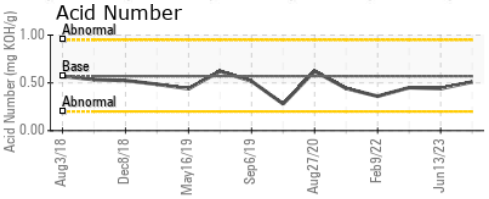

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0922178
Lab Number : 06146518
Unique Number : 10976596
Test Package : CONST

Received : 11 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 12 Apr 2024 - Wes Davis

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BUCKNER - WILLIS
18123 HWY 75 NORTH
WILLIS, TX
US 77378
Contact: JOHN HAWKINS
johnh@bucknercompanies.com
T:
F: