




# OIL ANALYSIS REPORT

Machine Id  
**CATERPILLAR 306CR 306CR (S/N CAT00306J6G609452)**  
 Component  
**Hydraulic System**  
 Fluid  
**GEAR OIL LS 80W90 (--- GAL)**

## Sample Rating Trend

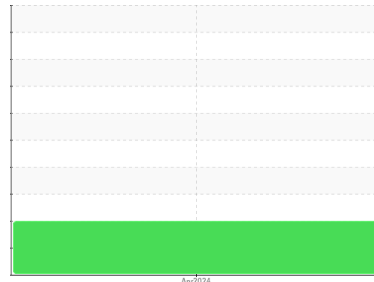

## VISCOSITY



### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0874525</b>	---	---
Sample Date	Client Info		<b>02 Apr 2024</b>	---	---
Machine Age	hrs	Client Info	<b>711</b>	---	---
Oil Age	hrs	Client Info	<b>711</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>10</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >10	<b>1</b>	---	---
Lead	ppm	ASTM D5185m >10	<b>2</b>	---	---
Copper	ppm	ASTM D5185m >75	<b>13</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>1</b>	---	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 150	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m 10	<b>2</b>	---	---
Calcium	ppm	ASTM D5185m 70	<b>207</b>	---	---
Phosphorus	ppm	ASTM D5185m 2000	<b>719</b>	---	---
Zinc	ppm	ASTM D5185m 50	<b>892</b>	---	---
Sulfur	ppm	ASTM D5185m 20000	<b>1965</b>	---	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>2</b>	---	---
Sodium	ppm	ASTM D5185m	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---

### FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>5399</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>1604</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>169</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>33</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>20/18/15</b>	---	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.96</b>	---	---



# OIL ANALYSIS REPORT

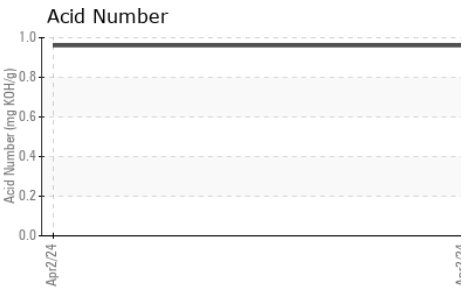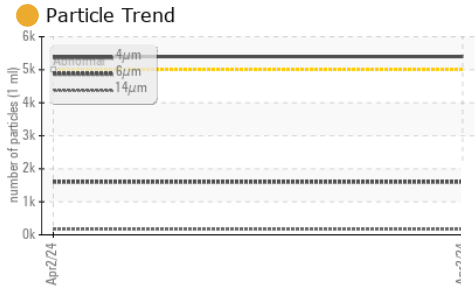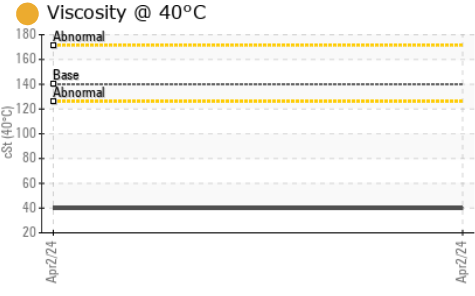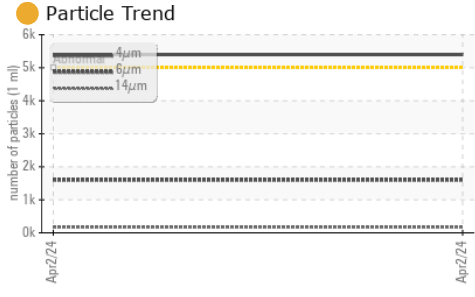





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	140	● 39.8	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

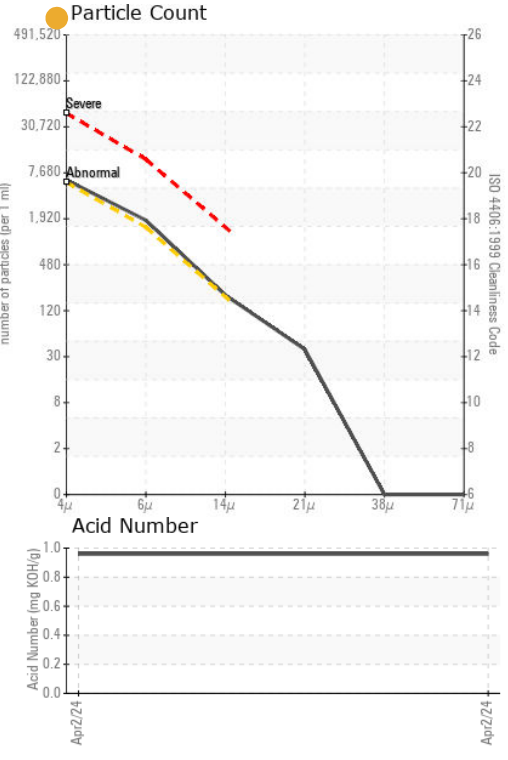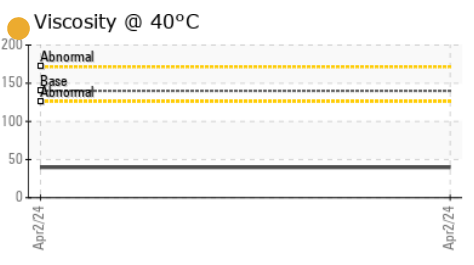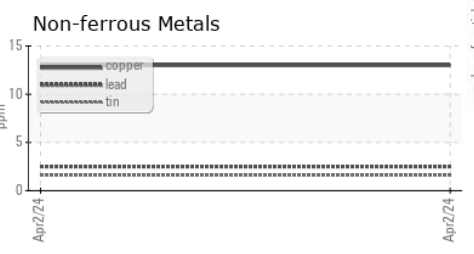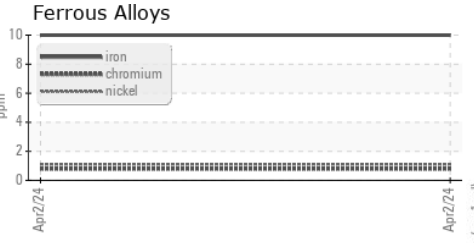

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0874525      **Received** : 11 Apr 2024  
**Lab Number** : 06146528      **Tested** : 12 Apr 2024  
**Unique Number** : 10976606      **Diagnosed** : 15 Apr 2024 - Don Baldrige  
**Test Package** : CONST

**AMERICAN SITE AND UTILITY**  
 10902 CANDILARA LN  
 MIDLAND, NC  
 US 28107  
 Contact: SANDY PRESTON  
 spreston.asu@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)