

# **OIL ANALYSIS REPORT**



#### Machine Id **1400-1** Component Hydraulic System Fluid PETRO CANADA HYDREX AW 46 (--- GAL)

#### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

## Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KFS0004974		
Sample Date		Client Info		10 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	8		
Chromium	ppm	ASTM D5185m	>20	1		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	1		
Lead	ppm	ASTM D5185m	>20	1		
Copper	ppm	ASTM D5185m	>20	4		
Tin	ppm	ASTM D5185m	>20	1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	0		
Volybdenum	ppm	ASTM D5185m	0	1		
Manganese	ppm	ASTM D5185m	0	<1		
Magnesium	ppm	ASTM D5185m	0	2		
Calcium	ppm	ASTM D5185m	50	65		
Phosphorus		ASTM D5185m	330	385		
Zinc	ppm	ASTM D5185m	430	472		
Sulfur	ppm	ASTM D5185m	430 760	2382		
	ppm					
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	781		
Particles >6µm		ASTM D7647	>1300	145		
Particles >14µm		ASTM D7647	>160	18		
Particles >21µm		ASTM D7647	>40	7		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/14/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	0.52		
· /	5 0			Contact/Locatio		

Report Id: MARPUL [WUSCAR] 06146566 (Generated: 04/12/2024 16:49:46) Rev: 1

Contact/Location: Service Manager - MARPUL Page 1 of 2



# **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

scalar \*Visual

scalar \*Visual

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.05

White Metal

Yellow Metal

Precipitate

Silt

Debris


Odor


Sand/Dirt


Appearance

Free Water

**Emulsified Water** 





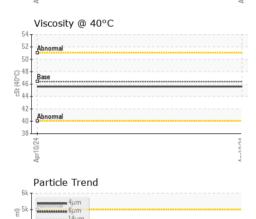


1) sajo

iling 3k

2

Ωk nr10/74

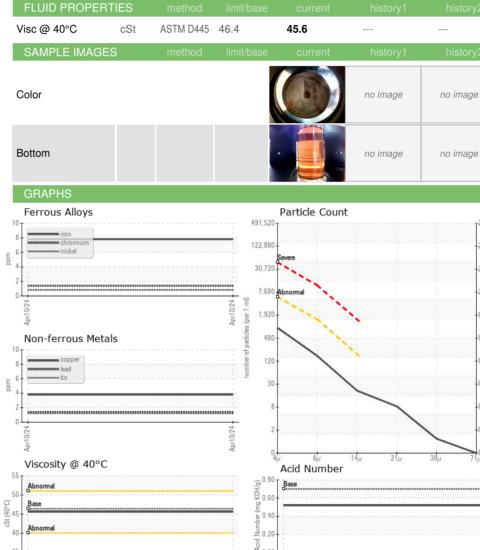

0.00

5

Apr10/24

NONE

NONE

NONE

NONE

NONE


NONE

NORML

NORML

NEG

NEG

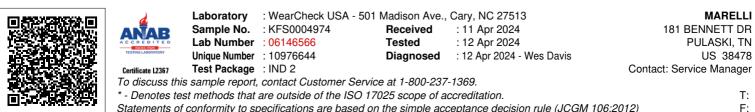

35

Apr10/24

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - MARPUL Page 2 of 2

ISC

:1999 Cle

14

4406