


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

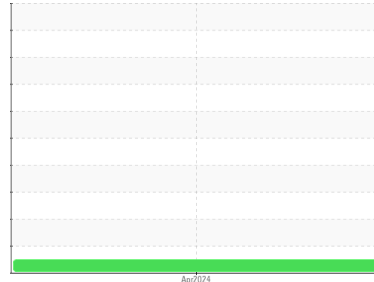

Machine Id
KUBOTA SUPER UDTZ UNIV TRANS - TO60002371
 Component
New (Unused) Oil
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation
 This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO60002371	---	---
Sample Date	Client Info			03 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>5	2	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>5	1	---	---
Lead	ppm	ASTM D5185m	>5	1	---	---
Copper	ppm	ASTM D5185m	>5	<1	---	---
Tin	ppm	ASTM D5185m	>5	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		1	---	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		17	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		8	---	---
Calcium	ppm	ASTM D5185m		3415	---	---
Phosphorus	ppm	ASTM D5185m		728	---	---
Zinc	ppm	ASTM D5185m		799	---	---
Sulfur	ppm	ASTM D5185m		2678	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5	---	---
Sodium	ppm	ASTM D5185m		10	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water	%	ASTM D6304		0.017	---	---
ppm Water	ppm	ASTM D6304		171	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3385	---	---
Particles >6µm		ASTM D7647	>1300	920	---	---
Particles >14µm		ASTM D7647	>160	106	---	---
Particles >21µm		ASTM D7647	>40	32	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/14	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.20	---	---

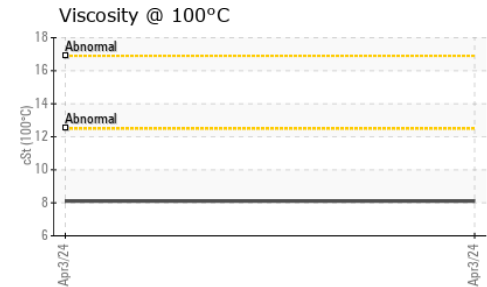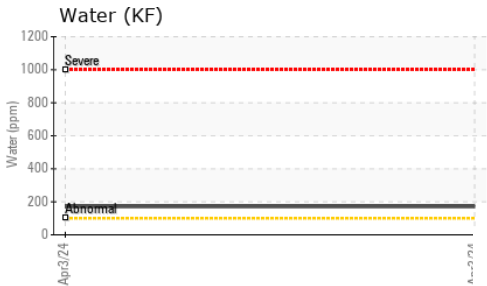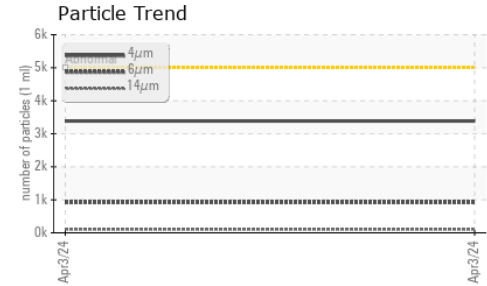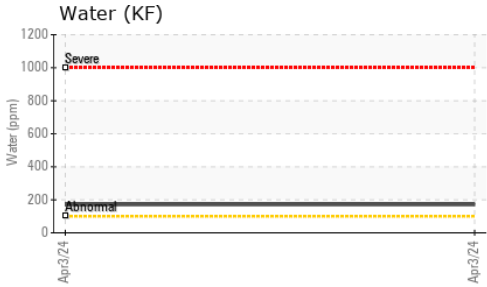

OIL ANALYSIS REPORT








VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	36.6	---	---
Visc @ 100°C	cSt	ASTM D445	8.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270	204	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

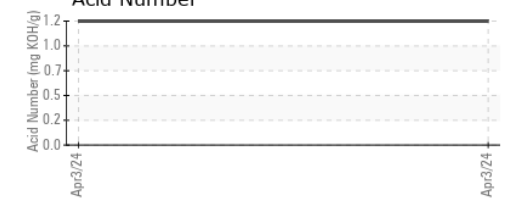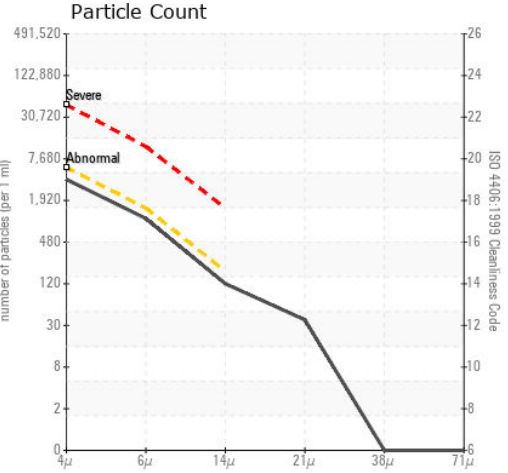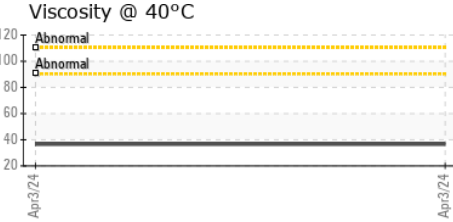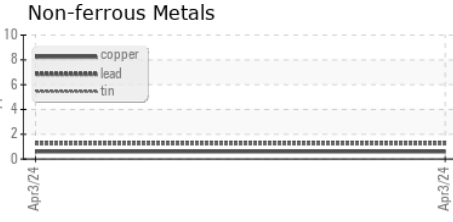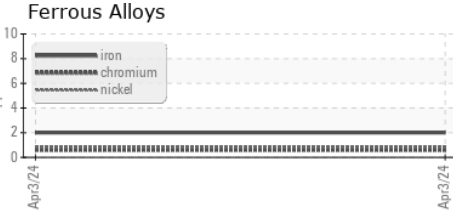

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO60002371
Lab Number : 06146582
Unique Number : 10976660
Test Package : IND 2 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, VI)

GREAT PLAINS MFG
 3861 S 9TH ST
 SALINA, KS
 US 67401

To discuss this sample report, contact Customer Service at 1-800-237-1369. craig.newcomer@greatplainsmfg.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T:
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: