




# OIL ANALYSIS REPORT

Sample Rating Trend

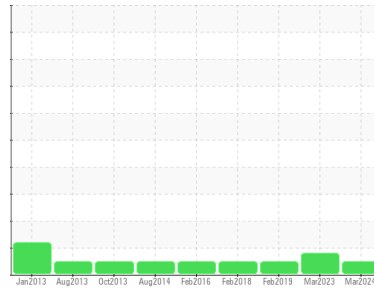

**NORMAL**



Machine Id  
**KAESER SFC 37 4225074 (S/N 1012)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC120653</b>	KC101629	KC79976
Sample Date	Client Info			<b>21 Mar 2024</b>	09 Mar 2023	21 Feb 2019
Machine Age	hrs	Client Info		<b>55598</b>	49122	30125
Oil Age	hrs	Client Info		<b>0</b>	21296	3905
Oil Changed	Client Info			<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	<1
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>1</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>7</b>	4	6
Tin	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	90	<b>&lt;1</b>	12	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	90	<b>2</b>	35	9
Calcium	ppm	ASTM D5185m	2	<b>4</b>	0	0
Phosphorus	ppm	ASTM D5185m		<b>3</b>	0	<1
Zinc	ppm	ASTM D5185m		<b>&lt;1</b>	8	21

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	8	0
Sodium	ppm	ASTM D5185m		<b>0</b>	12	4
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Water	%	ASTM D6304	>0.05	<b>0.005</b>	0.004	0.006
ppm Water	ppm	ASTM D6304	>500	<b>53</b>	48.6	60

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>2199</b>	2830	1540
Particles >6µm		ASTM D7647	>1300	<b>610</b>	1103	476
Particles >14µm		ASTM D7647	>80	<b>55</b>	91	49
Particles >21µm		ASTM D7647	>20	<b>12</b>	20	9
Particles >38µm		ASTM D7647	>4	<b>1</b>	2	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>18/16/13</b>	19/17/14	16/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.41</b>	0.35	0.386


# OIL ANALYSIS REPORT

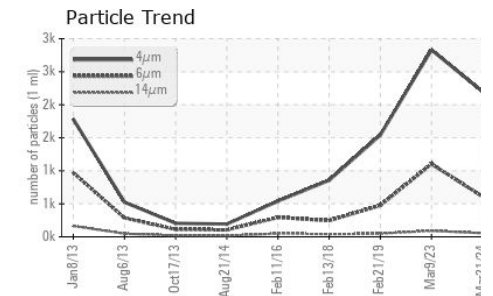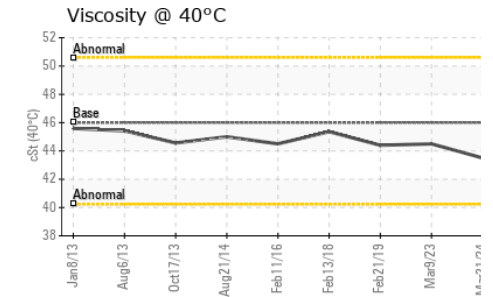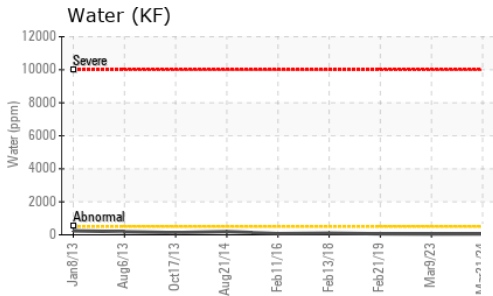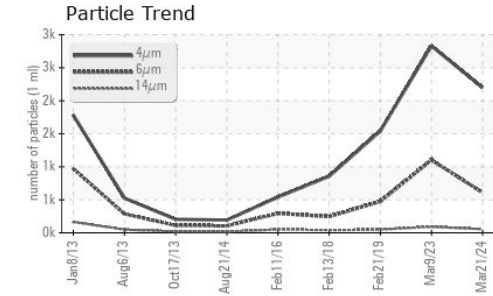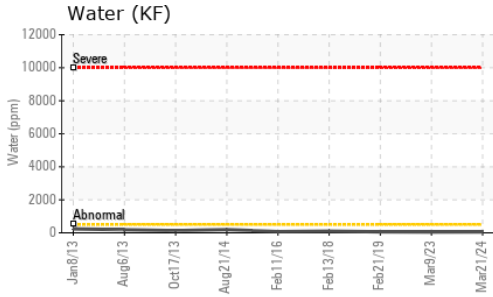






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	43.5	44.5	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

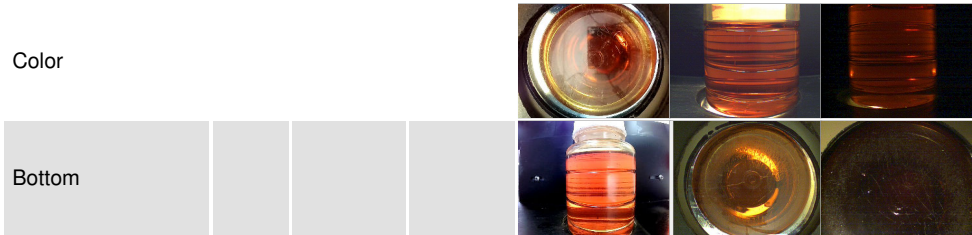

## GRAPHS

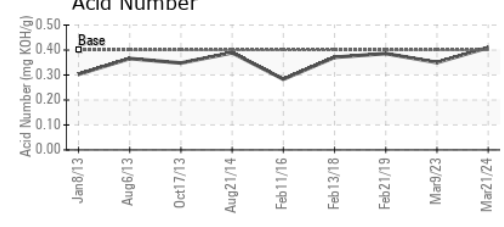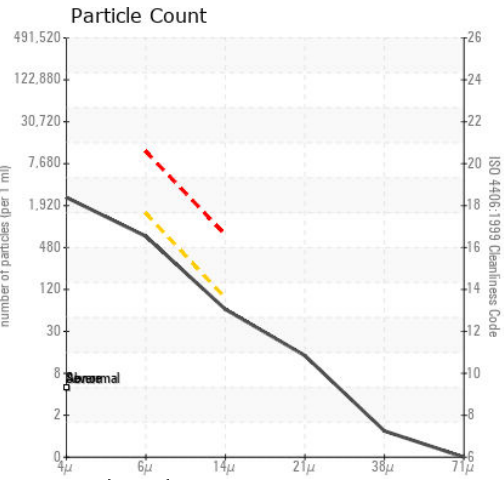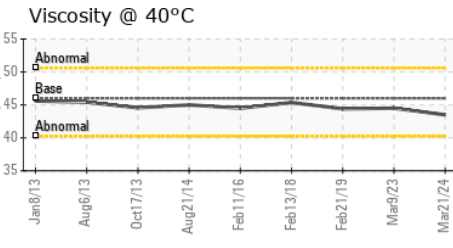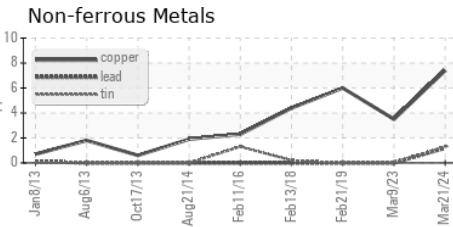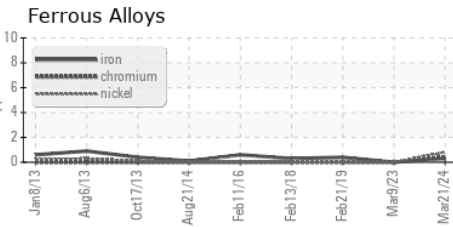

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC120653  
**Lab Number** : 06146599  
**Unique Number** : 10976677  
**Test Package** : IND 2  
**Received** : 11 Apr 2024  
**Tested** : 12 Apr 2024  
**Diagnosed** : 15 Apr 2024 - Angela Borella

**CVS PHARMACY**  
 1 GREAT VALLEY BLVD  
 WILKES BARRE, PA  
 US 18702  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)