




OIL ANALYSIS REPORT

Sample Rating Trend

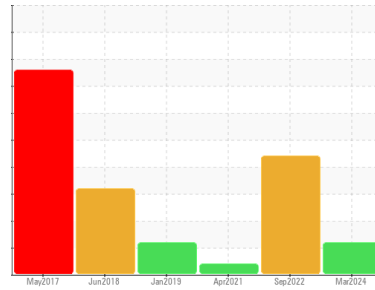

ISO



Machine Id
KAESER AS 30T 4087947 (S/N 1009)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA015401	KCP50642	KCP32734
Sample Date	Client Info		04 Mar 2024	12 Sep 2022	28 Apr 2021
Machine Age	hrs	Client Info	32798	29448	25289
Oil Age	hrs	Client Info	0	0	949
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ATTENTION	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<1	0	<1
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >3	<1	0	0
Titanium	ppm	ASTM D5185m >3	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >10	1	0	<1
Lead	ppm	ASTM D5185m >10	1	0	<1
Copper	ppm	ASTM D5185m >50	6	4	10
Tin	ppm	ASTM D5185m >10	1	0	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	10
Barium	ppm	ASTM D5185m 90	0	0	0
Molybdenum	ppm	ASTM D5185m	1	0	<1
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m 90	46	46	15
Calcium	ppm	ASTM D5185m 2	4	2	0
Phosphorus	ppm	ASTM D5185m	4	1	<1
Zinc	ppm	ASTM D5185m	40	15	48
Sulfur	ppm	ASTM D5185m	25361	21792	14261

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	0	0	0
Sodium	ppm	ASTM D5185m	16	7	14
Potassium	ppm	ASTM D5185m >20	4	3	2
Water	%	ASTM D6304 >0.05	0.018	▲ 0.992	0.014
ppm Water	ppm	ASTM D6304 >500	182	▲ 9920	142.2






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		4661	---	---
Particles >6µm	ASTM D7647 >1300		● 1311	---	---
Particles >14µm	ASTM D7647 >80		● 112	---	---
Particles >21µm	ASTM D7647 >20		27	---	---
Particles >38µm	ASTM D7647 >4		1	---	---
Particles >71µm	ASTM D7647 >3		0	---	---
Oil Cleanliness	ISO 4406 (c) >--/17/13		● 19/18/14	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.35	0.34	0.271

OIL ANALYSIS REPORT

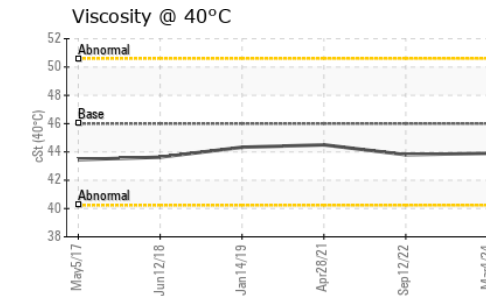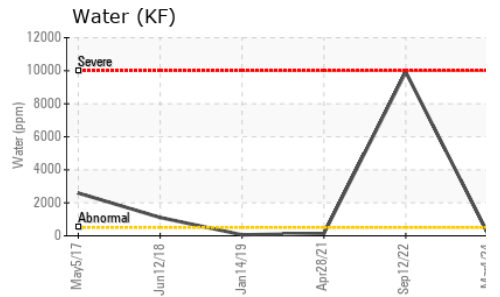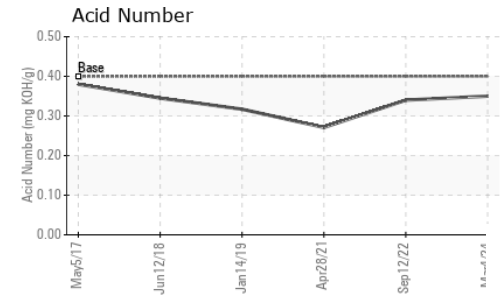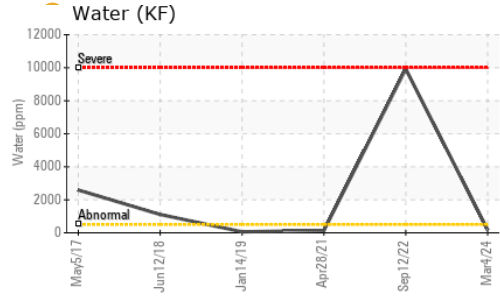
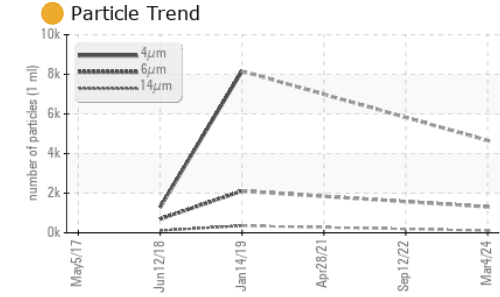


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	● HAZY	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	NEG
Free Water	scalar	*Visual		▲ >10%	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.9	43.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

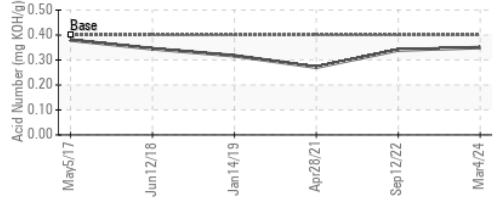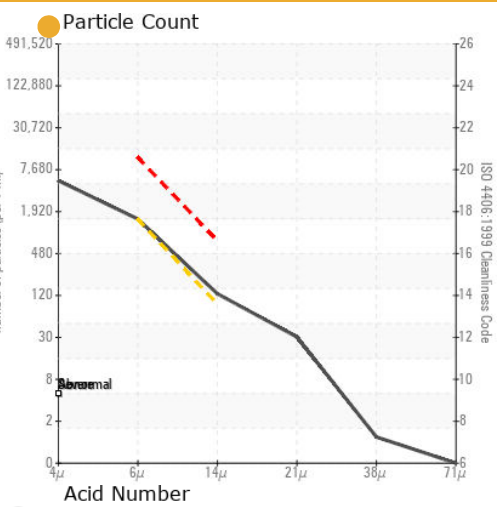

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA015401 **Received** : 11 Apr 2024
Lab Number : 06146617 **Tested** : 12 Apr 2024
Unique Number : 10976695 **Diagnosed** : 16 Apr 2024 - Angela Borella
Test Package : IND 2 (Additional Tests: KF, PrtCount)

SHERWIN WILLIAMS #1413
 8040 BLANKENSHIP DR
 HOUSTON, TX
 US 77055
 Contact: BENNETT HERRICK
 bennett.j.herrick@sherwin.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)