


# **OIL ANALYSIS REPORT**

### Sample Rating Trend



**NORMAL** 



Machine Id

# FRICK 4 (S/N D0199WFMFTIAA03)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| 12015 Mar2016 Jun2017 Jun2016 Ju2018 Sep2020 Sep2021 Sep2022 Sep2023 |         |              |            |             |             |             |  |
|--|---------|--------------|------------|-------------|-------------|-------------|--|
| SAMPLE INFORM  | MATION  | method       | limit/base | current     | history1    | history2    |  |
| Sample Number  |         | Client Info  |            | USP0007846  | USP0005194  | USP0001608  |  |
| Sample Date  |         | Client Info  |            | 02 Apr 2024 | 02 Jan 2024 | 27 Sep 2023 |  |
| Machine Age  | hrs     | Client Info  |            | 104200      | 103700      | 102300      |  |
| Oil Age  | hrs     | Client Info  |            | 36300       | 35800       | 26200       |  |
| Oil Changed  |         | Client Info  |            | N/A         | N/A         | N/A         |  |
| Sample Status  |         |              |            | NORMAL      | NORMAL      | NORMAL      |  |
| WEAR METALS  |         | method       | limit/base | current     | history1    | history2    |  |
| Iron   | ppm     | ASTM D5185m  | >8         | 2           | 1           | <1          |  |
| Chromium   | ppm     | ASTM D5185m  | >2         | <1          | <1          | 0           |  |
| Nickel   | ppm     | ASTM D5185m  |            | <1          | 0           | 0           |  |
| Titanium   | ppm     | ASTM D5185m  |            | <1          | <1          | 0           |  |
| Silver   | ppm     | ASTM D5185m  | >2         | 0           | 0           | 0           |  |
| Aluminum   | ppm     | ASTM D5185m  | >3         | 1           | 0           | 0           |  |
| Lead   | ppm     | ASTM D5185m  | >2         | 1           | 0           | 0           |  |
| Copper   | ppm     | ASTM D5185m  | >8         | <1          | <1          | 0           |  |
| Tin  | ppm     | ASTM D5185m  | >4         | 1           | 0           | 0           |  |
| Vanadium   | ppm     | ASTM D5185m  |            | <1          | 0           | 0           |  |
| Cadmium  | ppm     | ASTM D5185m  |            | <1          | 0           | 0           |  |
| ADDITIVES  |         | method       | limit/base | current     | history1    | history2    |  |
| Boron  | ppm     | ASTM D5185m  |            | 0           | 0           | 0           |  |
| Barium   | ppm     | ASTM D5185m  |            | 0           | 0           | 0           |  |
| Molybdenum   | ppm     | ASTM D5185m  |            | <1          | 0           | 0           |  |
| Manganese  | ppm     | ASTM D5185m  |            | <1          | 0           | 0           |  |
| Magnesium  | ppm     | ASTM D5185m  |            | <1          | 0           | 0           |  |
| Calcium  | ppm     | ASTM D5185m  |            | 0           | 0           | 0           |  |
| Phosphorus   | ppm     | ASTM D5185m  |            | 0           | 0           | <1          |  |
| Zinc   | ppm     | ASTM D5185m  |            | 0           | 0           | 0           |  |
| Sulfur   | ppm     | ASTM D5185m  | 50         | 0           | 0           | 0           |  |
| CONTAMINANTS   | ;       | method       | limit/base | current     | history1    | history2    |  |
| Silicon  | ppm     | ASTM D5185m  | >15        | 0           | 0           | <1          |  |
| Sodium   | ppm     | ASTM D5185m  |            | 0           | 0           | 0           |  |
| Potassium  | ppm     | ASTM D5185m  | >20        | <1          | <1          | 0           |  |
| Water  | %       | ASTM D6304   | >0.01      | 0.005       | 0.006       | 0.007       |  |
| ppm Water  | ppm     | ASTM D6304   | >100       | 58          | 69          | 74.0        |  |
| FLUID CLEANLIN   | IESS    | method       | limit/base | current     | history1    | history2    |  |
| Particles >4µm   |         | ASTM D7647   | >10000     | 762         | 3949        | 1957        |  |
| Particles >6µm   |         | ASTM D7647   | >2500      | 132         | 418         | 326         |  |
| Particles >14µm  |         | ASTM D7647   | >320       | 6           | 17          | 11          |  |
| Particles >21µm  |         | ASTM D7647   | >80        | 2           | 5           | 2           |  |
| Particles >38µm  |         | ASTM D7647   | >20        | 0           | 0           | 0           |  |
| Particles >71µm  |         | ASTM D7647   | >4         | 0           | 0           | 0           |  |
| Oil Cleanliness  |         | ISO 4406 (c) | >20/18/15  | 17/14/10    | 19/16/11    | 18/16/11    |  |
| FLUID DEGRADA  | TION    | method       | limit/base | current     | history1    | history2    |  |
| A si al Niversala au (ANI)   | I/OII/- | ACTM DOZA    | 0.005      | 0.014       | 0.015       | 0.040       |  |

Acid Number (AN)

0.015


0.014

mg KOH/g ASTM D974 0.005


0.013





## **OIL ANALYSIS REPORT**



| 15k -     | 4 <i>j</i><br>1 | um<br>um<br>1µm |          |           |            |          |          |          |
|-----------|-----------------|-----------------|----------|-----------|------------|----------|----------|----------|
| 15k - Abr | normal          | A               |          |           |            |          | ٨        |          |
| 5k -      |                 | W               |          |           |            |          | 1        | ΛΛ       |
| Ok L      | Mar21/16        | Jun29/17        | Jun28/18 | V BL/TINC | Sep30/20 🔨 | Sep29/21 | Sep30/22 | Sep27/23 |








| VISUAL                  |        | method  |       |       |       | history2 |
|-------------------------|--------|---------|-------|-------|-------|----------|
| White Metal             | scalar | *Visual | NONE  | NONE  | NONE  | NONE     |
| Yellow Metal            | scalar | *Visual | NONE  | NONE  | NONE  | NONE     |
| Precipitate             | scalar | *Visual | NONE  | NONE  | NONE  | NONE     |
| Silt                    | scalar | *Visual | NONE  | NONE  | NONE  | NONE     |
| Debris                  | scalar | *Visual | NONE  | NONE  | NONE  | NONE     |
| Sand/Dirt               | scalar | *Visual | NONE  | NONE  | NONE  | NONE     |
| Appearance              | scalar | *Visual | NORML | NORML | NORML | NORML    |
| Odor                    | scalar | *Visual | NORML | NORML | NORML | NORML    |
| <b>Emulsified Water</b> | scalar | *Visual | >0.01 | NEG   | NEG   | NEG      |
| Free Water              | scalar | *Visual |       | NEG   | NEG   | NEG      |
|                         |        |         |       |       |       |          |

| 1 LOID I NOI LITTILS |     | method illilibase |      |      | HISTOLYT | HISTOLYZ |  |
|----------------------|-----|-------------------|------|------|----------|----------|--|
| Visc @ 40°C          | cSt | ASTM D445         | 65.6 | 66.8 | 66.6     | 66.0     |  |

Color

**Bottom** 



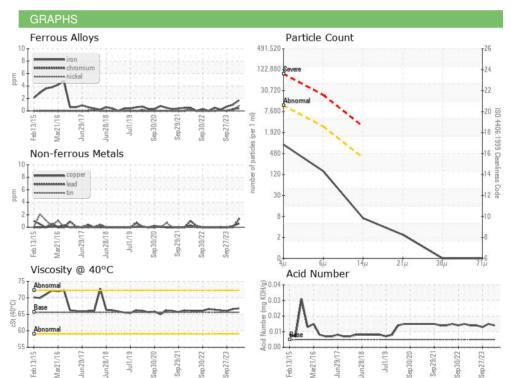





Laboratory Sample No.

: USP0007846 Lab Number : 06146634

Unique Number : 10976712

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 11 Apr 2024

**Tested** : 12 Apr 2024 Diagnosed : 15 Apr 2024 - Doug Bogart

Test Package : IND 2 Certificate 12367

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KENT, WA

Contact:

US

T:

F:

**CONAGRA FOODS**