




OIL ANALYSIS REPORT

Sample Rating Trend

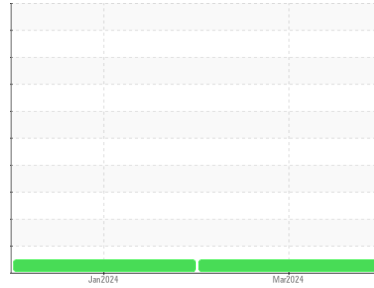

NORMAL



Machine Id

24

Component

Gasoline Engine

Fluid

MOTORCRAFT SYNTHETIC BLEND 5W20 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data updates to update BN results.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			RW0004971	RW0004967	---
Sample Date	Client Info			25 Mar 2024	27 Jan 2024	---
Machine Age	mls	Client Info		208459	0	---
Oil Age	mls	Client Info		0	0	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	2	9	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>40	2	2	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>155	<1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		72	37	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		74	67	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		540	460	---
Calcium	ppm	ASTM D5185m		1200	896	---
Phosphorus	ppm	ASTM D5185m		752	668	---
Zinc	ppm	ASTM D5185m		865	755	---
Sulfur	ppm	ASTM D5185m		3863	2653	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	9	14	---
Sodium	ppm	ASTM D5185m	>400	<1	4	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Fuel	%	ASTM D3524	>4.0	<1.0	<1.0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	12.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	24.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.4	18.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	7.5	4.32	4.20	---











OIL ANALYSIS REPORT

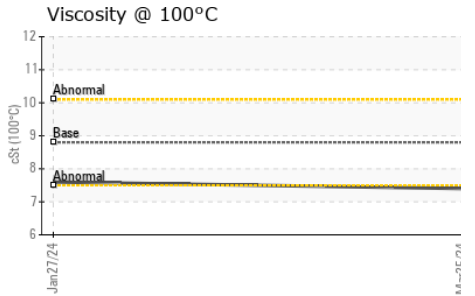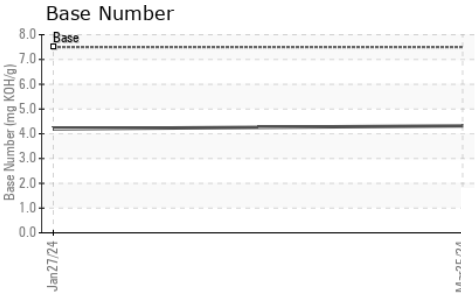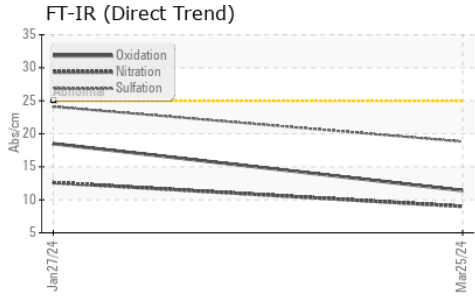

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 8.8	7.4	7.6	---

GRAPHS

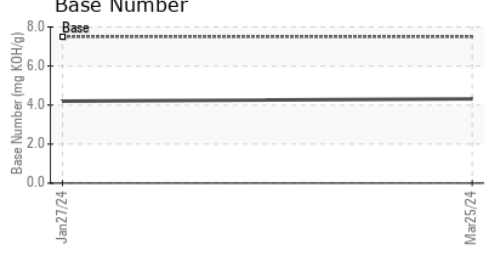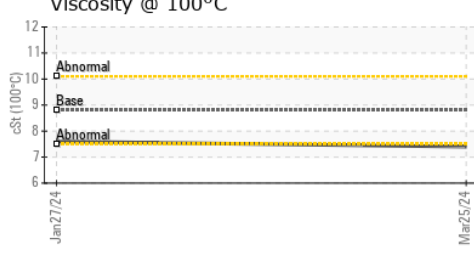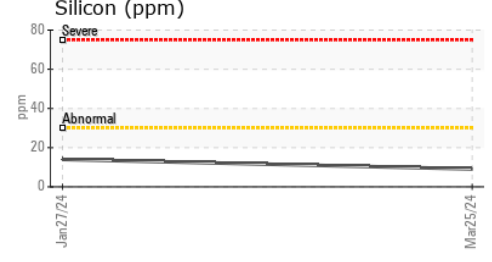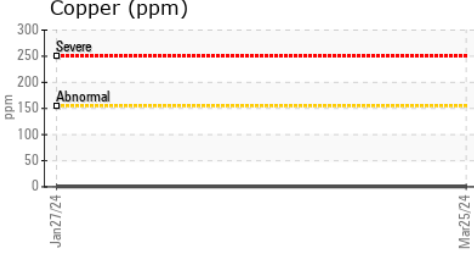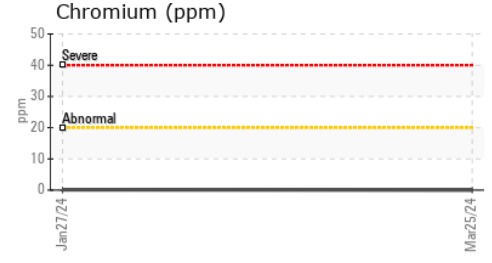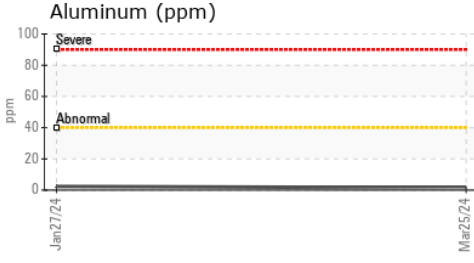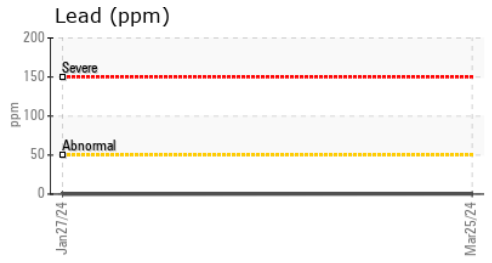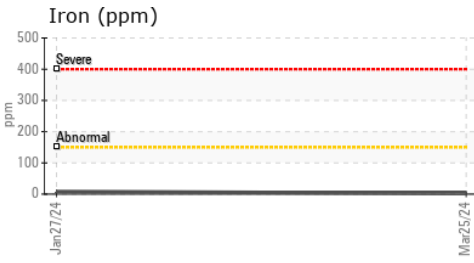

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0004971 **Received** : 11 Apr 2024
Lab Number : **06146729** **Tested** : 17 Apr 2024
Unique Number : 10976807 **Diagnosed** : 18 Apr 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel, TBN)

DOBSON INDUSTRIAL
 3660 N EUCLID AVE
 BAY CITY, MI
 US 48706

Contact: SERVICE MANAGER
 mechanics@dobsonindustrial.com
 T: (989)684-7131
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)