




OIL ANALYSIS REPORT



Machine Id
VOLVO L90G 617183
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (5 GAL)

Sample Rating Trend

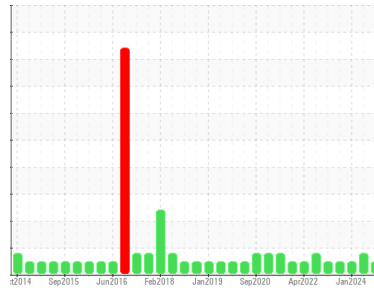

NORMAL

DIAGNOSIS

- Recommendation**
 Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is no indication of any contamination in the oil.
- Fluid Condition**
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	ML0000025	ML0000033	VCP447907
Sample Date	Client Info	08 Apr 2024	29 Feb 2024	11 Jan 2024
Machine Age	hrs	29078	29078	28818
Oil Age	hrs	250	260	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >6.0	<1.0	<1.0	<1.0
Water	WC Method >0.1	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	10	11	7
Chromium	ppm ASTM D5185m >10	1	<1	0
Nickel	ppm ASTM D5185m >10	2	2	<1
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >10	8	▲ 16	6
Lead	ppm ASTM D5185m >20	1	0	<1
Copper	ppm ASTM D5185m >15	1	<1	1
Tin	ppm ASTM D5185m >10	1	0	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	289	329	347
Barium	ppm ASTM D5185m	<1	0	0
Molybdenum	ppm ASTM D5185m	107	106	106
Manganese	ppm ASTM D5185m	1	<1	<1
Magnesium	ppm ASTM D5185m	565	672	533
Calcium	ppm ASTM D5185m	1503	1655	1431
Phosphorus	ppm ASTM D5185m	819	934	961
Zinc	ppm ASTM D5185m	913	1048	1124
Sulfur	ppm ASTM D5185m	2702	3161	3031

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	8	7	7
Sodium	ppm ASTM D5185m >50	<1	<1	<1
Potassium	ppm ASTM D5185m >20	1	0	<1

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.3	0.3
Nitration	Abs/cm *ASTM D7624 >20	6.7	6.3	6.3
Sulfation	Abs/.1mm *ASTM D7415 >30	22.2	22.0	22.0

FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.8	16.0	15.7
Base Number (BN)	mg KOH/g ASTM D2896	8.7	8.4	8.1

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

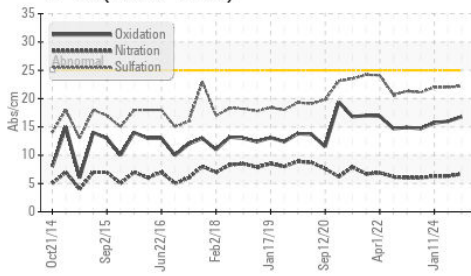

Base Number

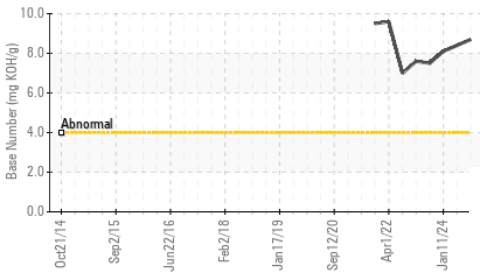

Viscosity @ 100°C

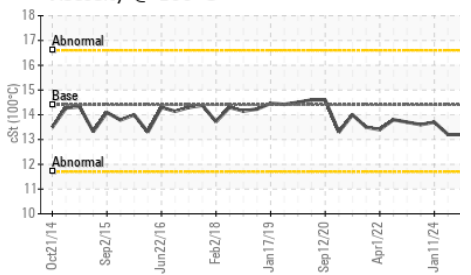


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	13.7

GRAPHS


Ferrous Alloys

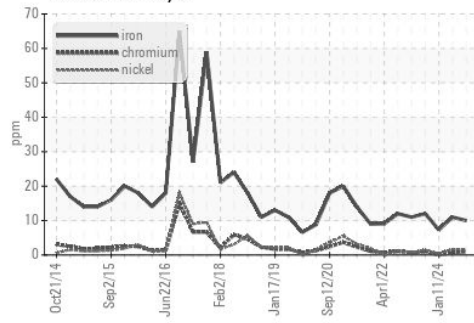


Non-ferrous Metals

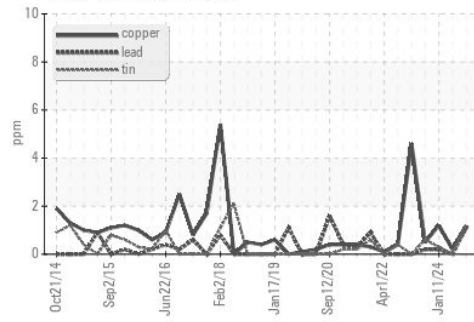

Viscosity @ 100°C

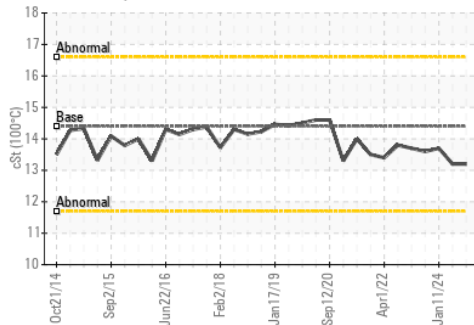

Base Number

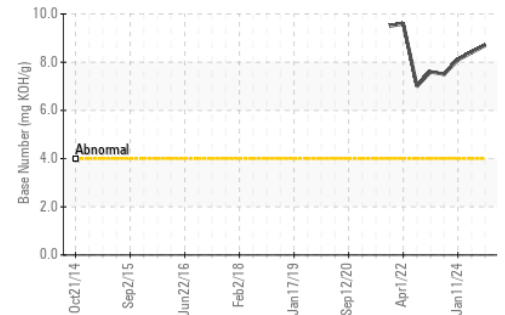

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ML0000025

Lab Number : 06146891

Unique Number : 10976969

Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 12 Apr 2024

Tested : 15 Apr 2024

Diagnosed : 15 Apr 2024 - Sean Felton

McCLUNG-LOGAN EQUIPMENT CO - BALTIMORE

4601 WASHINGTON BOULEVARD

BALTIMORE, MD

US 21227

Contact: MARK CIULLA

mciulla@mcclung-logan.com

T: (410)242-6500

F: (410)242-7835