

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

MACHINE 18 - PROGRAM (S/N 202505-5-056)

Hydraulic System

SAFETY-KLEEN PERFORMANCE PLUS HYDR

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

						, '
AULIC AW 46 (2	0 GAL			Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0910081		
Sample Date		Client Info		01 Apr 2024		
lachine Age	mths	Client Info		0		
Dil Age	mths	Client Info		0		
Dil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Vater		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	1		
Chromium	ppm	ASTM D5185m	>20	<1		
lickel	ppm	ASTM D5185m	>20	<1		
itanium	ppm	ASTM D5185m		<1		
ilver	ppm	ASTM D5185m		<1		
luminum	ppm	ASTM D5185m	>20	1		
ead	ppm	ASTM D5185m	>20	1		
opper	ppm	ASTM D5185m	>20	2		
in	ppm	ASTM D5185m	>20	1		
anadium	ppm	ASTM D5185m	720	<1		
anaulum		ASTM D5185m		1		
	ppm					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1		
arium	ppm	ASTM D5185m		0		
lolybdenum	ppm	ASTM D5185m		2		
langanese	ppm	ASTM D5185m		<1		
lagnesium	ppm	ASTM D5185m		10		
alcium	ppm	ASTM D5185m	48	67		
hosphorus	ppm	ASTM D5185m	340	303		
inc	ppm	ASTM D5185m	430	353		
ulfur	ppm	ASTM D5185m		823		
CONTAMINANTS	3	method	limit/base	current	history1	history2
ilicon	ppm	ASTM D5185m	>15	0		
odium	ppm	ASTM D5185m		0		
otassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	476		
articles >6µm		ASTM D7647	>1300	66		
articles >14μm		ASTM D7647	>160	6		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
articles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/13/10		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2


Acid Number (AN)

mg KOH/g ASTM D8045

Contact/Location: ERIC LOYA - CONSAM



OIL ANALYSIS REPORT

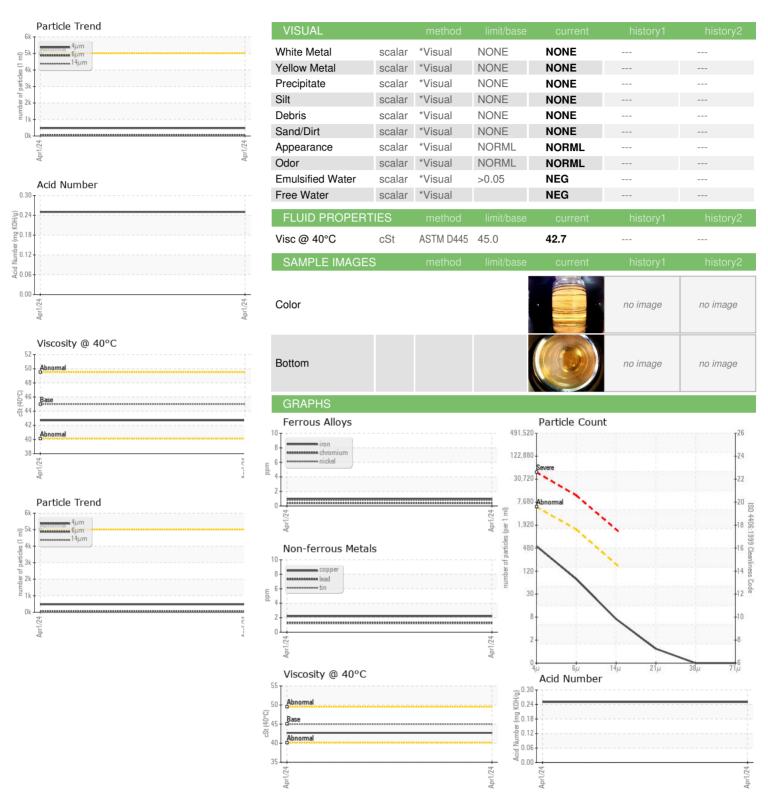





Certificate 12367

Laboratory Sample No.

Lab Number : 06147300 Unique Number : 10977378 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0910081

Received : 12 Apr 2024 **Tested** : 15 Apr 2024 Diagnosed

: 15 Apr 2024 - Wes Davis

Altium Packaging - SAMUELSON - Plant 1302A 1070 SAMUELSON ST CITY OF INDUSTRY, CA US 91748-1219 Contact: ERIC LOYA

Eric.Loya@altiumpkg.com T:

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Report Id: CONSAM [WUSCAR] 06147300 (Generated: 04/15/2024 14:36:49) Rev: 1

Contact/Location: ERIC LOYA - CONSAM

F: