




OIL ANALYSIS REPORT

Sample Rating Trend

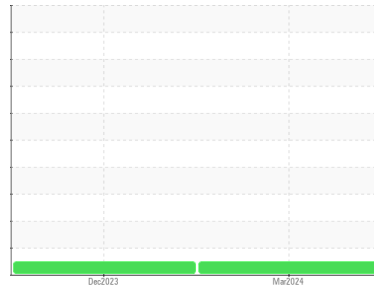

NORMAL



Area
RRHP HPU 699 Elevation
 Machine Id
029-100-412 Unit 1 HPU
 Component
Hydraulic System
 Fluid
MOBIL DTE 26 (1446 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0927624	WC0879265	---
Sample Date	Client Info			06 Mar 2024	04 Dec 2023	---
Machine Age	hrs	Client Info		11055	9975	---
Oil Age	hrs	Client Info		11055	9975	---
Oil Changed	Client Info			Not Chngd	Filtered	---
Sample Status				NORMAL	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>20	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	1	0	---
Lead	ppm	ASTM D5185m	>20	1	0	---
Copper	ppm	ASTM D5185m	>20	1	0	---
Tin	ppm	ASTM D5185m	>20	1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		1	0	---
Calcium	ppm	ASTM D5185m		136	120	---
Phosphorus	ppm	ASTM D5185m		492	456	---
Zinc	ppm	ASTM D5185m		691	652	---
Sulfur	ppm	ASTM D5185m		8648	7731	---






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	1	---
Sodium	ppm	ASTM D5185m		<1	1	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water	%	ASTM D6304	>0.05	0.003	0.007	---
ppm Water	ppm	ASTM D6304	>500	30	77	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	69	167	---
Particles >6µm		ASTM D7647	>1300	22	35	---
Particles >14µm		ASTM D7647	>160	5	5	---
Particles >21µm		ASTM D7647	>40	2	3	---
Particles >38µm		ASTM D7647	>10	0	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	13/12/10	15/12/10	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.603	0.68	---




OIL ANALYSIS REPORT

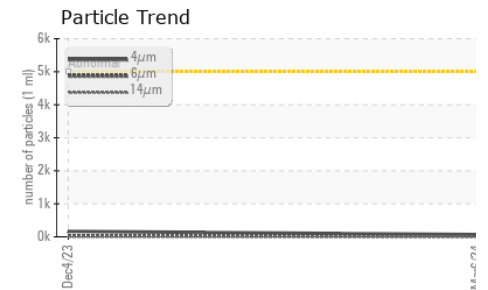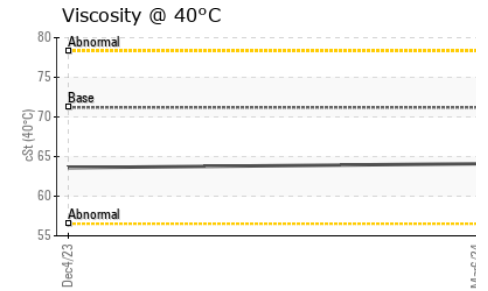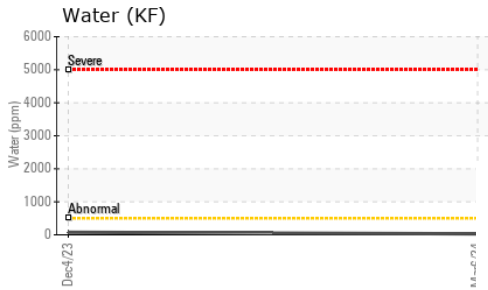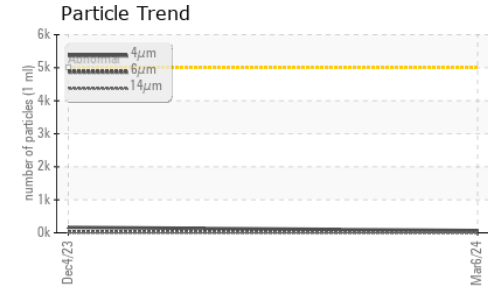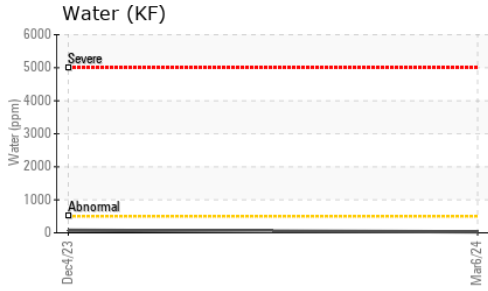





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	71.2	64.1	63.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

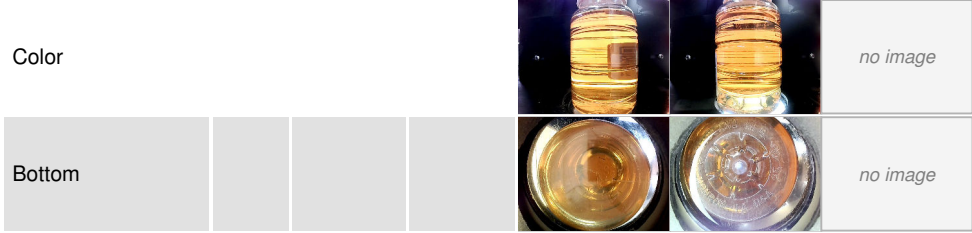

GRAPHS

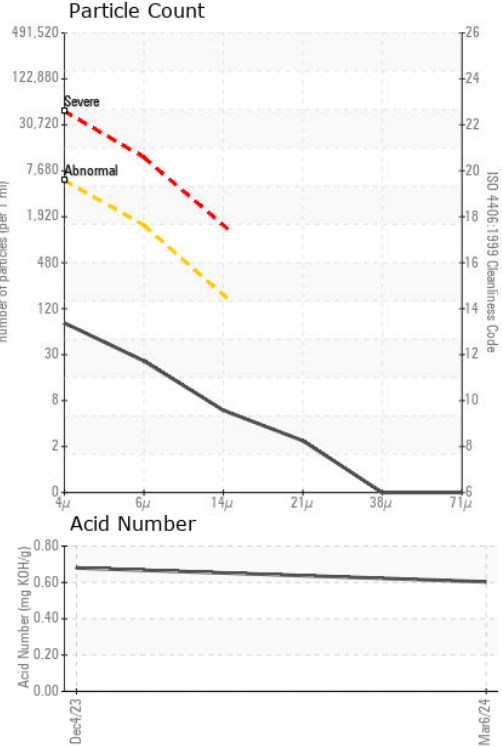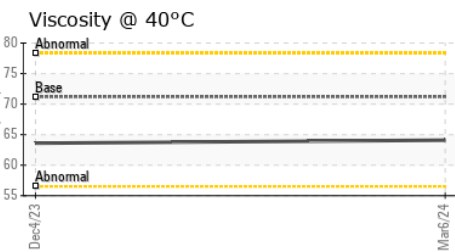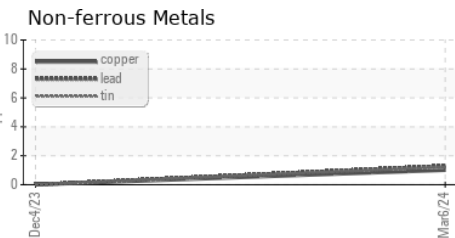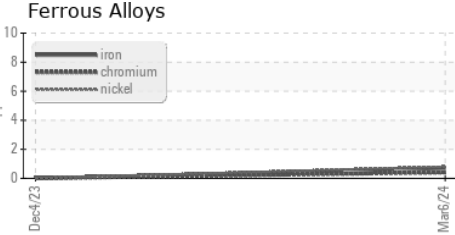

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0927624
Lab Number : 06147335
Unique Number : 10977413
Test Package : PLANT

Missouri River Energy Services - Red Rock Hydro
 1004 216th Place
 Pella, IA
 CA 50219

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Vern Cochran
 vern.cochran@mrenergy.com
 T: (605)357-6920
 F: