

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

### **3264461 (S/N 2439)** Component **Compressor**

#### Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013818		
Sample Date		Client Info		19 Mar 2024		
Machine Age	hrs	Client Info		16311		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	6		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	1		
Lead	ppm	ASTM D5185m	>10	1		
Copper	ppm		>50	10		
Tin	ppm	ASTM D5185m	>10	1		
Vanadium	ppm	ASTM D5185m	>10	، <1		
Cadmium		ASTM D5185m		1		
	ppm	ASTIVI DOTODIII		1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	24		
Calcium	ppm	ASTM D5185m	2	3		
Phosphorus	ppm	ASTM D5185m		4		
Zinc	ppm	ASTM D5185m		33		
Sulfur	ppm	ASTM D5185m		18815		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		4		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304		0.010		
ppm Water	ppm	ASTM D6304	>500	105		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1968		
Particles >6µm		ASTM D7647	>1300	596		
Particles >14µm		ASTM D7647	>80	66		
Particles >21µm		ASTM D7647	>20	21		
Particles >38µm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.41		



# **OIL ANALYSIS REPORT**

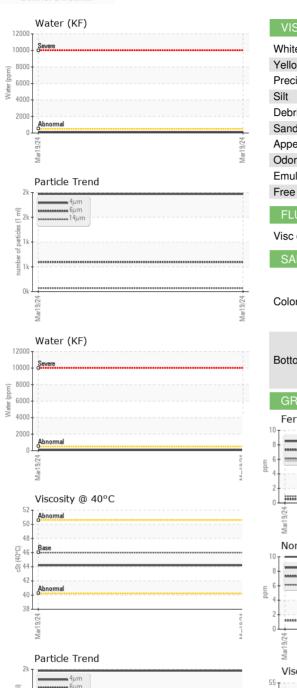




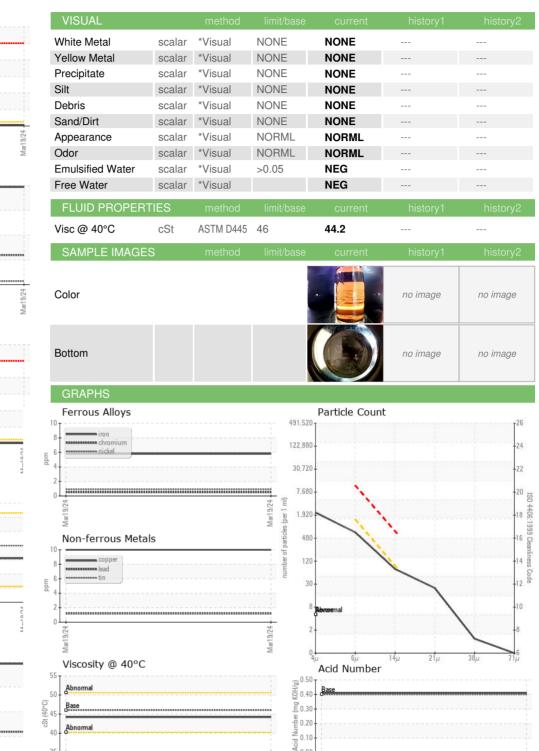

0.00

Mar19

Mar19/24 -

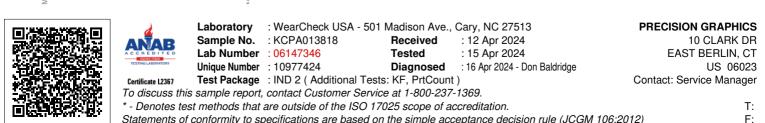

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

35

Mar19/24

Contact/Location: Service Manager - PREEASCT

9/24