

# **OIL ANALYSIS REPORT**

### Sample Rating Trend



Machine Id

# FES TYSNRH B309 (S/N 2512317)

Refrigeration Compressor

USPI 1009-68 SC (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


d/011 Mar2013 Nov2014 Oct2016 Apr2016 Oct2019 Janc2021 Apr2022						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0006748	USP0004991	USP239135
Sample Date		Client Info		11 Apr 2024	15 Jan 2024	27 Oct 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	<1	<1	<1
Chromium	ppm	ASTM D5185m	>2	<1	<1	0
Nickel	ppm	ASTM D5185m		<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>3	1	0	0
Lead	ppm	ASTM D5185m	>2	1	0	0
Copper	ppm	ASTM D5185m	>8	<1	0	<1
Tin	ppm	ASTM D5185m	>4	1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	<1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	15
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	3	2
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water	%	ASTM D6304	>0.01	0.006	0.003	0.001
ppm Water	ppm	ASTM D6304	>100	61	35	14.5
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1074	4978	10688
Particles >6µm		ASTM D7647	>2500	306	1088	1877
Particles >14μm		ASTM D7647	>320	24	23	50
Particles >21µm		ASTM D7647	>80	5	3	6
Particles >38μm		ASTM D7647	>20	0	0	0
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	17/15/12	19/17/12	21/18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.029





## **OIL ANALYSIS REPORT**

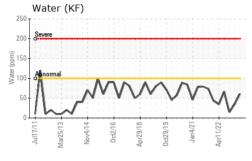










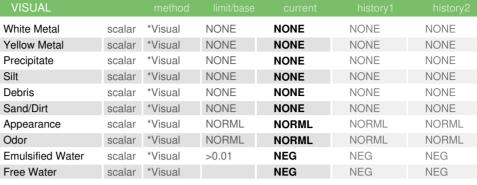


I LOID I NOI LI	IIILO	memou			HISTOLAL	HISTORYZ
Visc @ 40°C	cSt	ASTM D445	67	64.0	63.3	62.1

SAIVII	LL IIVIAGLS	memou	
Color			
Coloi			





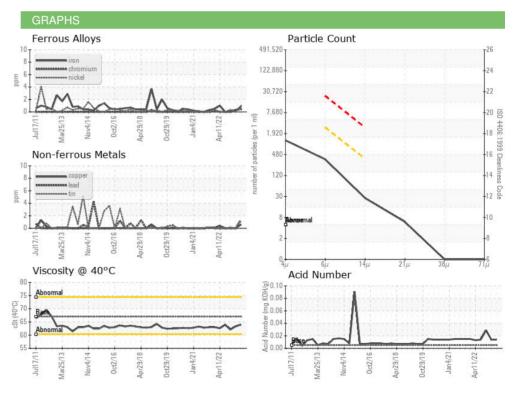





Certificate 12367

Laboratory Sample No. Lab Number

: USP0006748 : 06147372 Unique Number : 10977450 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 12 Apr 2024

**Tested** : 15 Apr 2024 Diagnosed : 15 Apr 2024 - Doug Bogart

**TYSON-NORTH RICHLAND HILLS-USP** 

6350 BLOWN CT NORTH RICHLAND HILLS, TX US 76180

Contact: JOHN MORGAN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (817)514-3519 F: