




OIL ANALYSIS REPORT

Sample Rating Trend

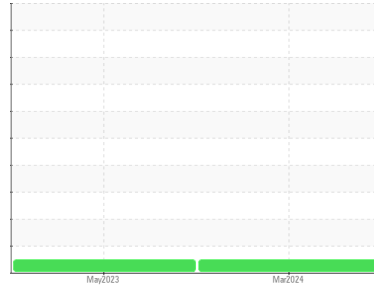

NORMAL



Machine Id
EX-401
 Component
Right Swing Drive
 Fluid
SAE 50W (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number | Client Info | | | WC0909402 | WC0705314 | --- |
| Sample Date | Client Info | | | 19 Mar 2024 | 22 May 2023 | --- |
| Machine Age | hrs | Client Info | | 3784 | 2781 | --- |
| Oil Age | hrs | Client Info | | 0 | 2781 | --- |
| Oil Changed | Client Info | | | N/A | Not Changd | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.2 | NEG | NEG | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >400 | 24 | 20 | --- |
| Chromium | ppm | ASTM D5185m | >10 | 0 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | 1 | --- |
| Lead | ppm | ASTM D5185m | >50 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m | >200 | 0 | <1 | --- |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | --- |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 0 | 0 | --- |
| Barium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 1 | 2 | --- |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | | 12 | 13 | --- |
| Calcium | ppm | ASTM D5185m | | 2605 | 2837 | --- |
| Phosphorus | ppm | ASTM D5185m | | 922 | 930 | --- |
| Zinc | ppm | ASTM D5185m | | 1064 | 1150 | --- |
| Sulfur | ppm | ASTM D5185m | | 7789 | 9145 | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >50 | 12 | 13 | --- |
| Sodium | ppm | ASTM D5185m | | 2 | 0 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | --- |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | --- |
| Free Water | scalar | *Visual | | NEG | NEG | --- |






OIL ANALYSIS REPORT

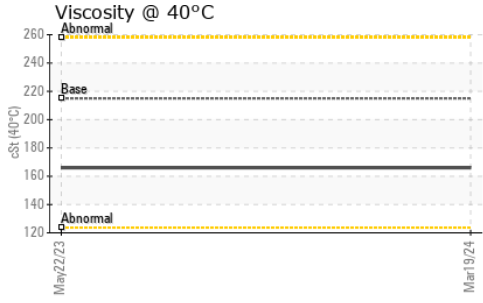

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 215 | 166 | 166 | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|----------|----------|----------|
| Color | | | no image | no image | no image |
| Bottom | | | no image | no image | no image |

GRAPHS

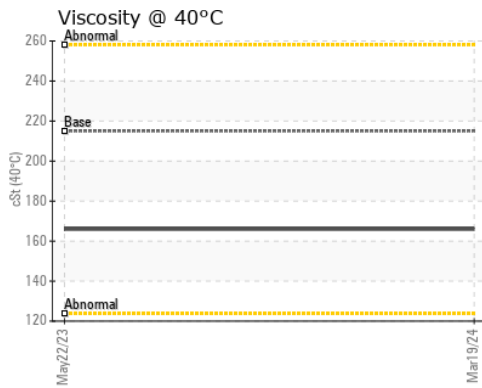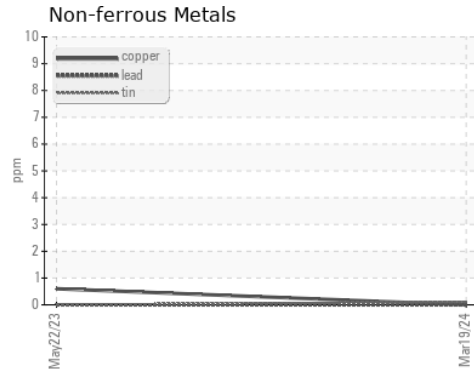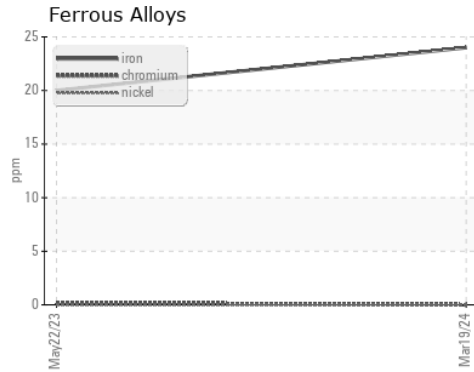

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0909402 **Received** : 12 Apr 2024
Lab Number : 06147784 **Tested** : 15 Apr 2024
Unique Number : 10977862 **Diagnosed** : 16 Apr 2024 - Don Baldrige
Test Package : FLEET

E.C. PACE CO.
 1811 HOLLINS RD.
 ROANOKE, VA
 US 24012
 Contact: EDDIE SECO
 ESECO@ECPACE.COM
 T: (276)266-5849
 F: (540)343-6909

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)