




FUEL REPORT

Sample Rating Trend

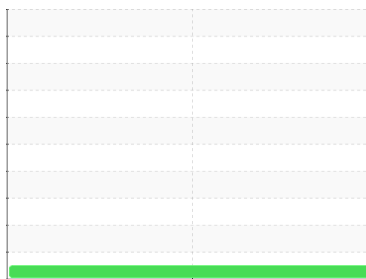

NORMAL



Machine Id
JCB 270T 3233651
 Component
Diesel Fuel
 Fluid
No.2 DIESEL FUEL (ULTRALOW SULPHUR) (27 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is a moderate amount of particulates present in the fuel. The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			JCBDF04593	---	---
Sample Date	Client Info			09 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Sample Status				NORMAL	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298	0.839	0.867	---	---
Fuel Color	text	*Visual Screen	Yellow	Yellow	---	---
ASTM Color	scalar	*ASTM D1500		L3.0	---	---
Visc @ 40°C	cSt	ASTM D445	3.0	3.05	---	---
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	68.7	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	0	---	---
Sulfur (UVF)	ppm	ASTM D5453		11	---	---






DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	173	---	---
5% Distillation Point	°C	ASTM D86		204	---	---
10% Distill Point	°C	ASTM D86	201	219	---	---
15% Distillation Point	°C	ASTM D86		229	---	---
20% Distill Point	°C	ASTM D86	216	238	---	---
30% Distill Point	°C	ASTM D86	230	251	---	---
40% Distill Point	°C	ASTM D86	243	263	---	---
50% Distill Point	°C	ASTM D86	255	274	---	---
60% Distill Point	°C	ASTM D86	267	285	---	---
70% Distill Point	°C	ASTM D86	280	297	---	---
80% Distill Point	°C	ASTM D86	295	310	---	---
85% Distillation Point	°C	ASTM D86		318	---	---
90% Distill Point	°C	ASTM D86	310	328	---	---
95% Distillation Point	°C	ASTM D86		344	---	---
Final Boiling Point	°C	ASTM D86	341	353	---	---
Distillation Residue	%	ASTM D86	3.0	1.4	---	---
Distillation Loss	%	ASTM D86	3.0	0.8	---	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	31.7	---	---
Cetane Index		ASTM D4737	<40.0	41.9	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0	---	---
Sodium	ppm	ASTM D5185m	<0.1	0	---	---
Potassium	ppm	ASTM D5185m	<0.1	0	---	---
Water	%	ASTM D6304	<0.05	0.003	---	---
ppm Water	ppm	ASTM D6304	<500	31	---	---
% Gasoline	%	*In-House	<0.50	0.0	---	---
% Biodiesel	%	*In-House	<20.0	0.0	---	---



FUEL REPORT

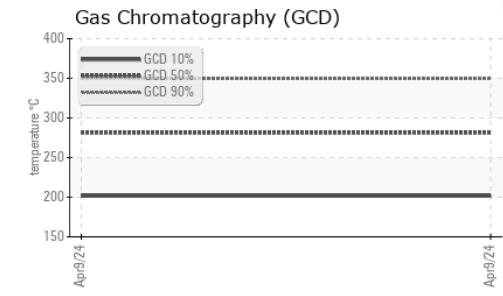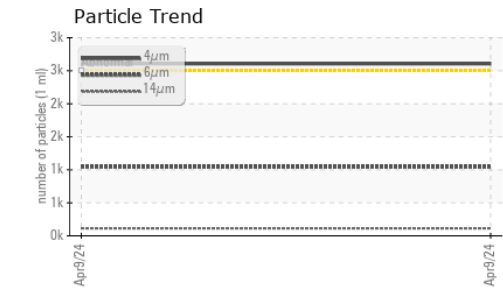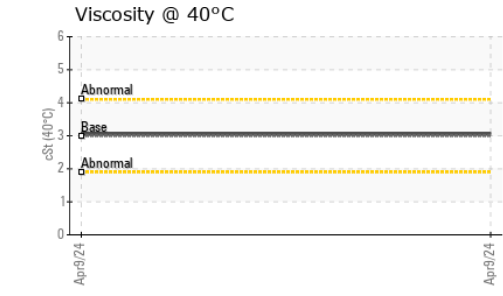
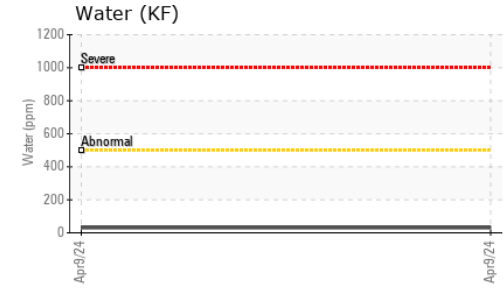
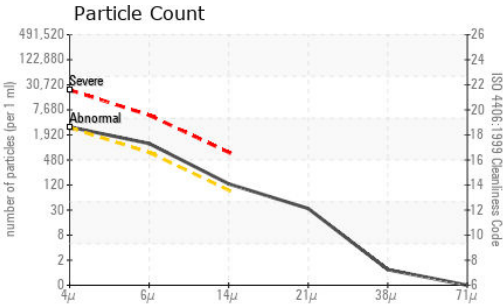


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	2606	---	---
Particles >6µm	ASTM D7647	>640	1044	---	---
Particles >14µm	ASTM D7647	>80	113	---	---
Particles >21µm	ASTM D7647	>20	29	---	---
Particles >38µm	ASTM D7647	>4	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	19/17/14	---	---

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	0	---	---
Nickel	ppm	ASTM D5185m <0.1	0	---	---
Lead	ppm	ASTM D5185m <0.1	0	---	---
Vanadium	ppm	ASTM D5185m <0.1	0	---	---
Iron	ppm	ASTM D5185m <0.1	0	---	---
Calcium	ppm	ASTM D5185m <0.1	0	---	---
Magnesium	ppm	ASTM D5185m <0.1	0	---	---
Phosphorus	ppm	ASTM D5185m <0.1	0	---	---
Zinc	ppm	ASTM D5185m <0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

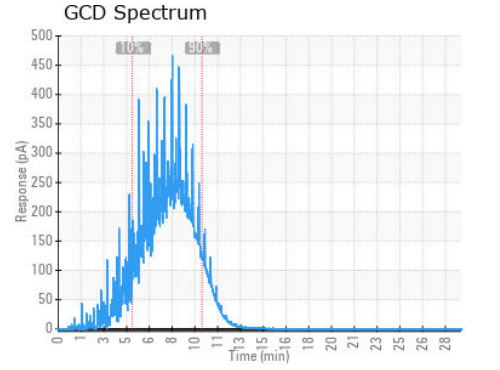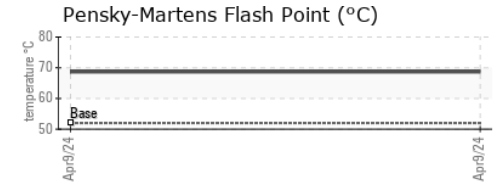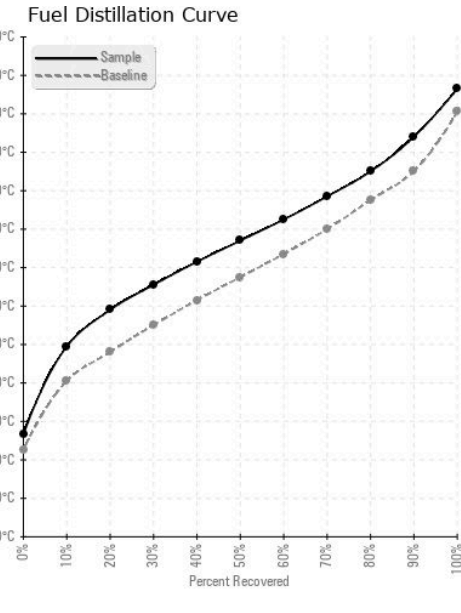

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JCBDF04593
Lab Number : **06147879**
Unique Number : 10977957
Test Package : DF-2 (Additional Tests: Fuel, Screen)
Received : 12 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 22 Apr 2024 - Doug Bogart

WEAVER JCB
 14295 JACKSON RD
 MISHAWAKA, IN
 US 46544
 Contact: KOLEY GEE
 koley.gee@weaveragandlawn.com
 T: (574)360-0625
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)