




OIL ANALYSIS REPORT

Sample Rating Trend

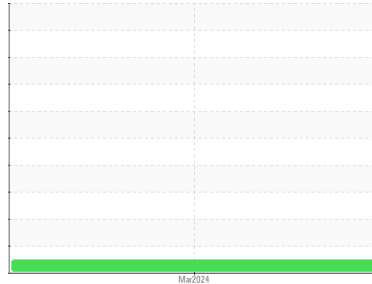

NORMAL



Area
[22618]
 Machine Id
40-231
 Component
Diesel Engine
 Fluid
KOMATSU 15W40 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor. (Customer Sample Comment: Komatsu 15w/40 motor oil)

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0836215	---	---
Sample Date	Client Info		28 Mar 2024	---	---
Machine Age	hrs Client Info		724	---	---
Oil Age	hrs Client Info		274	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>100	12	---	---
Chromium	ppm ASTM D5185m	>20	1	---	---
Nickel	ppm ASTM D5185m	>4	<1	---	---
Titanium	ppm ASTM D5185m		<1	---	---
Silver	ppm ASTM D5185m	>3	0	---	---
Aluminum	ppm ASTM D5185m	>20	2	---	---
Lead	ppm ASTM D5185m	>40	2	---	---
Copper	ppm ASTM D5185m	>330	9	---	---
Tin	ppm ASTM D5185m	>15	1	---	---
Vanadium	ppm ASTM D5185m		<1	---	---
Cadmium	ppm ASTM D5185m		<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		87	---	---
Barium	ppm ASTM D5185m		0	---	---
Molybdenum	ppm ASTM D5185m		62	---	---
Manganese	ppm ASTM D5185m		<1	---	---
Magnesium	ppm ASTM D5185m		407	---	---
Calcium	ppm ASTM D5185m		1898	---	---
Phosphorus	ppm ASTM D5185m		1018	---	---
Zinc	ppm ASTM D5185m		1187	---	---
Sulfur	ppm ASTM D5185m		3590	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	5	---	---
Sodium	ppm ASTM D5185m		4	---	---
Potassium	ppm ASTM D5185m	>20	2	---	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm *ASTM D7624	>20	7.1	---	---
Sulfation	Abs/.1mm *ASTM D7415	>30	20.3	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	16.5	---	---
Base Number (BN)	mg KOH/g ASTM D2896		8.4	---	---







OIL ANALYSIS REPORT

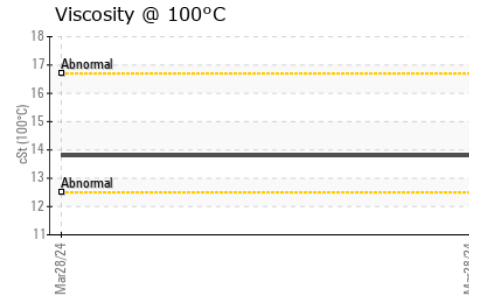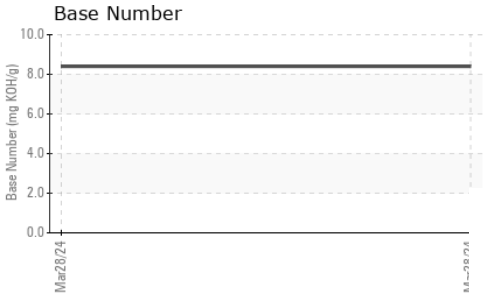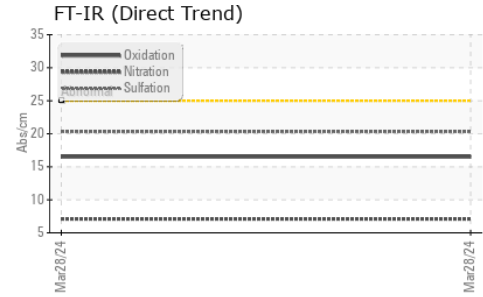

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.8	---	---

GRAPHS

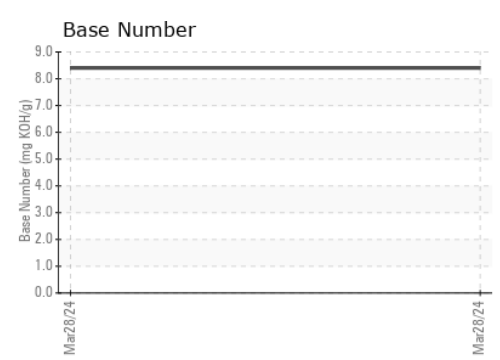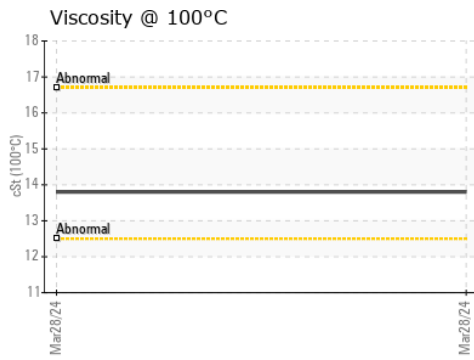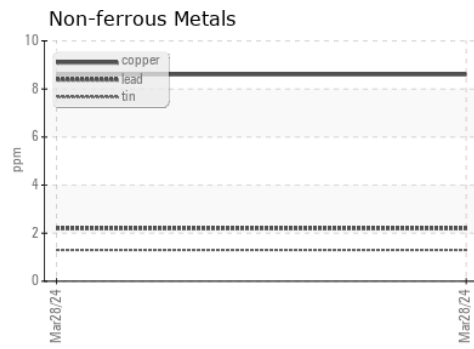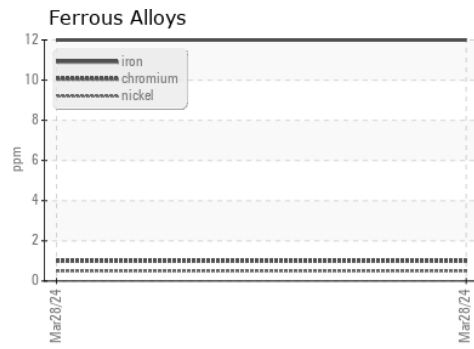

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0836215 **Received** : 12 Apr 2024
Lab Number : 06147969 **Tested** : 15 Apr 2024
Unique Number : 10978047 **Diagnosed** : 16 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)