




OIL ANALYSIS REPORT

Sample Rating Trend

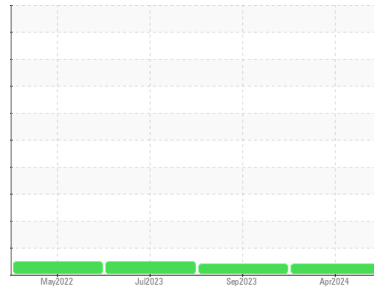

VISCOSITY



Machine Id

CR5504

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0922191	WC0833392	WC0810471
Sample Date	Client Info			10 Apr 2024	14 Sep 2023	10 Jul 2023
Machine Age	hrs	Client Info		7813	6700	6259
Oil Age	hrs	Client Info		1113	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	0.8	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	3	0	3
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	<1	0
Lead	ppm	ASTM D5185m	>40	2	<1	0
Copper	ppm	ASTM D5185m	>330	1	<1	0
Tin	ppm	ASTM D5185m	>15	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	35	40	131
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	22	42	56
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	450	115	708	507
Calcium	ppm	ASTM D5185m	3000	2306	1163	1774
Phosphorus	ppm	ASTM D5185m	1150	892	742	949
Zinc	ppm	ASTM D5185m	1350	1010	874	1206
Sulfur	ppm	ASTM D5185m	4250	3838	2408	4516




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	5	4
Sodium	ppm	ASTM D5185m	>158	2	2	0
Potassium	ppm	ASTM D5185m	>20	2	<1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.4	7.7	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.7	18.6	17.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.7	16.1	12.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.1	8.0	6.9







OIL ANALYSIS REPORT

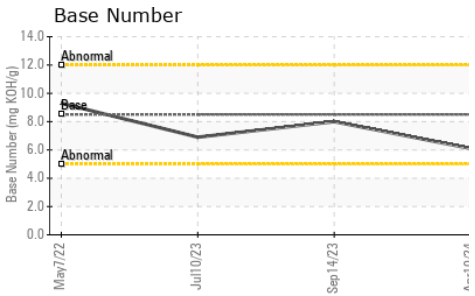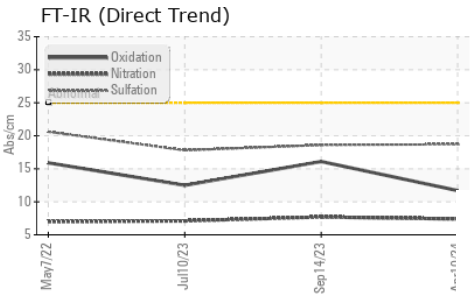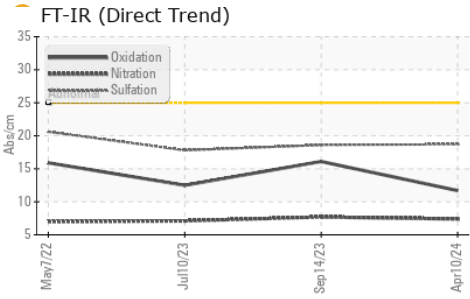

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	11.4	11.4	13.2

GRAPHS

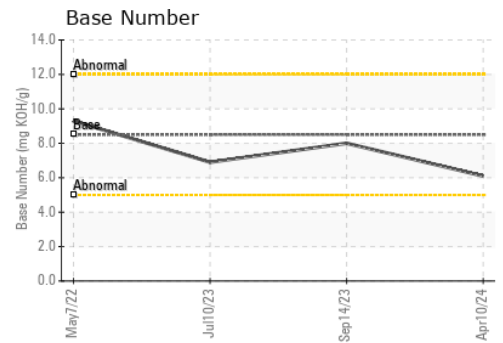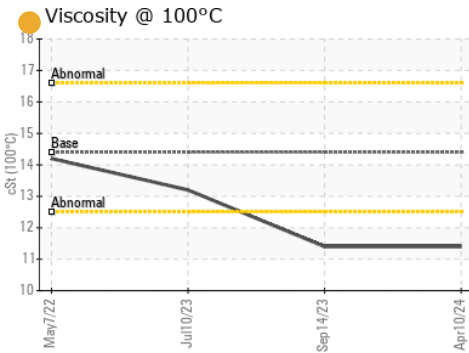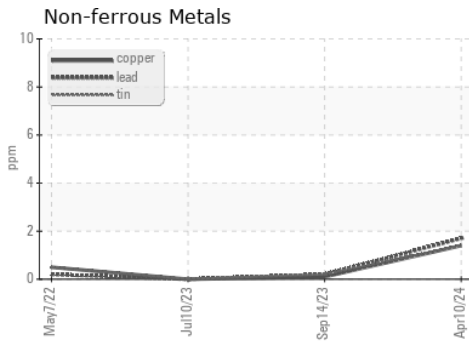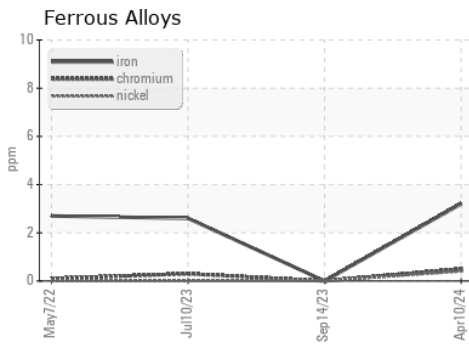

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0922191 **Received** : 12 Apr 2024
Lab Number : 06147975 **Tested** : 15 Apr 2024
Unique Number : 10978053 **Diagnosed** : 16 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

BUCKNER - WILLIS
 18123 HWY 75 NORTH
 WILLIS, TX
 US 77378

Contact: JOHN HAWKINS
johnh@bucknercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: