




OIL ANALYSIS REPORT

Sample Rating Trend

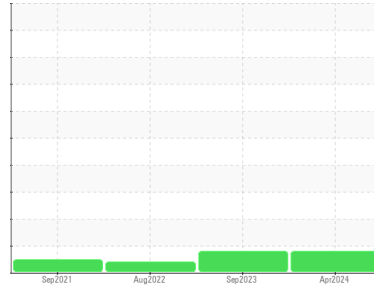

WEAR



Machine Id

40-210L

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0750278	WC0750316	WC0733283
Sample Date	Client Info		02 Apr 2024	05 Sep 2023	25 Aug 2022
Machine Age	hrs	Client Info	2771	2521	1794
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Not Changd
Sample Status			ABNORMAL	ABNORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	0.5
Water	WC Method	>0.21	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >51	▲ 52	▲ 75	7
Chromium	ppm	ASTM D5185m >11	<1	2	<1
Nickel	ppm	ASTM D5185m >5	3	4	0
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >31	3	3	2
Lead	ppm	ASTM D5185m >26	1	<1	<1
Copper	ppm	ASTM D5185m >26	3	4	5
Tin	ppm	ASTM D5185m >4	<1	1	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	21	157	<1
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	50	244	1
Manganese	ppm	ASTM D5185m	<1	1	<1
Magnesium	ppm	ASTM D5185m 450	175	790	13
Calcium	ppm	ASTM D5185m 3000	2308	1412	1031
Phosphorus	ppm	ASTM D5185m 1150	893	813	730
Zinc	ppm	ASTM D5185m 1350	1027	1026	437
Sulfur	ppm	ASTM D5185m 4250	3877	2831	1116

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >22	6	11	2
Sodium	ppm	ASTM D5185m >158	6	2	0
Potassium	ppm	ASTM D5185m >20	2	<1	2

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.5	0
Nitration	Abs/cm	*ASTM D7624 >20	7.1	9.3	3.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.7	22.9	15.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	11.0	17.5	5.1
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.0	8.9	4.8







OIL ANALYSIS REPORT

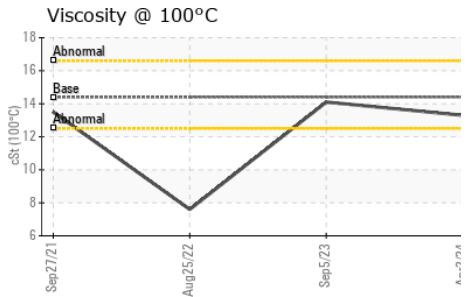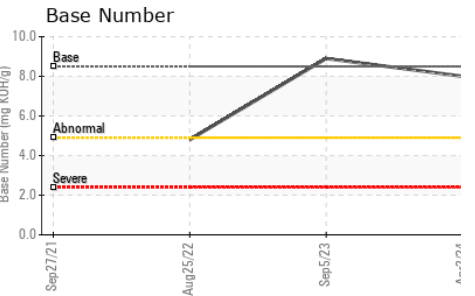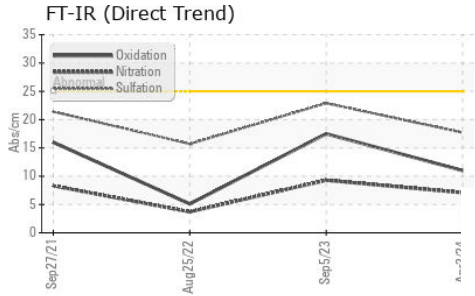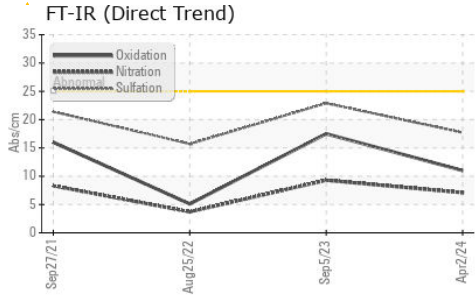

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	14.1

GRAPHS

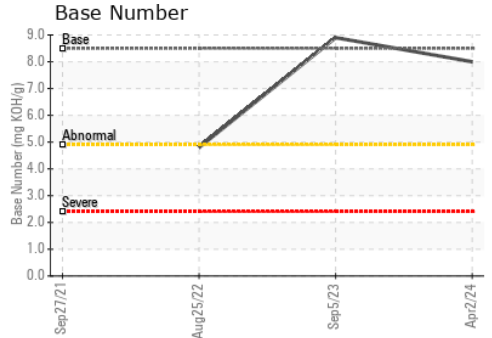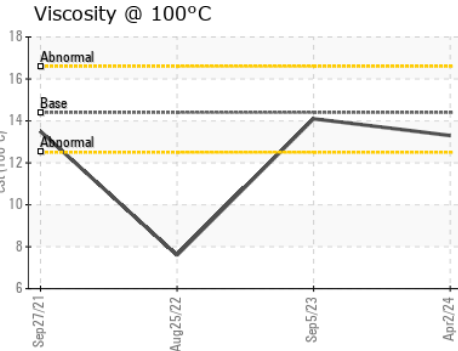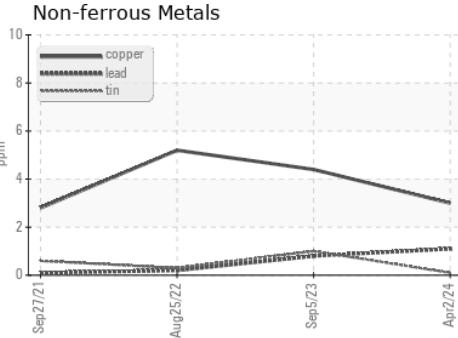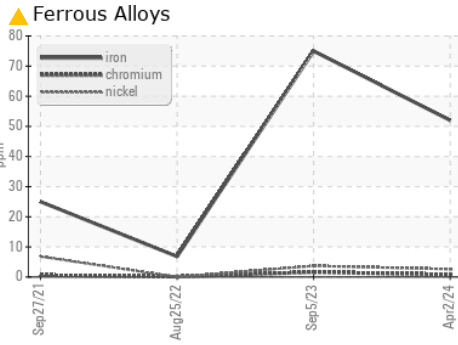

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0750278 **Received** : 12 Apr 2024
Lab Number : 06148024 **Tested** : 15 Apr 2024
Unique Number : 10978102 **Diagnosed** : 16 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)