




# OIL ANALYSIS REPORT

Sample Rating Trend

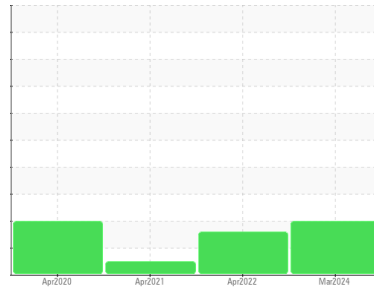

ISO



Machine Id

**6586575 (S/N 1017)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KC110212</b>	KC78491	KC86226
Sample Date	Client Info		<b>22 Mar 2024</b>	02 Apr 2022	17 Apr 2021
Machine Age	hrs	Client Info	<b>12996</b>	6603	4831
Oil Age	hrs	Client Info	<b>1627</b>	2269	799
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	<1	0
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	2
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	1	0
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >50	<b>8</b>	5	6
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 90	<b>3</b>	3	<1
Calcium	ppm	ASTM D5185m 2	<b>4</b>	0	0
Phosphorus	ppm	ASTM D5185m	<b>2</b>	17	<1
Zinc	ppm	ASTM D5185m	<b>9</b>	<1	0

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185m	<b>1</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0
Water	%	ASTM D6304 >0.05	<b>0.006</b>	0.005	0.009
ppm Water	ppm	ASTM D6304 >500	<b>68</b>	53.0	93.6






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>6027</b>	24594	2917
Particles >6µm	ASTM D7647	>1300	<b>▲ 1844</b>	▲ 8908	786
Particles >14µm	ASTM D7647	>80	<b>▲ 200</b>	▲ 1034	46
Particles >21µm	ASTM D7647	>20	<b>▲ 79</b>	▲ 236	11
Particles >38µm	ASTM D7647	>4	<b>▲ 8</b>	▲ 18	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>▲ 20/18/15</b>	▲ 20/17	17/13

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.41</b>	0.37	0.368

# OIL ANALYSIS REPORT

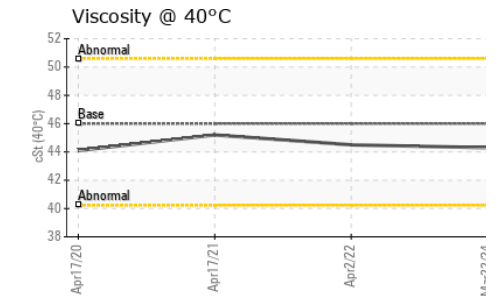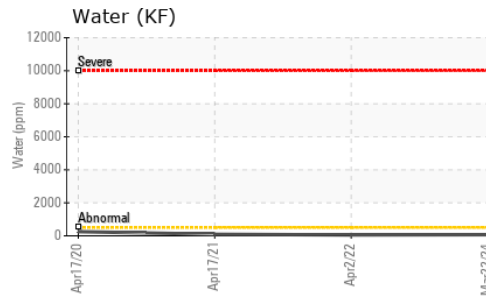
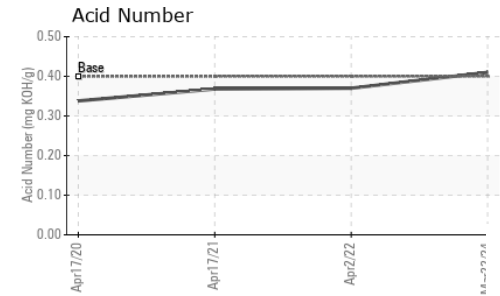
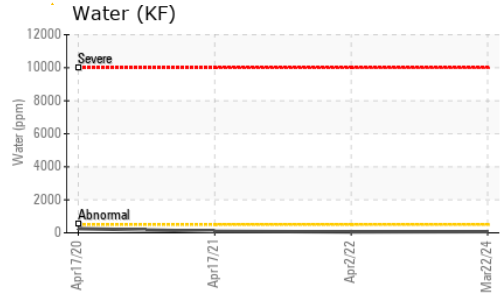
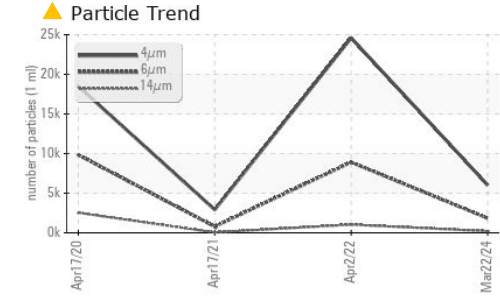


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.3	44.5	45.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

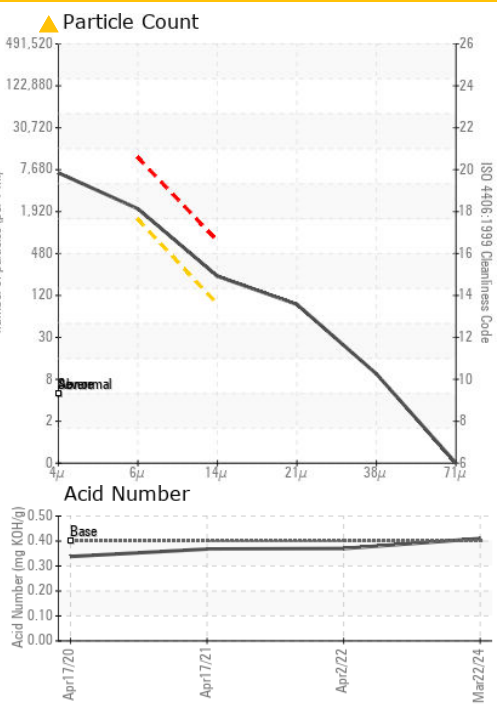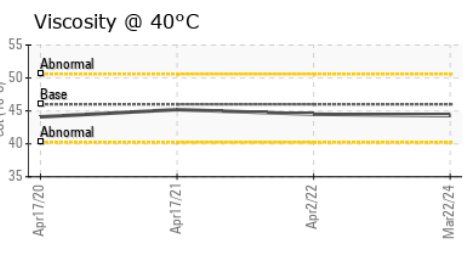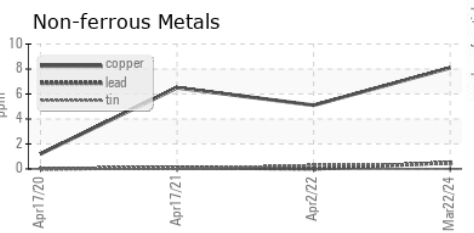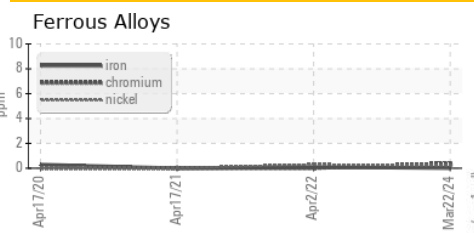

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC110212  
**Lab Number** : 06148078  
**Unique Number** : 10978156  
**Test Package** : IND 2  
**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Jonathan Hester

**REX LUMBER**  
 5299 ALABAMA ST  
 GRACEVILLE, FL  
 US 32440  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)