


# **OIL ANALYSIS REPORT**

Sample Rating Trend

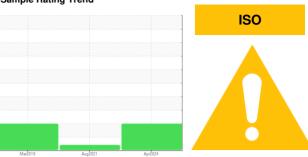

Machine Id

# KAESER SM 10 5122480 (S/N 1602)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

### **DIAGNOSIS**

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		IVIā	r2019	Aug2021 Apr202		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016906	KCP41630	KCP16885
Sample Date		Client Info		08 Apr 2024	11 Aug 2021	22 Mar 2019
Machine Age	hrs	Client Info		32604	25786	15442
Oil Age	hrs	Client Info		3803	4189	11577
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	7	5	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		4	2	1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm		>50	2	4	11
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	0	2
Calcium	ppm	ASTM D5185m		3	0	0
Phosphorus	ppm	ASTM D5185m	500	279	254	37
Zinc	ppm	ASTM D5185m		171	254	42
Sulfur	ppm	ASTM D5185m		2078	1223	3203
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm		>20	1	0	<1
Water	%	ASTM D6304		0.005	0.003	0.002
ppm Water	ppm	ASTM D6304	>500	55	36.8	20
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		12520		86350
Particles >6µm		ASTM D7647	>1300	<u>4449</u>		<b>△</b> 39080
Particles >14µm		ASTM D7647	>80	<b>476</b>		<u>▲</u> 1852
Particles >21µm		ASTM D7647	>20	<u> </u>		<u>▲</u> 523
Particles >38µm		ASTM D7647	>4	<u>^</u> 7		<b>4</b> 9
Particles >71µm		ASTM D7647	>3	0		3
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>21/19/16</u>		<u>^</u> 22/18
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2



# **OIL ANALYSIS REPORT**

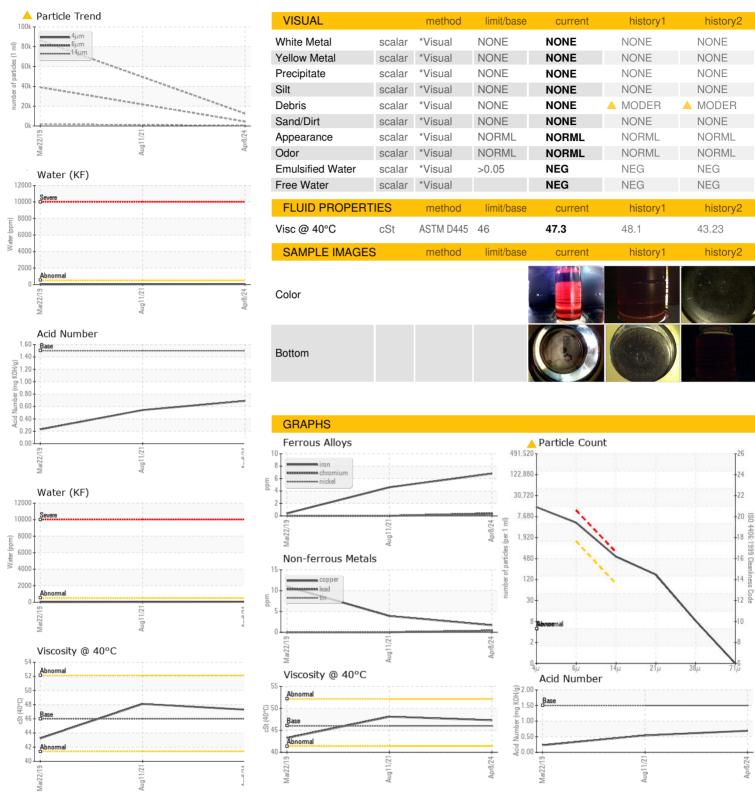





Lab Number

Laboratory Sample No.

: KCPA016906 : 06148100

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** Unique Number: 10978178

: 12 Apr 2024 : 15 Apr 2024 Diagnosed

: 17 Apr 2024 - Jonathan Hester

Contact: Service Manager

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - ALASANTEX

**ALAMO BEER COMPANY** 

415 BURNET ST

US 78202

T:

F:

SAN ANTONIO, TX