




# OIL ANALYSIS REPORT

Sample Rating Trend

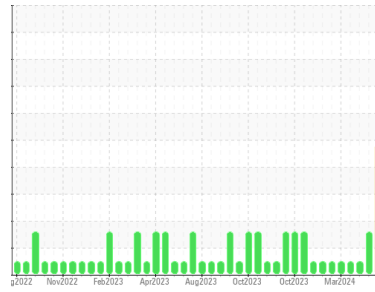

**DIRT**



Machine Id  
**4EK05286**

Component  
**Biogas Engine**

Fluid  
**MAHLER Q8 Mahler G8 SAE 40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

Elemental level of silicon (Si) above normal.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0880270</b>	WC0880272	WC0880274
Sample Date	Client Info		<b>11 Apr 2024</b>	05 Apr 2024	26 Mar 2024
Machine Age	hrs	Client Info	<b>82615</b>	82471	82239
Oil Age	hrs	Client Info	<b>483</b>	339	107
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>SEVERE</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>45	<b>14</b>	12	15
Chromium	ppm	ASTM D5185m	>2	<b>2</b>	<1	1
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>3</b>	2	2
Lead	ppm	ASTM D5185m	>5	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m	>14	<b>7</b>	4	3
Tin	ppm	ASTM D5185m	>13	<b>4</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>1</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	<1	1
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>6</b>	6	6
Calcium	ppm	ASTM D5185m		<b>2443</b>	2522	2156
Phosphorus	ppm	ASTM D5185m		<b>419</b>	411	386
Zinc	ppm	ASTM D5185m		<b>458</b>	478	424
Sulfur	ppm	ASTM D5185m		<b>5747</b>	5355	3109

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>200	<b>▲ 318</b>	▲ 206	84
Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	2

## INFRA-RED






	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>4.7</b>	4.7	4.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.8</b>	21.3	16.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>10.2</b>	9.6	8.9
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>2.33</b>	1.83	0.98
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	<b>4.14</b>	4.84	6.43











# OIL ANALYSIS REPORT

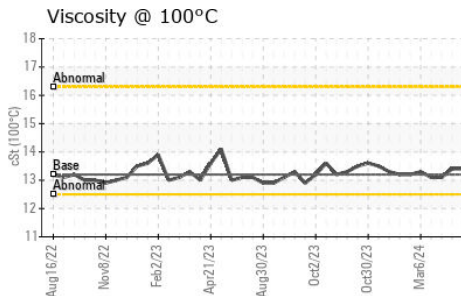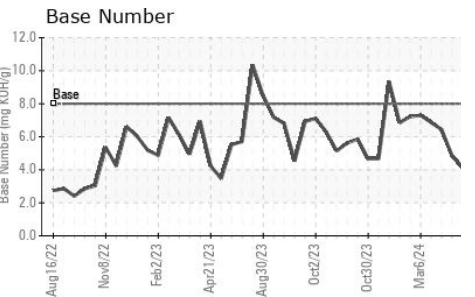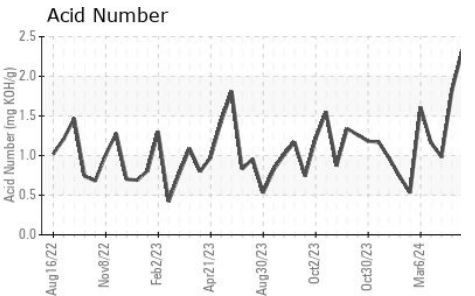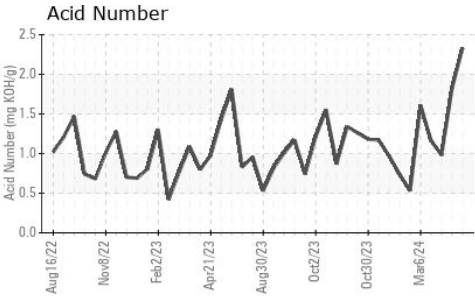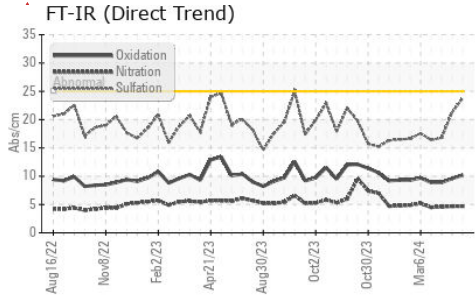

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.2	13.4	13.1

## GRAPHS

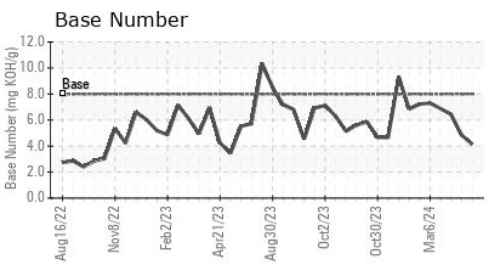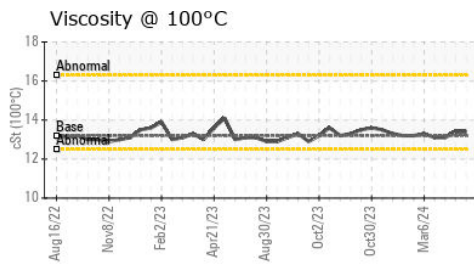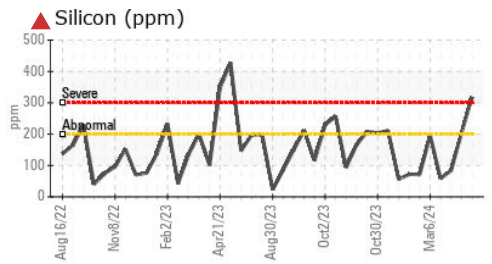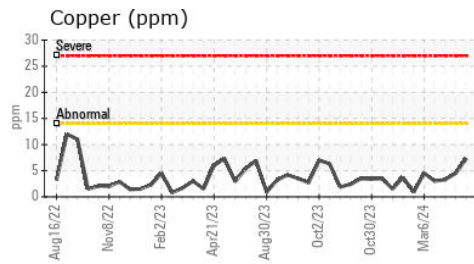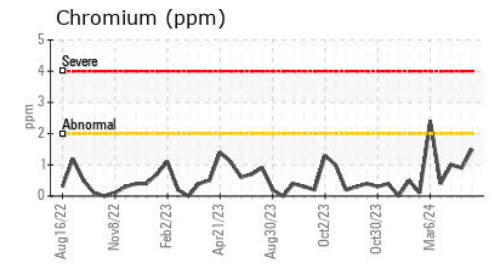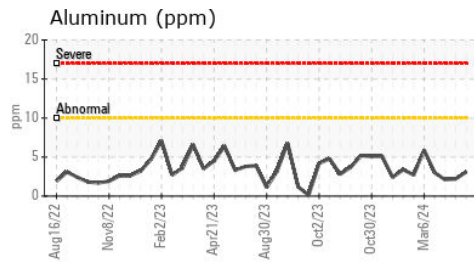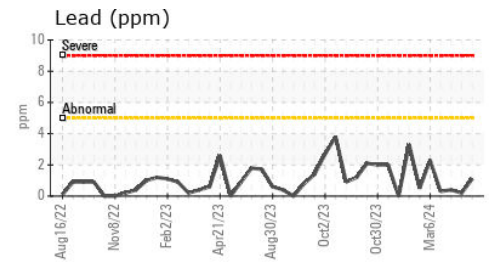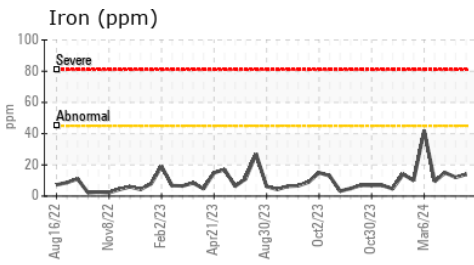

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0880270  
**Lab Number** : 06148146  
**Unique Number** : 10978224  
**Test Package** : MOB 2

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 16 Apr 2024 - Sean Felton

**BI-COUNTY**  
 3214 DOVER RD  
 WOODLAWN, TN  
 US 37191

Contact: KEVIN WEAVER  
 kevin.weaver@cubedistrictenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)