




# OIL ANALYSIS REPORT



Area  
**[22887]**  
 Machine Id  
**30-77**  
 Component  
**Right Final Drive**  
 Fluid  
**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

Sample Rating Trend

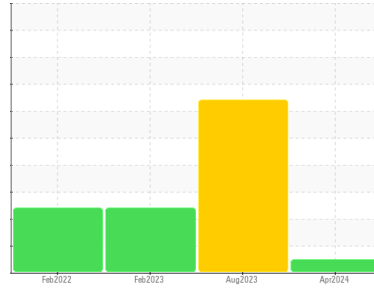

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0836140</b>	WC0802433	WC0754825
Sample Date	Client Info		<b>10 Apr 2024</b>	01 Aug 2023	20 Feb 2023
Machine Age	hrs	Client Info	<b>4653</b>	3625	3080
Oil Age	hrs	Client Info	<b>529</b>	545	1080
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	SEVERE	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.075	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >750	<b>361</b>	427	525
Chromium	ppm	ASTM D5185m >9	<b>3</b>	4	6
Nickel	ppm	ASTM D5185m >10	<b>1</b>	1	2
Titanium	ppm	ASTM D5185m	<b>1</b>	1	2
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>6</b>	13	47
Lead	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >40	<b>2</b>	<1	1
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m >5	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	<b>161</b>	54	161
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>3</b>	2	3
Manganese	ppm	ASTM D5185m	<b>4</b>	7	10
Magnesium	ppm	ASTM D5185m 350	<b>40</b>	8	12
Calcium	ppm	ASTM D5185m 1800	<b>3409</b>	65	158
Phosphorus	ppm	ASTM D5185m 1000	<b>1215</b>	307	946
Zinc	ppm	ASTM D5185m 1100	<b>1391</b>	29	112
Sulfur	ppm	ASTM D5185m 3500	<b>4635</b>	20101	18783

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>60</b>	89	200
Sodium	ppm	ASTM D5185m >51	<b>&lt;1</b>	5	7
Potassium	ppm	ASTM D5185m >20	<b>4</b>	6	18

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	MILKY	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.075	<b>NEG</b>	0.2%	NEG
Free Water	scalar	*Visual	<b>NEG</b>	---	---




# OIL ANALYSIS REPORT



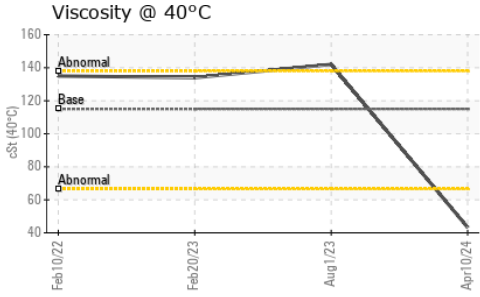


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	115	<b>43.3</b>	142	134

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

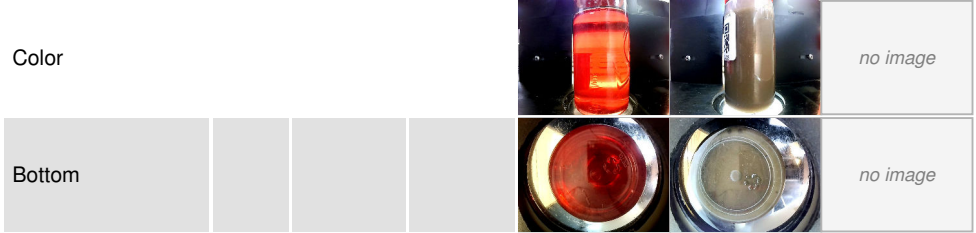

## GRAPHS

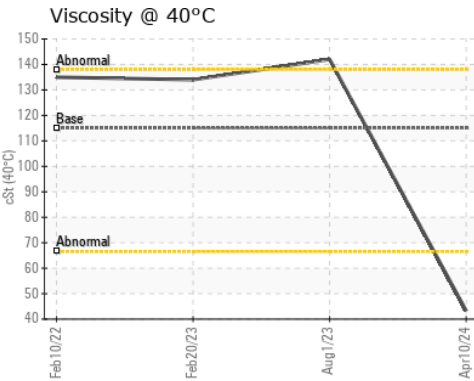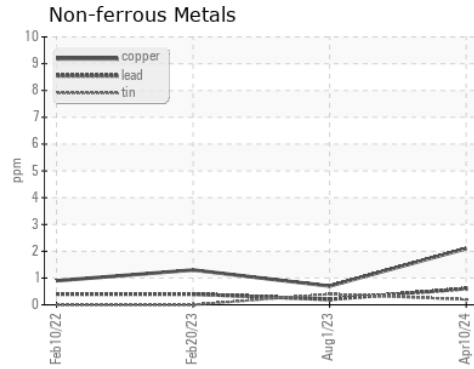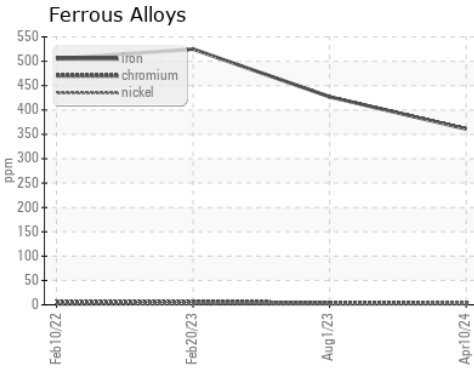

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0836140      **Received** : 12 Apr 2024  
**Lab Number** : **06148183**      **Tested** : 15 Apr 2024  
**Unique Number** : 10978261      **Diagnosed** : 16 Apr 2024 - Sean Felton  
**Test Package** : CONST

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com  
 T: (918)728-5749  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)