


OIL ANALYSIS REPORT

Sample Rating Trend



FUEL

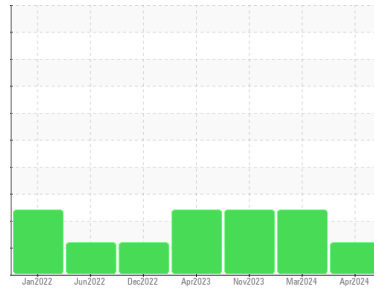

Machine Id

9910

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		HRE0000132	WC0887542	WC0860355
Sample Date	Client Info		10 Apr 2024	04 Mar 2024	06 Nov 2023
Machine Age	mls	Client Info	367765	366208	360781
Oil Age	mls	Client Info	1500	0	6000
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	8	21	7
Chromium	ppm	ASTM D5185m	>20	<1	2	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	2	3
Lead	ppm	ASTM D5185m	>40	<1	4	3
Copper	ppm	ASTM D5185m	>330	<1	2	<1
Tin	ppm	ASTM D5185m	>15	<1	1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	231	65	127
Barium	ppm	ASTM D5185m	10	<1	<1	0
Molybdenum	ppm	ASTM D5185m	100	73	77	69
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	450	328	288	283
Calcium	ppm	ASTM D5185m	3000	1300	1688	1306
Phosphorus	ppm	ASTM D5185m	1150	909	1024	824
Zinc	ppm	ASTM D5185m	1350	1034	1129	1022
Sulfur	ppm	ASTM D5185m	4250	2883	3101	2659

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	8	13	7
Sodium	ppm	ASTM D5185m	>158	3	5	4
Potassium	ppm	ASTM D5185m	>20	1	2	<1
Fuel	%	ASTM D3524	>5	▲ 5.8	▲ 10.7	▲ 14.3





INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.4	0.8	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.7	12.4	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	24.2	22.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	24.1	20.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	5.9	5.6





OIL ANALYSIS REPORT

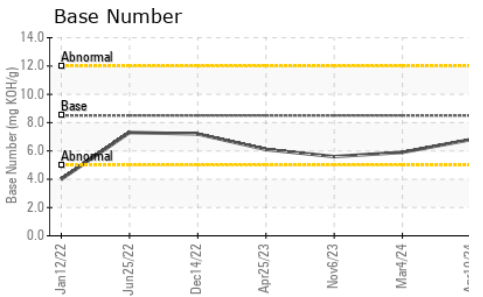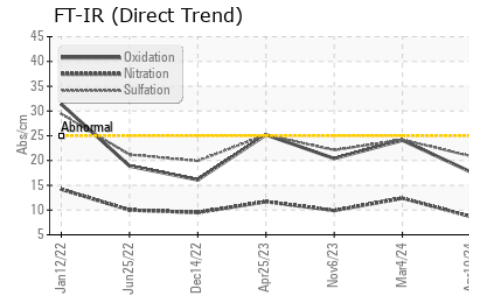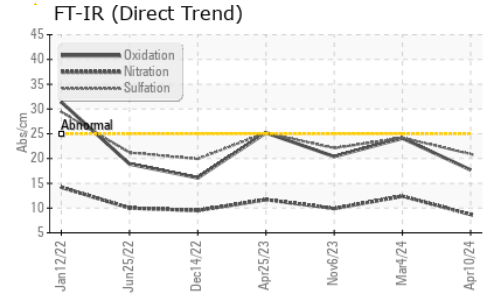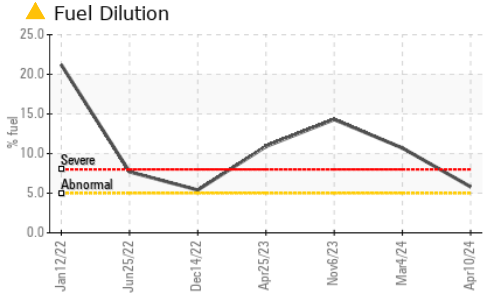

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 12.0	▲ 11.2	▲ 10.2

GRAPHS

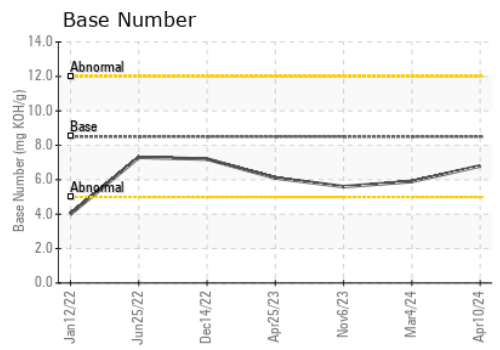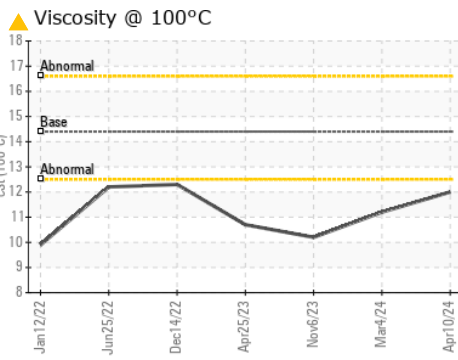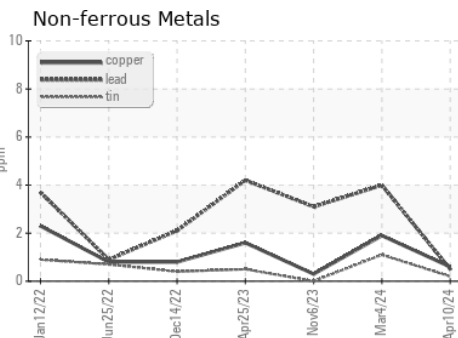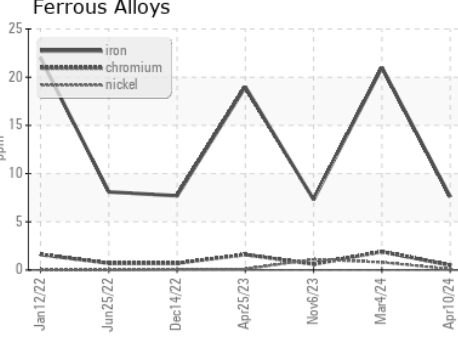

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HRE0000132 **Received** : 15 Apr 2024
Lab Number : 06148471 **Tested** : 18 Apr 2024
Unique Number : 10978549 **Diagnosed** : 18 Apr 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

TOWN OF CHAPEL HILL
 6900 MILLHOUSE RD
 CHAPEL HILL, NC
 US 27516
 Contact: Lisa DePasqua
 ldepasqua@townofchapelhill.org
 T: (919)696-4941
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)