


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

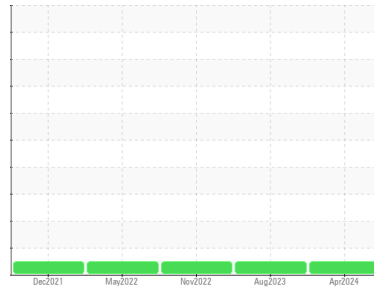

Machine Id

**1311**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HRE0000117</b>	WC0844956	WC0744278
Sample Date	Client Info			<b>04 Apr 2024</b>	02 Aug 2023	01 Nov 2022
Machine Age	mls	Client Info		<b>266978</b>	255762	239247
Oil Age	mls	Client Info		<b>0</b>	0	6000
Oil Changed	Client Info			<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>42</b>	48	46
Chromium	ppm	ASTM D5185m	>20	<b>4</b>	9	14
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	2
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	4
Lead	ppm	ASTM D5185m	>40	<b>7</b>	11	8
Copper	ppm	ASTM D5185m	>330	<b>7</b>	5	8
Tin	ppm	ASTM D5185m	>15	<b>1</b>	2	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>39</b>	12	23
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>74</b>	83	83
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	450	<b>402</b>	413	412
Calcium	ppm	ASTM D5185m	3000	<b>1673</b>	2264	1981
Phosphorus	ppm	ASTM D5185m	1150	<b>1038</b>	1236	1120
Zinc	ppm	ASTM D5185m	1350	<b>1179</b>	1588	1371
Sulfur	ppm	ASTM D5185m	4250	<b>3068</b>	4232	4176

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	8	7
Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	10
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>2</b>	1.6	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>14.0</b>	13.6	14.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>28.7</b>	27.1	27.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>26.8</b>	23.4	25
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.0</b>	7.3	8





# OIL ANALYSIS REPORT

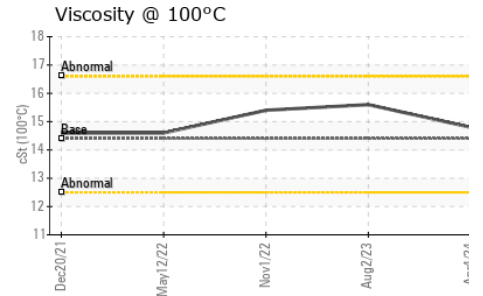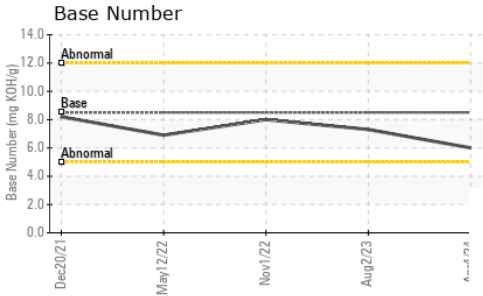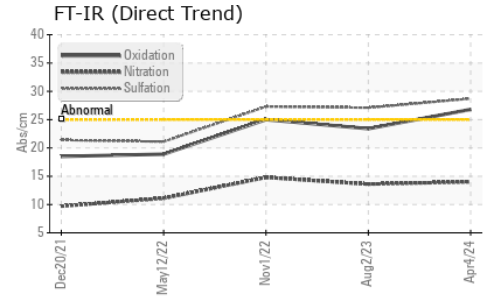

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.8</b>	15.6	15.4

**GRAPHS**

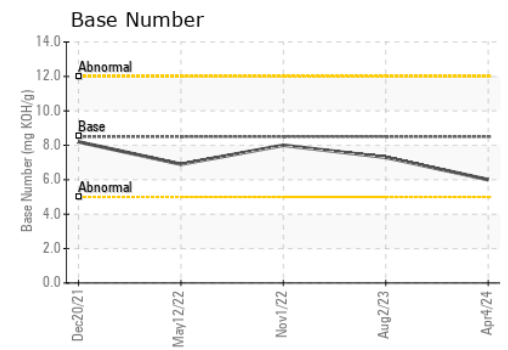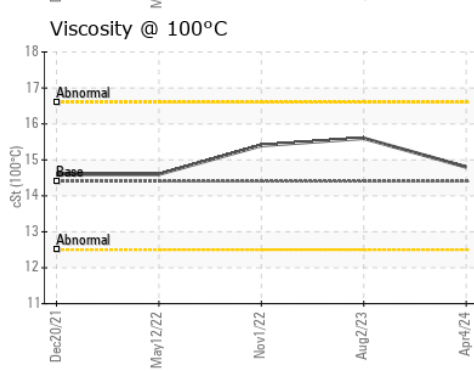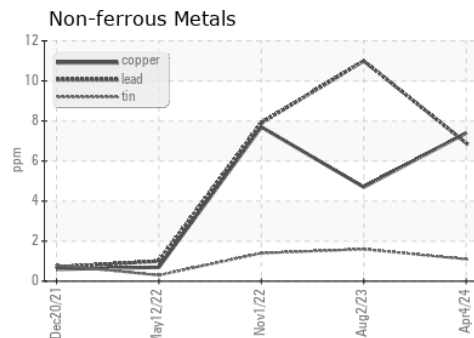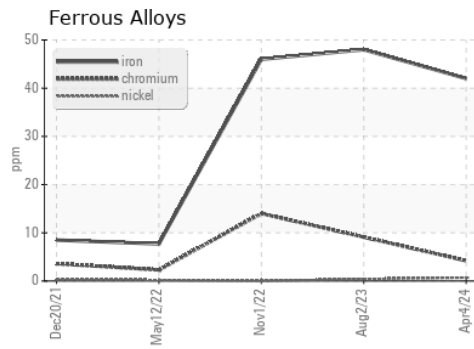

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000117  
**Lab Number** : **06148474**  
**Unique Number** : 10978552  
**Test Package** : FLEET

**Received** : 15 Apr 2024  
**Tested** : 16 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Jonathan Hester

**TOWN OF CHAPEL HILL**  
 6900 MILLHOUSE RD  
 CHAPEL HILL, NC  
 US 27516  
 Contact: Lisa DePasqua  
 ldepasqua@townofchapelhill.org  
 T: (919)696-4941  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)