




OIL ANALYSIS REPORT

Sample Rating Trend

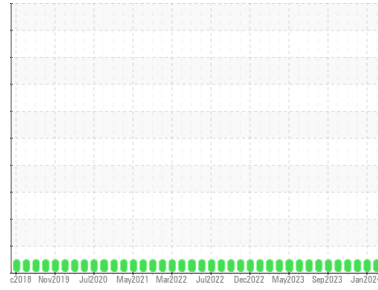

NORMAL



Machine Id
JLG 1255 016-0118 (S/N 0160086959)
 Component
Diesel Engine
 Fluid
SCHAEFFER SUPREME 7000 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0903958	WC0868353	WC0868382
Sample Date	Client Info			12 Mar 2024	25 Jan 2024	16 Nov 2023
Machine Age	hrs	Client Info		12568	12325	12098
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	8	7	<1
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	4	2
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	0	0
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		92	84	81
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m	50	79	73	72
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	1000	12	17	14
Calcium	ppm	ASTM D5185m	1400	2288	2123	2116
Phosphorus	ppm	ASTM D5185m	985	1112	1064	1036
Zinc	ppm	ASTM D5185m	1060	1209	1261	1260
Sulfur	ppm	ASTM D5185m	4000	5375	5233	4904

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	6	4
Sodium	ppm	ASTM D5185m		3	2	3
Potassium	ppm	ASTM D5185m	>20	2	<1	0


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.2	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	18.0	17.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	14.4	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	10	6.3	6.4	6.3




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

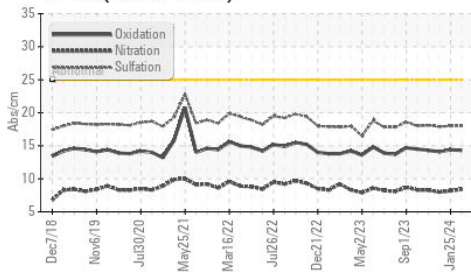

Base Number

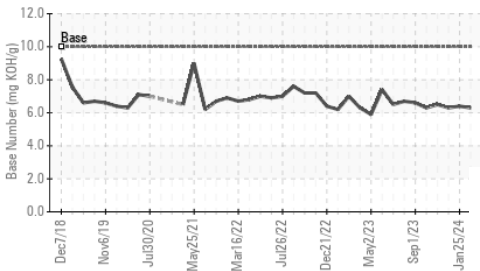

Viscosity @ 100°C

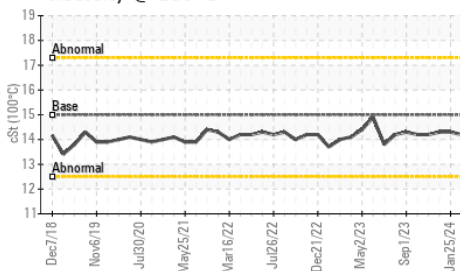


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15	14.2	14.3

GRAPHS


Ferrous Alloys

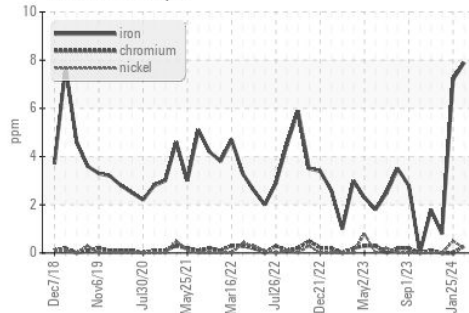


Non-ferrous Metals

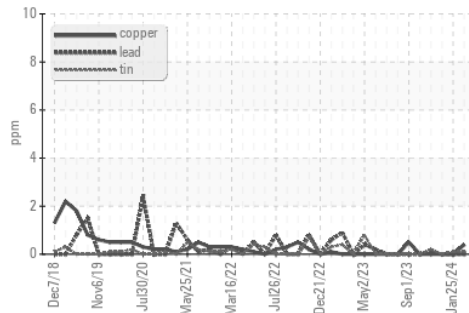

Viscosity @ 100°C

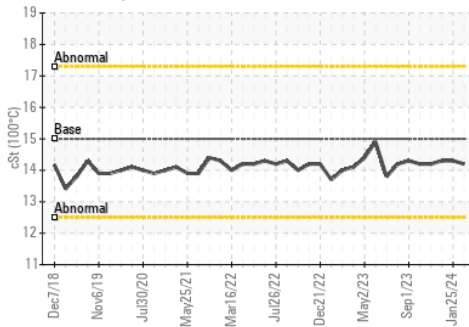

Base Number

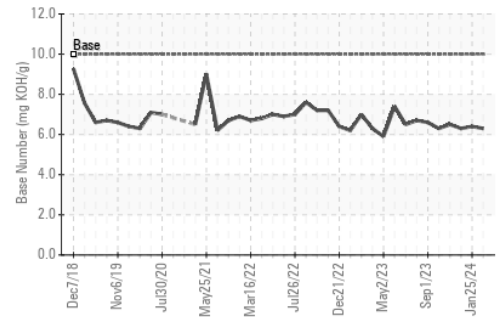

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0903958 **Received** : 15 Apr 2024
Lab Number : **06148510** **Tested** : 16 Apr 2024
Unique Number : 10978588 **Diagnosed** : 16 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: