

OIL ANALYSIS REPORT



Machine Id
JOHN DEERE 644 P 1DW644PAVNLZ13993
Component
Front Differential
Fluid
MOBIL MOBILFLUID 424 (--- GAL)

Sample Rating Trend



WEAR



DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Bearing and/or bushing wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0172465	---	---
Sample Date	Client Info		04 Apr 2024	---	---
Machine Age	hrs	Client Info	2798	---	---
Oil Age	hrs	Client Info	500	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		14	---	---
Iron	ppm	ASTM D5185m >500	13	---	---
Chromium	ppm	ASTM D5185m >10	0	---	---
Nickel	ppm	ASTM D5185m >10	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >25	0	---	---
Lead	ppm	ASTM D5185m >25	▲ 26	---	---
Copper	ppm	ASTM D5185m >100	▲ 108	---	---
Tin	ppm	ASTM D5185m >10	8	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	92	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	<1	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m	63	---	---
Calcium	ppm	ASTM D5185m	3339	---	---
Phosphorus	ppm	ASTM D5185m	1141	---	---
Zinc	ppm	ASTM D5185m	1374	---	---
Sulfur	ppm	ASTM D5185m	7486	---	---




CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	6	---	---
Sodium	ppm	ASTM D5185m	<1	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

OIL ANALYSIS REPORT

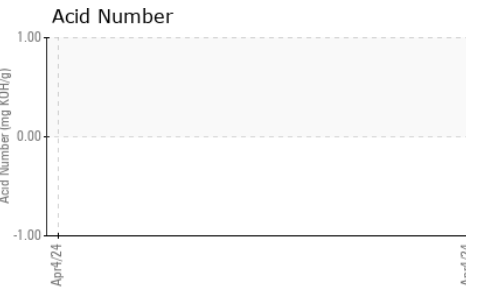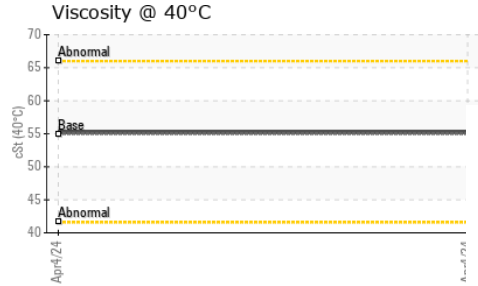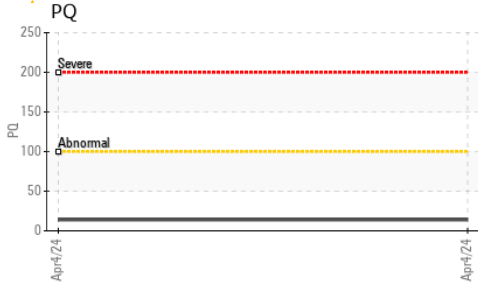





FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	55	55.2	---	---
-------------	-----	-----------	----	-------------	-----	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

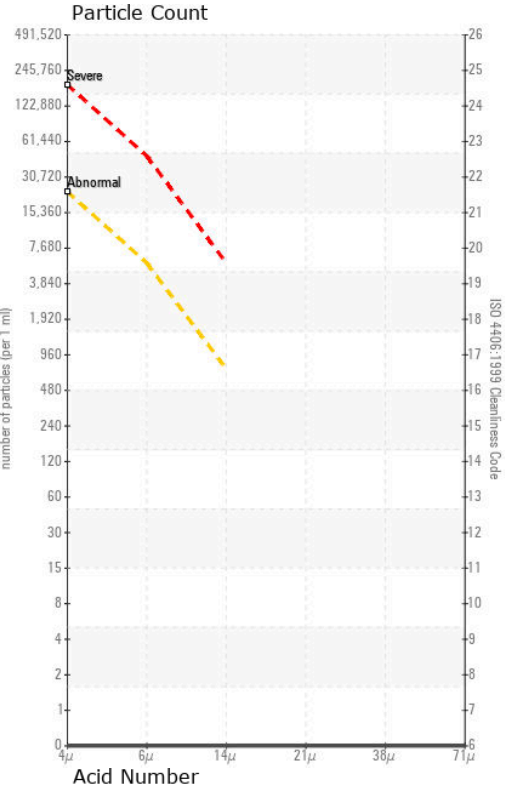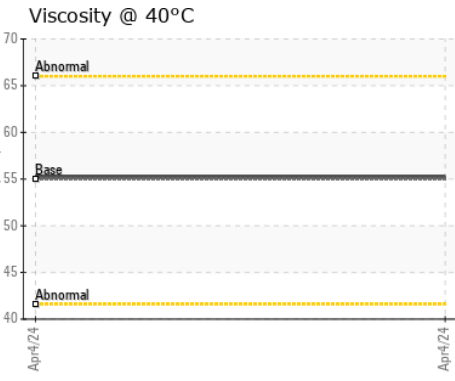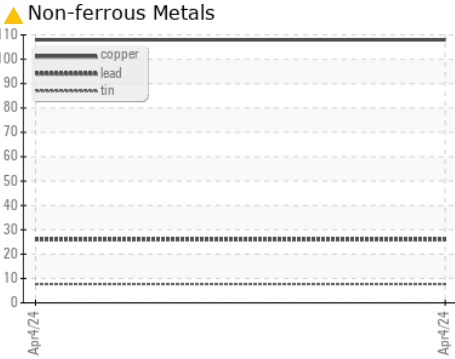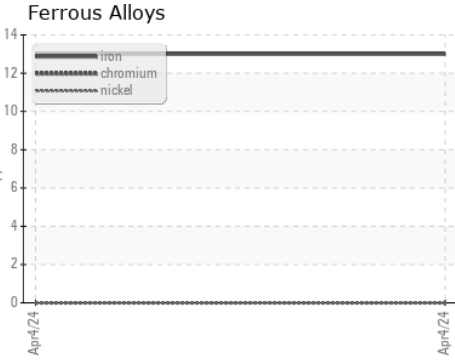

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0172465 **Received** : 15 Apr 2024
Lab Number : **06148556** **Tested** : 16 Apr 2024
Unique Number : 10978634 **Diagnosed** : 17 Apr 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SCOTTS EARTH GROW
 7601 GENERAL MAHONE HWY
 WAVERLY, VA
 US 23890
 Contact: JW
 jerald.tappiii@scotts.com
 T: (804)834-3986
 F: (804)834-3989