

## **OIL ANALYSIS REPORT**

### Area LCAC-81 LCAC-81 LUBE OIL TANK STARBO

**Forward Lube System** 

Fluic MILITARY MIL-L-23699D (--- GAL)

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy for diagnostic comment updates. Please note that this is a corrected copy for diagnostic comment updates.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. Discrete particle counts [100 ml] 5-15µm = 120700, 15-25µm = 9700, 25-50µm = 2900, 50-100µm = 0, >100µm = 0. Class 8

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0865214		
Sample Date		Client Info		05 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		Not Changd		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		1800		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		7		
		ASTIM DS105III		-		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3481		
Particles >6µm		ASTM D7647	>1300	<b>1333</b>		
Particles >14µm		ASTM D7647	>160	126		
Particles >21µm		ASTM D7647		29		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<mark>  </mark> 19/18/14		
FLUID DEGRADA	ATI <u>ON</u>	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	0.37		
		. 10 1 11 200-10	5.0	0.07		


### Report Id: WALNAT [WUSCAR] 06148616 (Generated: 04/24/2024 18:17:17) Rev: 3

Sample Rating Trend


ISO




# **OIL ANALYSIS REPORT**





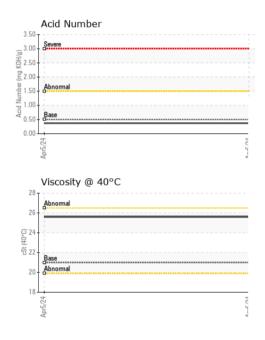

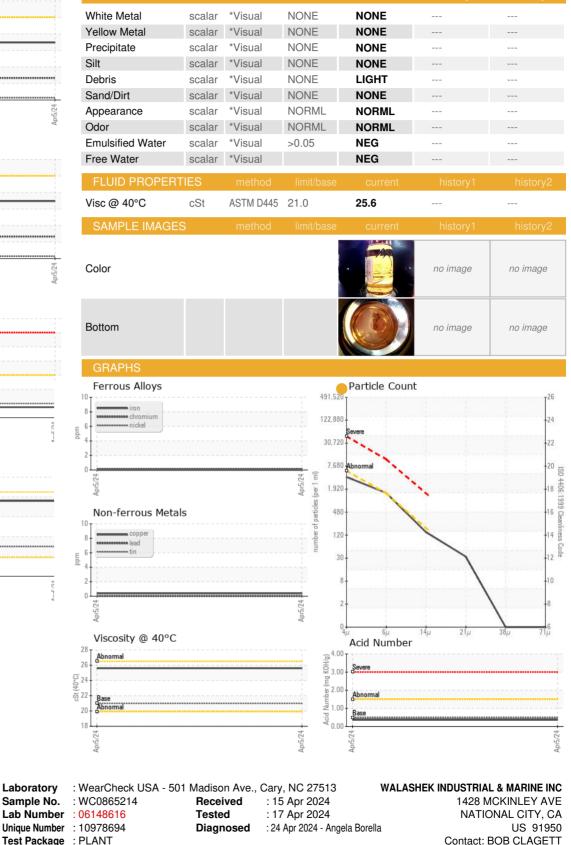

Test Package : PLANT

Laboratory

Sample No.

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: WALNAT [WUSCAR] 06148616 (Generated: 04/24/2024 18:17:17) Rev: 3

Certificate 12367

Submitted By: SHAWN LAHEY Page 2 of 2

bobclagett@walashek.com

T:

F: