

# **OIL ANALYSIS REPORT**

LCAC-81 **Icac-81 SCAV FAN PORT AFT** 

**Aft Hydraulic System** 

MILITARY MIL-L-23699D (--- GAL)

# Sample Rating Trend ISO

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy for diagnostic comment updates to add NAS.

All component wear rates are normal.

## Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. Discrete particle counts [100 ml] 5-15 $\mu$ m = 120300, 15-25 $\mu$ m  $= 8400, 25-50 \mu m = 2400, 50-100 \mu m = 200, >100 \mu m$ = 0. Class 8


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION					
Sample Number		Client Info		WC0865253		
Sample Date		Client Info		05 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	OLIVE OF	history1	history
				current	HISTORY	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm		>20	<1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		2		
Phosphorus	ppm	ASTM D5185m		1629		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		0		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	IFSS	method	limit/base	current	history1	history2
Particles >4µm	00_	ASTM D7647	>5000	4467		
Particles >6µm		ASTM D7647	>1300	<u>4407</u> <u>1313</u>		
Particles >0µm		ASTM D7647	>160	110		
Particles >14μm		ASTM D7647		26		
Particles >38µm		ASTM D7647 ASTM D7647	>40	20		
Particles >30μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/18/14		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	0.39		



## **OIL ANALYSIS REPORT**

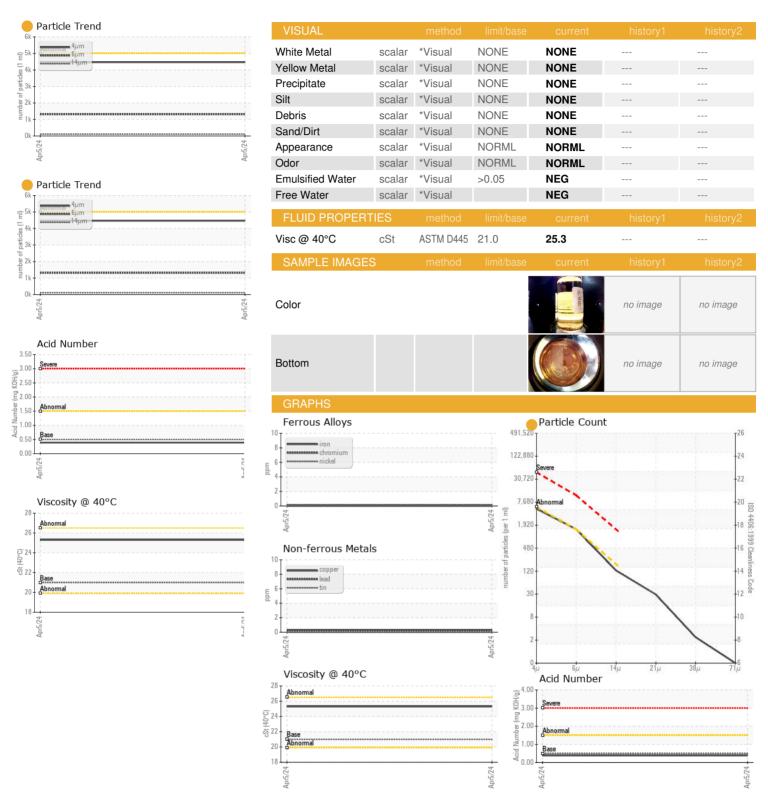





Certificate 12367

Laboratory Sample No.

: WC0865253 Lab Number : 06148619 Unique Number : 10978697 Test Package : PLANT

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** Diagnosed

: 15 Apr 2024 : 17 Apr 2024 : 24 Apr 2024 - Angela Borella

**WALASHEK INDUSTRIAL & MARINE INC** 1428 MCKINLEY AVE NATIONAL CITY, CA US 91950

Contact: BOB CLAGETT bobclagett@walashek.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: