



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

Area

LCAC-81

Machine Id

LCAC-81 PROP

Component

Port Lube System

Fluid

MILITARY MIL-L-23699D (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

The iron level is abnormal.

Contamination

Appearance is hazy. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0865231	---	---
Sample Date	Client Info	05 Apr 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	Not Changed	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	▲ 67	---	---
Chromium ppm	ASTM D5185m >20	1	---	---
Nickel ppm	ASTM D5185m >20	<1	---	---
Titanium ppm	ASTM D5185m	0	---	---
Silver ppm	ASTM D5185m	<1	---	---
Aluminum ppm	ASTM D5185m >20	15	---	---
Lead ppm	ASTM D5185m >20	0	---	---
Copper ppm	ASTM D5185m >20	<1	---	---
Tin ppm	ASTM D5185m >20	<1	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	0	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	0	---	---
Manganese ppm	ASTM D5185m	<1	---	---
Magnesium ppm	ASTM D5185m	4	---	---
Calcium ppm	ASTM D5185m	3	---	---
Phosphorus ppm	ASTM D5185m	1623	---	---
Zinc ppm	ASTM D5185m	0	---	---
Sulfur ppm	ASTM D5185m	19	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	2	---	---
Sodium ppm	ASTM D5185m	18	---	---
Potassium ppm	ASTM D5185m >20	1	---	---
Water %	ASTM D6304 >0.05	NEG	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.5	0.53	---	---


VISUAL

method	limit/base	current	history1	history2
White Metal scalar	*Visual NONE	NONE	---	---
Yellow Metal scalar	*Visual NONE	NONE	---	---
Precipitate scalar	*Visual NONE	NONE	---	---
Silt scalar	*Visual NONE	NONE	---	---
Debris scalar	*Visual NONE	▲ MODER	---	---
Sand/Dirt scalar	*Visual NONE	NONE	---	---
Appearance scalar	*Visual NORML	● HAZY	---	---
Odor scalar	*Visual NORML	NORML	---	---
Emulsified Water scalar	*Visual >0.05	NEG	---	---
Free Water scalar	*Visual	NEG	---	---




OIL ANALYSIS REPORT


▲ Ferrous Alloys

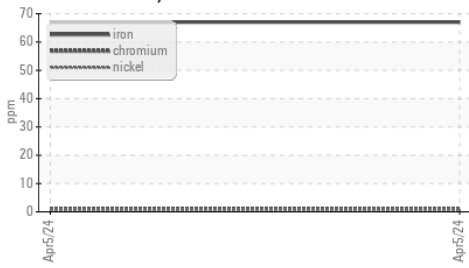

Acid Number

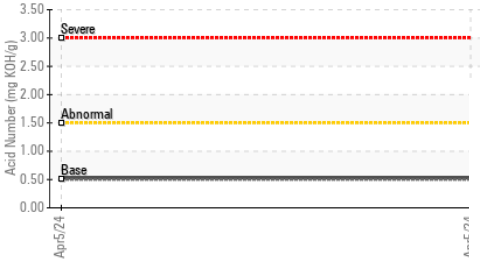

Viscosity @ 40°C

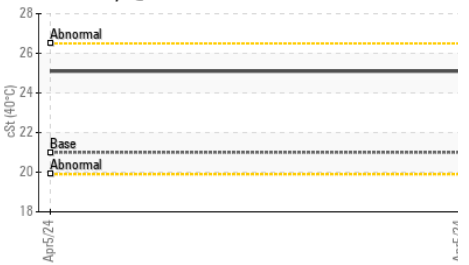

FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	21.0	25.1	---

SAMPLE IMAGES


method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS


▲ Ferrous Alloys




Non-ferrous Metals

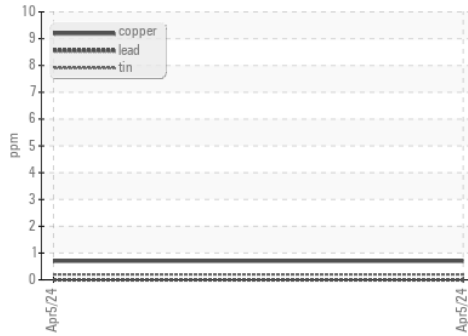

Viscosity @ 40°C

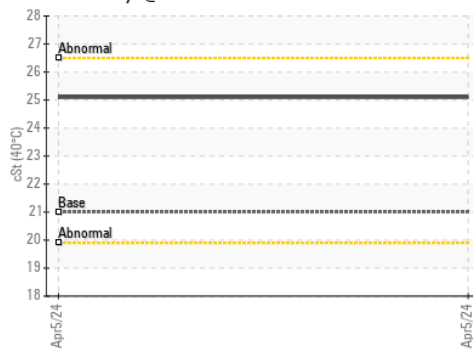

Acid Number

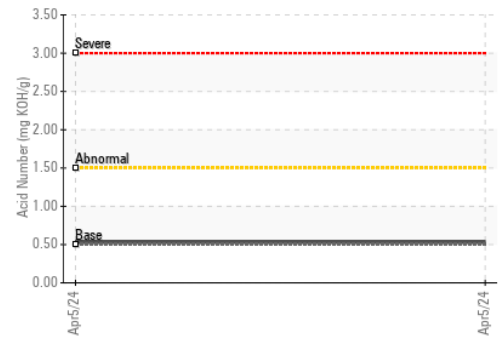

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0865231
Lab Number : 06148620
Unique Number : 10978698
Test Package : PLANT

Received : 15 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 17 Apr 2024 - Jonathan Hester

WALASHEK INDUSTRIAL & MARINE INC
 1428 MCKINLEY AVE
 NATIONAL CITY, CA
 US 91950
 Contact: BOB CLAGETT
 bobclagett@walashek.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: