


OIL ANALYSIS REPORT

LCAC-81 **LCAC-81 MAIN ENGINES**

4 Lube System

MILITARY MIL-L-23699D (--- GAL)

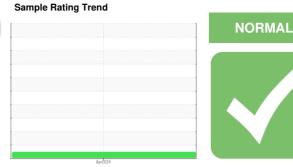

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for diagnostic comment updates. Please note that this is a corrected copy for diagnostic comment updates.

Wear

All component wear rates are normal.

Contamination

Discrete particle counts [100 ml] 5-15µm = 98800, $15-25\mu m = 5500, 25-50\mu m = 1700, 50-100\mu m =$ $100, >100\mu m = 0$. Class 8 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0865256		
Sample Date		Client Info		05 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		2		
Phosphorus	ppm	ASTM D5185m		1512		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		2		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>5000	4205		
Particles >6µm		ASTM D7647	>1300	1061		
Particles >14μm		ASTM D7647	>160	73		
Particles >21µm		ASTM D7647	>40	18		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/13		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	0.89		



OIL ANALYSIS REPORT

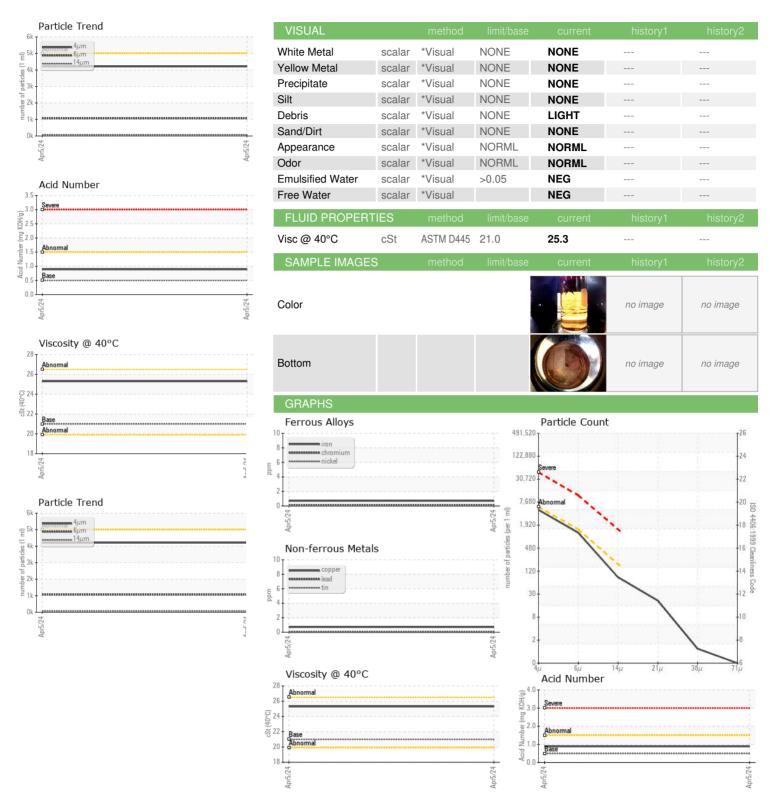





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0865256 Lab Number : 06148623 Unique Number : 10978701

Test Package : PLANT

Received : 15 Apr 2024 **Tested** : 17 Apr 2024 Diagnosed

: 24 Apr 2024 - Angela Borella

1428 MCKINLEY AVE NATIONAL CITY, CA

WALASHEK INDUSTRIAL & MARINE INC

US 91950 Contact: BOB CLAGETT bobclagett@walashek.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: