

LCAC-81

OIL ANALYSIS REPORT

Sample Rating Trend



Icac-81 PROP Component Starboard Lube System Fluid MILITARY MIL-L-23699D (--- GAL)

DIAGNOSIS

Area

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please note that this is a corrected copy for diagnostic comment updates. Please note that this is a corrected copy for diagnostic comment updates.

A Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil. Discrete particle counts [100 ml] $5-15\mu$ m = 15528500, $15-25\mu$ m = 230900, $25-50\mu$ m = 39100, $50-100\mu$ m = 800, $>100\mu$ m = 100. Class 12

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0865250		
Sample Date		Client Info		05 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4 35		
Chromium	ppm	ASTM D5185m	>20	7		
Nickel	ppm	ASTM D5185m	>20	4		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m		<1		
Tin	ppm	ASTM D5185m		0		
Vanadium	ppm	ASTM D5185m	-	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		۰ <1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		2		
Phosphorus	ppm	ASTM D5185m		1609		
Zinc	ppm	ASTM D5185m		0		
Sulfur		ASTM D5185m		-		
	ppm			5		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	A 370464		
Particles >6µm		ASTM D7647	>1300	🔺 157994		
Particles >14µm		ASTM D7647	>160	A 2709		
Particles >21µm		ASTM D7647	>40	<u> </u>		
Particles >38µm		ASTM D7647	>10	9		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 26/24/19		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	0.80		



400

300

<u>8</u> 250

TE 2001 150

50

400

350

300

분 200 150

a 100 50

3

3.50


Acid Nu

28

20

40°C)

OIL ANALYSIS REPORT

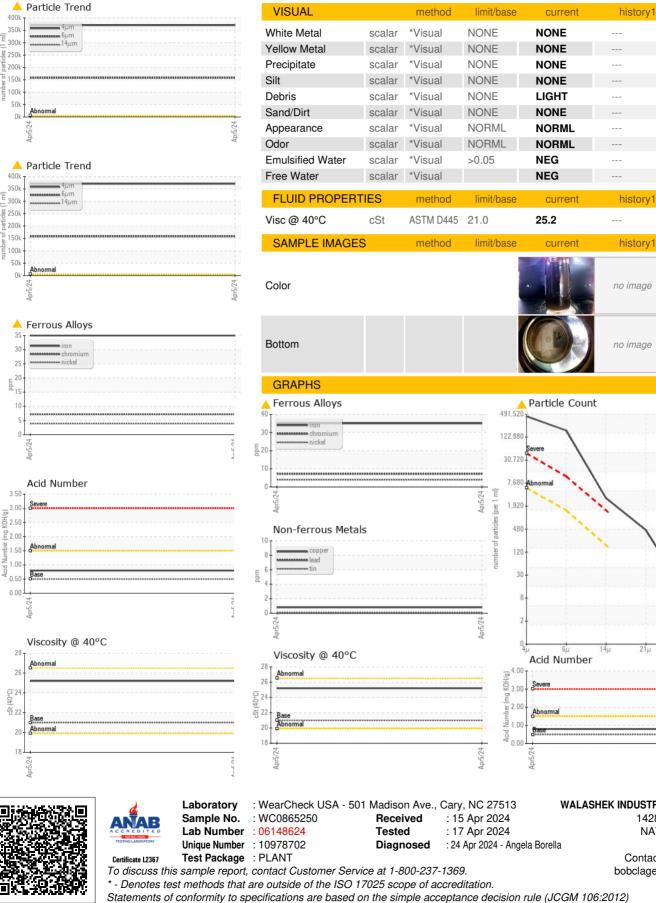

Submitted By: SHAWN LAHEY Page 2 of 2

WALASHEK INDUSTRIAL & MARINE INC 1428 MCKINLEY AVE NATIONAL CITY, CA US 91950 Contact: BOB CLAGETT bobclagett@walashek.com T: F:

210

38

history2

history2

history2

no imade

no imade

4406

:1999 Cle