


OIL ANALYSIS REPORT

BARRIER DEPARTMENT SAMPLES DAVIS STAND WEB 09 C EVA (S/N H9733)

Component Gearbox

TEXACO MEROPA 220 (25 GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0913512	WC0821012	WC0806403
Sample Date		Client Info		14 Apr 2024	08 Oct 2023	16 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	V	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	23	29	28
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	13	20	22
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	5	8	9
Barium	ppm	ASTM D5185m	0.5	2	4	0
Molybdenum	ppm	ASTM D5185m	1.1	3	4	5
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0.1	2	3	<1
Calcium	ppm	ASTM D5185m	1.6	17	25	24
Phosphorus	ppm	ASTM D5185m	159	233	301	327
Zinc	ppm	ASTM D5185m	0.5	14	17	16
Sulfur	ppm	ASTM D5185m	10342	5329	4918	5831
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2	3	3
Sodium	ppm	ASTM D5185m		3	2	4
Potassium	ppm	ASTM D5185m		1	1	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	1133	2839	1266
Particles >6µm		ASTM D7647		254	722	516
Particles >14μm		ASTM D7647	>640	44	78	74
Particles >21µm		ASTM D7647		9	21	12
Particles >38µm		ASTM D7647	>40	1	4	0
Particles >71μm		ASTM D7647	>10	0	3	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	17/15/13	19/17/13	17/16/13
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	ma K∩U/a	VCLM D604E		n 79	0.67	0.68




OIL ANALYSIS REPORT

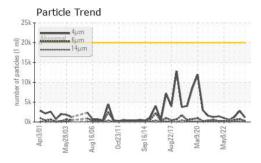







VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2


Visc @ 40°C	cSt	ASTM D445	219	168	164	164

SAMPLE IMAGES	method		

Color





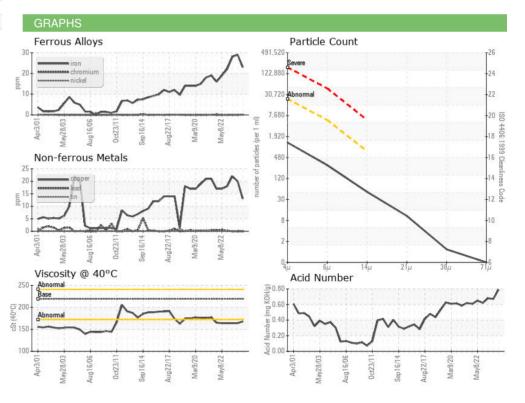





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number : 06148680 Unique Number : 10978758

: WC0913512

Received **Tested** Diagnosed

: 15 Apr 2024 : 16 Apr 2024

: 17 Apr 2024 - Don Baldridge

SEALED AIR CORP - CRYOVAC DIVISION 1301 WEST MAGNOLIA AVE IOWA PARK, TX

US 76367

Contact: KEVIN KETCHERSID kevin.a.ketchersid@sealedair.com T: (940)592-2111

Test Package : IND 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (940)592-2513