OIL ANALYSIS REPORT

Sample Rating Trend

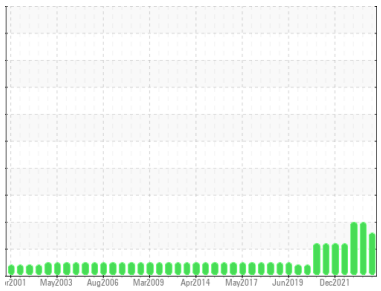

VISCOSITY

Area
BARRIER DEPARTMENT SAMPLES
Machine Id
DAVIS STAND WEB 05 SF SUBSTRATE (S/N M6191)
Component
Gearbox
Fluid
TEXACO MEROPA 220 (12 GAL)

DIAGNOSIS

Recommendation
We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
Viscosity of sample indicates oil is within ISO 320 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0913522**	WC0806379	WC0757251
Sample Date		Client Info		**14 Apr 2024**	08 Oct 2023	04 Apr 2023
Machine Age	hrs	Client Info		**0**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**ABNORMAL**	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.2	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	**25**	29	34
Chromium	ppm	ASTM D5185m	>15	**<1**	0	<1
Nickel	ppm	ASTM D5185m	>15	**0**	0	0
Titanium	ppm	ASTM D5185m		**0**	0	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>25	**<1**	0	0
Lead	ppm	ASTM D5185m	>100	**0**	<1	0
Copper	ppm	ASTM D5185m	>200	**1**	<1	<1
Tin	ppm	ASTM D5185m	>25	**0**	0	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	**4**	7	6
Barium	ppm	ASTM D5185m	0.5	**0**	0	1
Molybdenum	ppm	ASTM D5185m	1.1	**4**	5	6
Manganese	ppm	ASTM D5185m		**1**	2	2
Magnesium	ppm	ASTM D5185m	0.1	**6**	7	5
Calcium	ppm	ASTM D5185m	1.6	**13**	16	13
Phosphorus	ppm	ASTM D5185m	159	**148**	182	182
Zinc	ppm	ASTM D5185m	0.5	**15**	17	21
Sulfur	ppm	ASTM D5185m	10342	**3831**	3941	4322

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	**2**	2	3
Sodium	ppm	ASTM D5185m		**<1**	0	0
Potassium	ppm	ASTM D5185m	>20	**1**	<1	1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ **189450**	▲ 149851	▲ 143512
Particles >6µm		ASTM D7647	>5000	▲ **27295**	▲ 43340	▲ 34850
Particles >14µm		ASTM D7647	>640	**411**	▲ 674	▲ 882
Particles >21µm		ASTM D7647	>160	**48**	92	135
Particles >38µm		ASTM D7647	>40	**1**	2	2
Particles >71µm		ASTM D7647	>10	**0**	2	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ **25/22/16**	▲ 24/23/17	▲ 24/22/17

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.49**	0.47	0.43

OIL ANALYSIS REPORT

Particle Trend

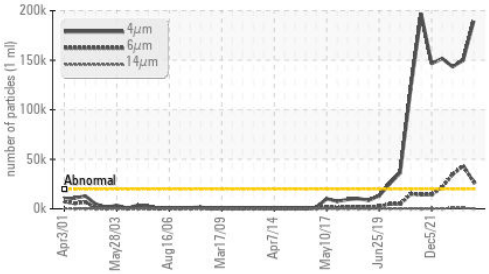

Particle Trend

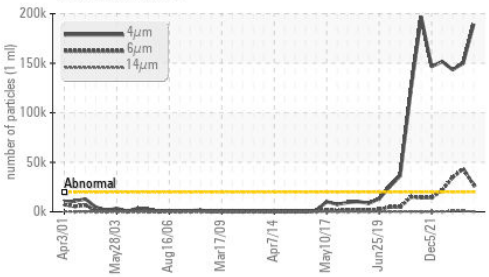

Viscosity @ 40°C

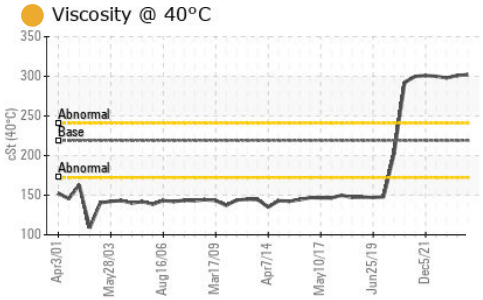

Acid Number

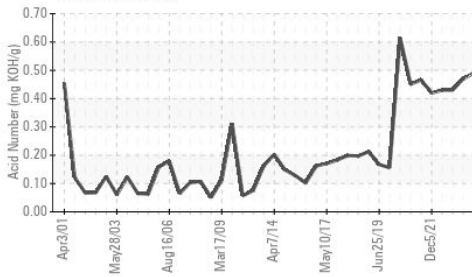

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	219	**302**	301	298

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

Ferrous Alloys

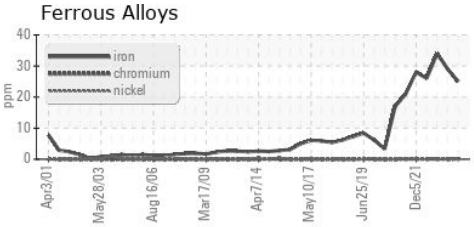

Non-ferrous Metals

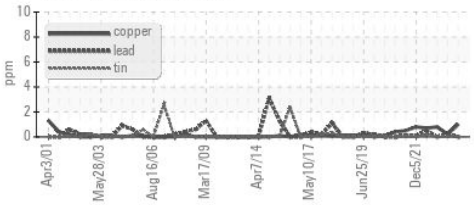

Viscosity @ 40°C

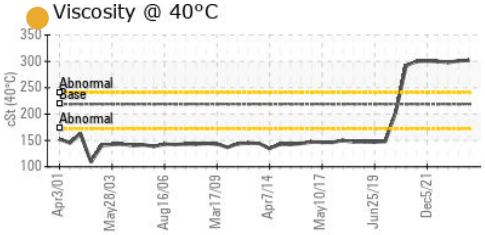

Particle Count

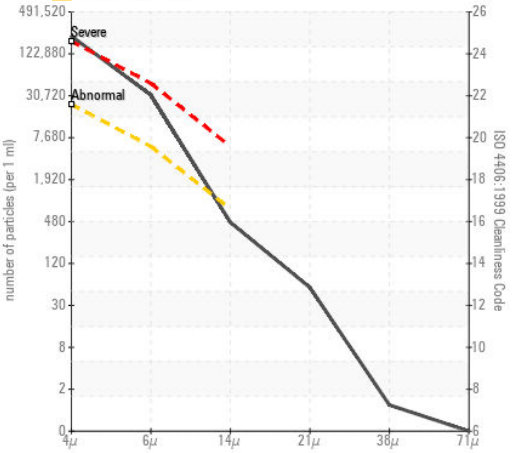

Acid Number

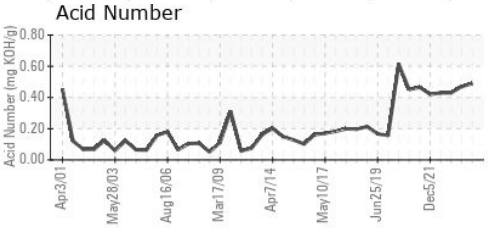

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0913522
Lab Number : 06148685
Unique Number : 10978763
Test Package : IND 2 (Additional Tests: PrtCount)

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 17 Apr 2024 - Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SEALED AIR CORP - CRYOVAC DIVISION
1301 WEST MAGNOLIA AVE
IOWA PARK, TX
US 76367
Contact: KEVIN KETCHERSID
kevin.a.ketchersid@sealedair.com
T: (940)592-2111
F: (940)592-2513