

OIL ANALYSIS REPORT


Area

BARRIER DEPARTMENT SAMPLES LUFKIN/WELEX WEB 05 SB SUBSTRATE (S/N 190-37866)

Component **Gearbox**

Fluid

TEXACO MEROPA 220 (25 GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0913520	WC0806381	WC0757253
Sample Date		Client Info		14 Apr 2024	08 Oct 2023	04 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	1	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	6	5	8
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	0
Lead	ppm	ASTM D5185m	>100	0	0	<1
Copper	ppm	ASTM D5185m	>200	3	3	3
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	39	46	39
Barium	ppm	ASTM D5185m	0.5	0	0	0
Molybdenum	ppm	ASTM D5185m	1.1	18	21	22
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	0.1	1	2	0
Calcium	ppm	ASTM D5185m	1.6	8	9	5
Phosphorus	ppm	ASTM D5185m	159	259	298	300
Zinc	ppm	ASTM D5185m	0.5	53	57	58
Sulfur	ppm	ASTM D5185m	10342	7277	6983	7136
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	5	7	8
Sodium	ppm	ASTM D5185m		2	1	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1185	650	2509
Particles >6µm		ASTM D7647	>5000	142	201	417
Particles >14µm		ASTM D7647	>640	15	20	52
Particles >21µm		ASTM D7647	>160	4	5	19
Particles >38µm		ASTM D7647	>40	0	2	1
Particles >71µm		ASTM D7647	>10	0	2	0
Oil Cleanliness		ISO 4406 (c)	>/19/16	17/14/11	17/15/11	19/16/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOH/a	ASTM D8045		0.49	0.52	0.52




OIL ANALYSIS REPORT

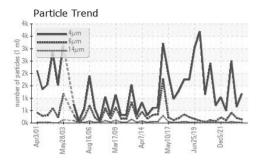








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	ΓIFS	method	limit/base	current	historv1	history2


Visc @ 40°C	cSt	ASTM D445	219	205	205	204

Color

SAMPLE IMAGES





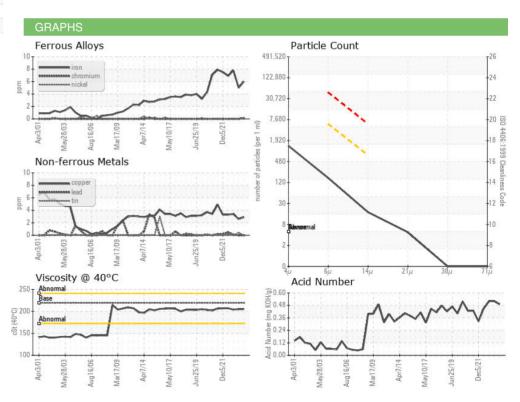





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number : 06148687

: WC0913520 Unique Number : 10978765 Test Package : IND 2 (Additional Tests: PrtCount)

Received : 15 Apr 2024 **Tested** Diagnosed

: 16 Apr 2024 : 17 Apr 2024 - Don Baldridge

SEALED AIR CORP - CRYOVAC DIVISION 1301 WEST MAGNOLIA AVE IOWA PARK, TX

> US 76367 Contact: KEVIN KETCHERSID kevin.a.ketchersid@sealedair.com

T: (940)592-2111 F: (940)592-2513

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)