

# Area BARRIER DEPARTMENT SAMPLES Machine Ia DAVIS STAND WEB 08 CC (S/N 6082)

Component Gearbox Fluid

**TEXACO MEROPA 220 (8 GAL)** 

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

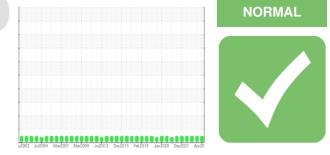

Sample Rating Trend


SAMPLE INFOR		method	limit/base	current	history1	history2
			minubase			
Sample Number		Client Info		WC0913495	WC0821016	WC0806408
Sample Date		Client Info		14 Apr 2024	08 Oct 2023	16 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	÷
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIC	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	9	12	10
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	8	12	11
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	0	0	0
Barium	ppm	ASTM D5185m	0.5	0	0	0
Molybdenum	ppm	ASTM D5185m	1.1	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0.1	1	2	0
Calcium	ppm	ASTM D5185m	1.6	3	6	2
Phosphorus	ppm	ASTM D5185m	159	237	317	316
Zinc	ppm	ASTM D5185m	0.5	2	1	<1
Sulfur	ppm	ASTM D5185m	10342	2818	3735	3874
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1	2	2
Sodium	ppm	ASTM D5185m		3	3	3
Potassium	ppm	ASTM D5185m	>20	1	<1	0
FLUID CLEANLII	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	598	8303	6267
Particles >6µm		ASTM D7647	>5000	131	1551	2023
Particles >14µm		ASTM D7647	>640	18	41	212
Particles >21µm		ASTM D7647	>160	5	9	52
Particles >38µm		ASTM D7647	>40	0	1	1
Particles >71µm		ASTM D7647	>10	0	1	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	16/14/11	20/18/13	20/18/15
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.50	0.48	0.45
·52·49) Rev: 1			Con			


Report Id: CRYIOW [WUSCAR] 06148693 (Generated: 04/17/2024 21:52:49) Rev: 1


Contact/Location: KEVIN KETCHERSID - CRYIOW




# **OIL ANALYSIS REPORT**

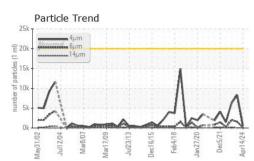


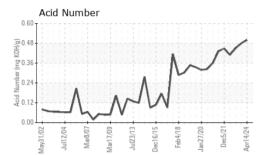


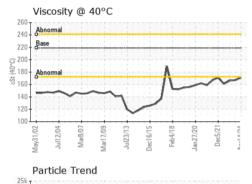



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	219	171	167	166
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

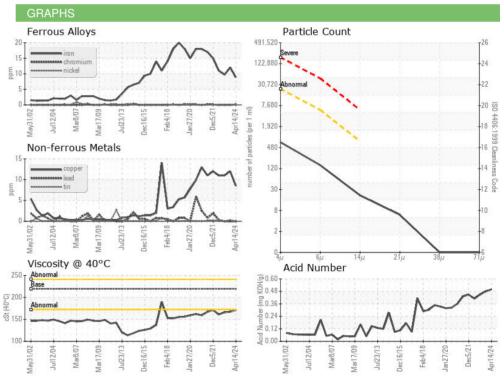

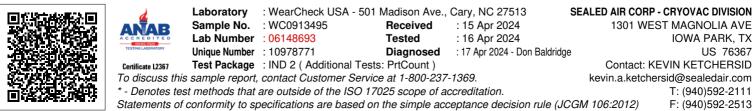

Report Id: CRYIOW [WUSCAR] 06148693 (Generated: 04/17/2024 21:52:49) Rev: 1

Contact/Location: KEVIN KETCHERSID - CRYIOW

Page 2 of 2