

OIL ANALYSIS REPORT


Area

BARRIER DEPARTMENT SAMPLES DAVIS STANDARD WEB 08 CF (S/N 6081)

Component Gearbox

Eluid

TEXACO MEROPA 220 (3 GAL)



Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | | n2002 Jul2004 | Mar2007 Mar2009 Juli | 013 Dec2015 Feb2018 Jan2020 | Oct2022 | |
|--------------------|---------|---------------|----------------------|-----------------------------|-------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0913497 | WC0821018 | WC0806410 |
| Sample Date | | Client Info | | 14 Apr 2024 | 08 Oct 2023 | 16 May 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| CONTAMINATION | 1 | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 3 | 3 | 3 |
| Chromium | ppm | ASTM D5185m | >15 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | 0 | 1 |
| Lead | ppm | ASTM D5185m | >100 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >200 | 6 | 9 | 8 |
| Tin | ppm | ASTM D5185m | >25 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 3.2 | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 0.5 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 1.1 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 0.1 | 2 | 2 | 0 |
| Calcium | ppm | ASTM D5185m | 1.6 | 3 | 4 | 2 |
| Phosphorus | ppm | ASTM D5185m | 159 | 235 | 348 | 329 |
| Zinc | ppm | ASTM D5185m | 0.5 | 1 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | 10342 | 2781 | 3851 | 3299 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 2 | 4 | 3 |
| Sodium | ppm | ASTM D5185m | | 3 | 2 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | <1 | 0 |
| FLUID CLEANLIN | ESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >20000 | 1257 | 3377 | 1116 |
| Particles >6µm | | ASTM D7647 | >5000 | 355 | 682 | 503 |
| Particles >14μm | | ASTM D7647 | >640 | 53 | 49 | 77 |
| Particles >21µm | | ASTM D7647 | >160 | 14 | 14 | 19 |
| Particles >38μm | | ASTM D7647 | >40 | 0 | 2 | 0 |
| Particles >71µm | | ASTM D7647 | >10 | 0 | 1 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >21/19/16 | 17/16/13 | 19/17/13 | 17/16/13 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| A = i = I NI (ANI) | I/OLI/- | ACTM DODAE | | 0.50 | 0.47 | 0.47 |




OIL ANALYSIS REPORT

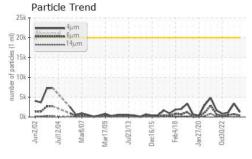







| VISUAL | | method | limit/base | current | history1 | history2 |
|-------------------------|--------|---------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | ΓIFS | method | limit/base | current | historv1 | history2 |


| I LOID I HOI LI | TILO | | | | | |
|-----------------|------|-----------|-----|-----|-----|-----|
| Visc @ 40°C | cSt | ASTM D445 | 219 | 166 | 163 | 161 |


| SAMPLE IMAGES | |
|---------------|--|
| | |

Color

Bottom





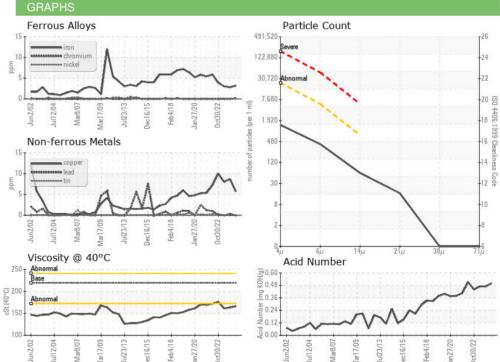





Certificate 12367

Laboratory Sample No.

: WC0913497 Lab Number : 06148694

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 $\textbf{Unique Number} \quad : 10978772$

Test Package : IND 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received **Tested** Diagnosed

: 15 Apr 2024 : 16 Apr 2024 : 17 Apr 2024 - Don Baldridge

SEALED AIR CORP - CRYOVAC DIVISION 1301 WEST MAGNOLIA AVE IOWA PARK, TX

US 76367 Contact: KEVIN KETCHERSID kevin.a.ketchersid@sealedair.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (940)592-2513 Contact/Location: KEVIN KETCHERSID - CRYIOW

T: (940)592-2111