


# **OIL ANALYSIS REPORT**

# BARRIER DEPARTMENT SAMPLES **WEB 16 CD**

Component **Gearbox** 

**TEXACO MEROPA 220 (--- GAL)** 





### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

## Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0913507	WC0806395	WC0757231
Sample Date		Client Info		14 Apr 2024	08 Oct 2023	04 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	DN	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	1	0	2
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>100	0	0	<1
Copper	ppm	ASTM D5185m	>200	2	1	2
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	0	0	0
Barium	ppm	ASTM D5185m	0.5	0	0	<1
Molybdenum	ppm	ASTM D5185m	1.1	0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	0.1	1	2	0
Calcium	ppm	ASTM D5185m	1.6	20	26	32
Phosphorus	ppm	ASTM D5185m	159	158	193	205
Zinc	ppm	ASTM D5185m	0.5	0	0	4
Sulfur	ppm	ASTM D5185m	10342	6144	6479	7663
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	17	27	27
Sodium	ppm	ASTM D5185m		4	2	2
Potassium	ppm	ASTM D5185m	>20	1	<1	2
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	1444	12901	1162
Particles >6µm		ASTM D7647	>5000	582	2507	573
Particles >14μm		ASTM D7647	>640	94	61	177
Particles >21µm		ASTM D7647	>160	15	12	34
Particles >38µm		ASTM D7647	>40	1	1	0
Particles >71µm		ASTM D7647	>10	0	1	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/16/14	21/19/13	17/16/15
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
A		AOTH Book		0.46	0.40	0.10




# **OIL ANALYSIS REPORT**









VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


I LOID I NOI LINI	ILO	memou			HISTOLAL	HISTOLYZ
Visc @ 40°C	cSt	ASTM D445	219	205	205	208

SAMPLE IMAGES	method	limit/base	current	history1	histo

Color





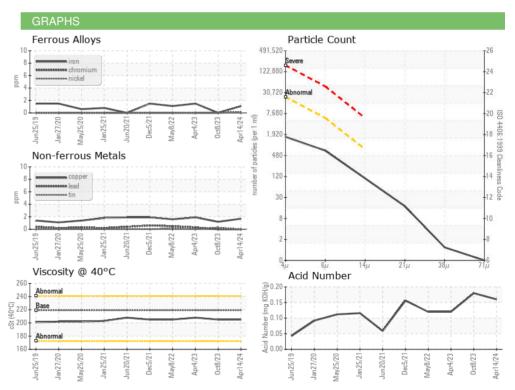





Certificate 12367

Laboratory Sample No. Lab Number : 06148698

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0913507

Unique Number : 10978776

Test Package : IND 2 ( Additional Tests: PrtCount )

Received **Tested** Diagnosed

: 15 Apr 2024 : 16 Apr 2024

: 16 Apr 2024 - Wes Davis

**SEALED AIR CORP - CRYOVAC DIVISION** 1301 WEST MAGNOLIA AVE IOWA PARK, TX

US 76367 Contact: KEVIN KETCHERSID kevin.a.ketchersid@sealedair.com

T: (940)592-2111 F: (940)592-2513

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)