




OIL ANALYSIS REPORT

Sample Rating Trend

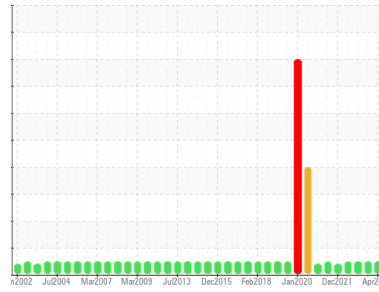

NORMAL



Area

BARRIER DEPARTMENT SAMPLES

Machine Id

DAVIS STANDARD WEB 08 SD (S/N 9546)

Component

Gearbox

Fluid

TEXACO MEROPA 220 (2 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0913500	WC0821014	WC0806406
Sample Date	Client Info			14 Apr 2024	08 Oct 2023	16 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	12	19	17
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	2	1
Lead	ppm	ASTM D5185m	>100	1	2	<1
Copper	ppm	ASTM D5185m	>200	18	29	30
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	<1	2	2
Barium	ppm	ASTM D5185m	0.5	0	0	0
Molybdenum	ppm	ASTM D5185m	1.1	0	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0.1	4	1	3
Calcium	ppm	ASTM D5185m	1.6	6	8	9
Phosphorus	ppm	ASTM D5185m	159	108	175	160
Zinc	ppm	ASTM D5185m	0.5	20	26	28
Sulfur	ppm	ASTM D5185m	10342	3814	5383	5809

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	7	9
Sodium	ppm	ASTM D5185m		2	2	2
Potassium	ppm	ASTM D5185m	>20	<1	0	0


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1192	1294	2557
Particles >6µm		ASTM D7647	>5000	291	420	537
Particles >14µm		ASTM D7647	>640	49	87	35
Particles >21µm		ASTM D7647	>160	17	19	5
Particles >38µm		ASTM D7647	>40	5	1	0
Particles >71µm		ASTM D7647	>10	3	0	0
Oil Cleanliness		ISO 4406 (c)	>--/19/16	17/15/13	17/16/14	19/16/12

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.52	0.52	0.45




OIL ANALYSIS REPORT


Particle Trend

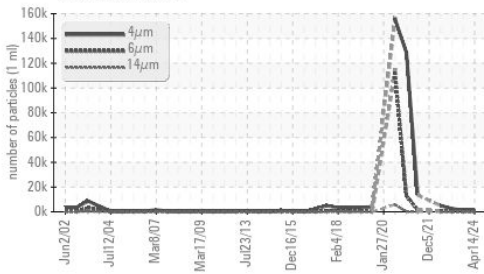


Acid Number

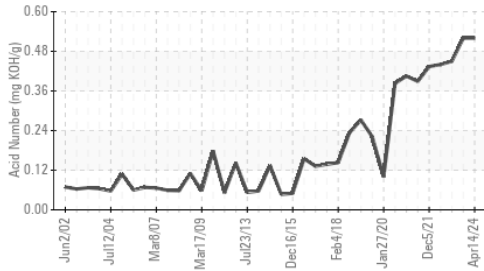

Viscosity @ 40°C

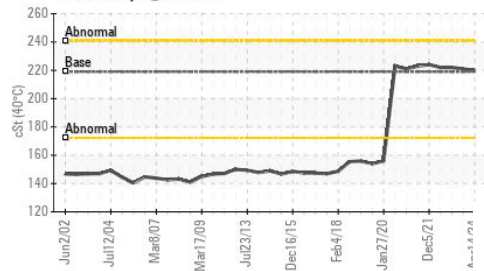

Particle Trend

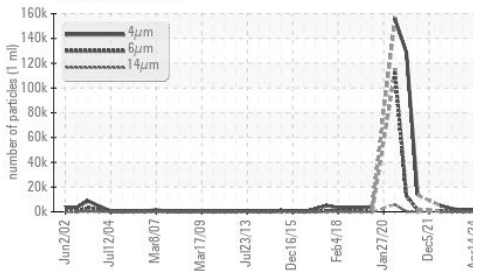

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 219	220	221	222

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

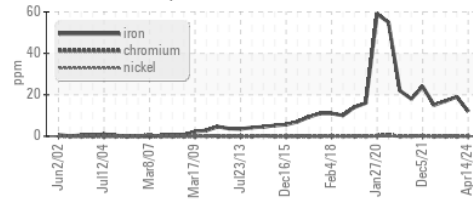


Non-ferrous Metals

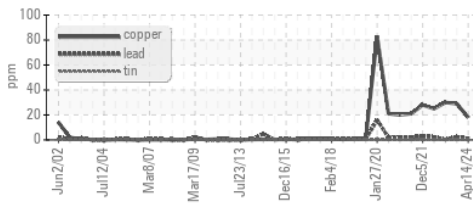


Viscosity @ 40°C

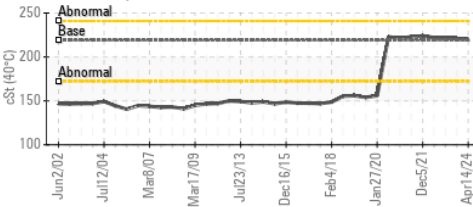

Particle Count

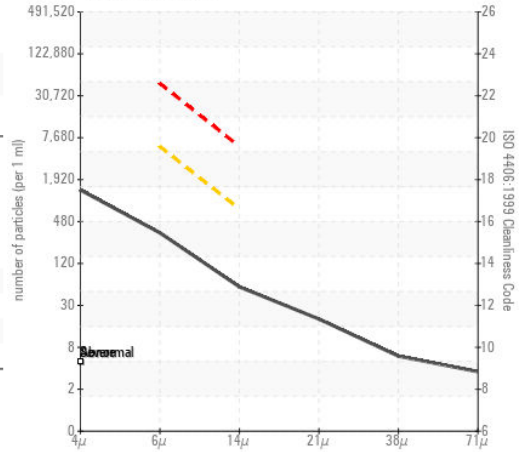

Acid Number

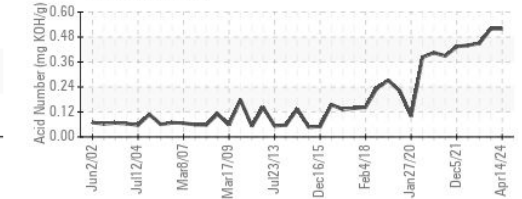

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0913500

Lab Number : 06148705

Unique Number : 10978783

Test Package : IND 2 (Additional Tests: PrtCount)

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 16 Apr 2024 - Wes Davis

SEALED AIR CORP - CRYOVAC DIVISION

1301 WEST MAGNOLIA AVE

IOWA PARK, TX

US 76367

Contact: KEVIN KETCHERSID

kevin.a.ketchersid@sealedair.com

T: (940)592-2111

F: (940)592-2513

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)