

# **OIL ANALYSIS REPORT**

# Area Recovery Machine Io FFI15AB01 Harvest Tank

Component Agitator Gearbox Fluid JAX FGG-AW ISO 220 (7 GAL)

# DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: Need information on sample back ASAP )

#### Wear

All component wear rates are normal.

## Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          |              |            | Apr2024         |          |          |
|------------------|----------|--------------|------------|-----------------|----------|----------|
|                  |          |              |            |                 |          |          |
| SAMPLE INFORM    | IATION   | method       | limit/base | current         | history1 | history2 |
| Sample Number    |          | Client Info  |            | WC0883708       |          |          |
| Sample Date      |          | Client Info  |            | 11 Apr 2024     |          |          |
| Machine Age      | hrs      | Client Info  |            | 0               |          |          |
| Oil Age          | hrs      | Client Info  |            | 0               |          |          |
| Oil Changed      |          | Client Info  |            | N/A             |          |          |
| Sample Status    |          |              |            | ABNORMAL        |          |          |
| WEAR METALS      |          | method       | limit/base | current         | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >150       | 63              |          |          |
| Chromium         | ppm      | ASTM D5185m  | >10        | 0               |          |          |
| Nickel           | ppm      | ASTM D5185m  | >10        | <1              |          |          |
| Titanium         | ppm      | ASTM D5185m  |            | <1              |          |          |
| Silver           | ppm      | ASTM D5185m  |            | 0               |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >25        | 9               |          |          |
| Lead             | ppm      | ASTM D5185m  | >100       | 0               |          |          |
| Copper           | ppm      | ASTM D5185m  | >50        | 1               |          |          |
| Tin              | ppm      | ASTM D5185m  | >10        | <1              |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | 0               |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0               |          |          |
|                  | 1-1-     |              | 11 1. 0    |                 |          |          |
| ADDITIVES        |          | method       | limit/base | current         | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 0               |          |          |
| Barium           | ppm      | ASTM D5185m  |            | <1              |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 0               |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | 1               |          |          |
| Magnesium        | ppm      | ASTM D5185m  |            | 2               |          |          |
| Calcium          | ppm      | ASTM D5185m  |            | 7               |          |          |
| Phosphorus       | ppm      | ASTM D5185m  |            | 663             |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 9               |          |          |
| Sulfur           | ppm      | ASTM D5185m  |            | 678             |          |          |
| CONTAMINANTS     |          | method       | limit/base | current         | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >50        | 7               |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 6               |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 1               |          |          |
| Water            | %        | ASTM D6304   | >0.1       | 0.002           |          |          |
| ppm Water        | ppm      | ASTM D6304   | >1000      | 17              |          |          |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current         | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   | >20000     | <b>A</b> 207930 |          |          |
| Particles >6µm   |          | ASTM D7647   | >5000      | <u> </u>        |          |          |
| Particles >14µm  |          | ASTM D7647   | >640       | 120             |          |          |
| Particles >21µm  |          | ASTM D7647   | >160       | 16              |          |          |
| Particles >38µm  |          | ASTM D7647   | >40        | 1               |          |          |
| Particles >71µm  |          | ASTM D7647   | >10        | 0               |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >21/19/16  | <b>25/22/14</b> |          |          |
| FLUID DEGRADA    | TION     | method       | limit/base | current         | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   |            | 0.73            |          |          |


Sample Rating Trend






(maa)

# **OIL ANALYSIS REPORT**

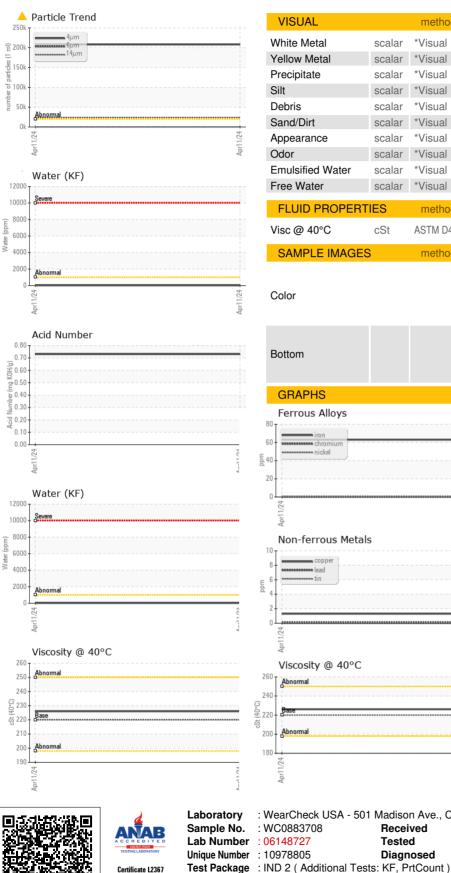

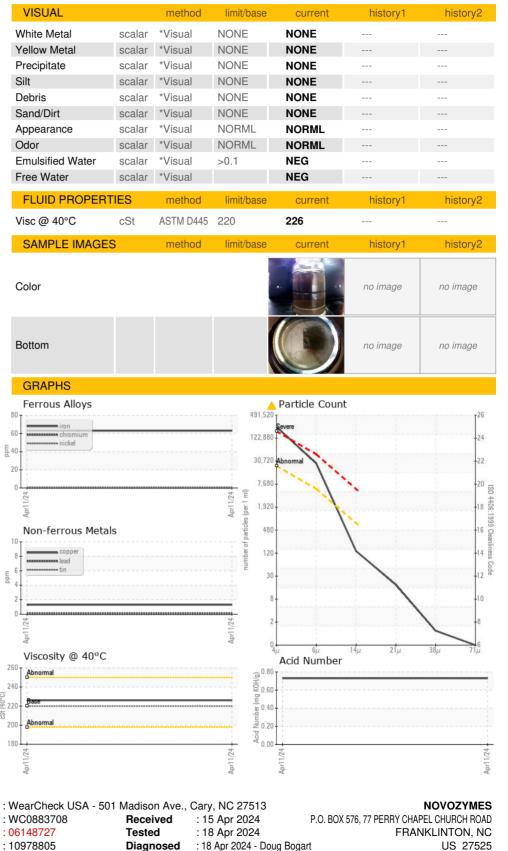

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: NOVFRANC [WUSCAR] 06148727 (Generated: 04/18/2024 09:23:06) Rev: 1

Submitted By: CHASE MCGEE

Contact: BRUCE THOMAS

brct@novozymes.com

T: (919)494-3146

F: (919)494-3456

Page 2 of 2