




OIL ANALYSIS REPORT

Sample Rating Trend

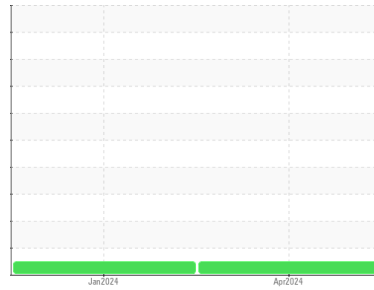

NORMAL



Machine Id
COMPRESSOR 5 (S/N 503287)
 Component
Air Compressor
 Fluid
USPI COMP CLEAN II (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		USPM36686	USPM30712	---
Sample Date	Client Info		09 Apr 2024	11 Jan 2024	---
Machine Age	hrs	Client Info	44767	44504	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			NORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >70	1	0	---
Chromium	ppm	ASTM D5185m >15	0	0	---
Nickel	ppm	ASTM D5185m >6	<1	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >10	<1	0	---
Lead	ppm	ASTM D5185m >20	0	0	---
Copper	ppm	ASTM D5185m >80	2	1	---
Tin	ppm	ASTM D5185m >15	<1	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m	2	0	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	4	3	---
Calcium	ppm	ASTM D5185m	3	4	---
Phosphorus	ppm	ASTM D5185m	7	0	---
Zinc	ppm	ASTM D5185m	53	43	---
Sulfur	ppm	ASTM D5185m	612	499	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >12	<1	<1	---
Sodium	ppm	ASTM D5185m	8	4	---
Potassium	ppm	ASTM D5185m >20	8	4	---
Water	%	ASTM D6304 >0.1	0.033	0.033	---
ppm Water	ppm	ASTM D6304 >1000	338	331	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	2679	5844	---
Particles >6µm	ASTM D7647	>2500	239	1016	---
Particles >14µm	ASTM D7647	>640	25	33	---
Particles >21µm	ASTM D7647	>160	7	5	---
Particles >38µm	ASTM D7647	>40	0	1	---
Particles >71µm	ASTM D7647	>10	0	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/16	19/15/12	20/17/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.80	0.68	---




OIL ANALYSIS REPORT

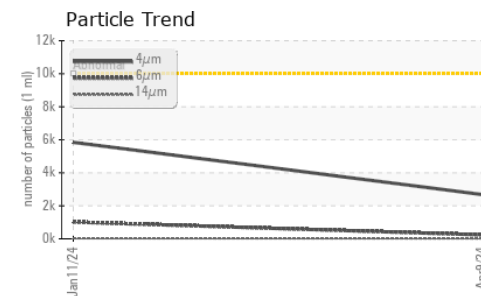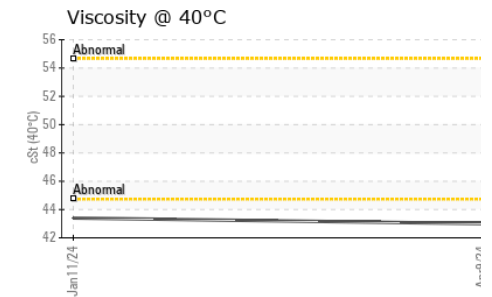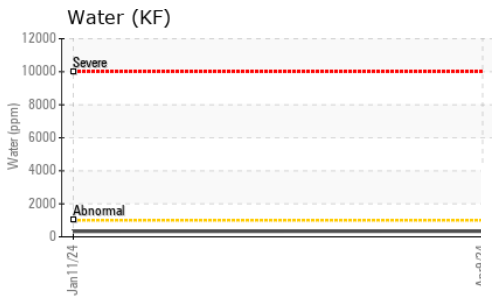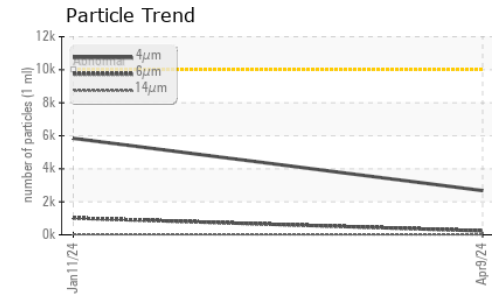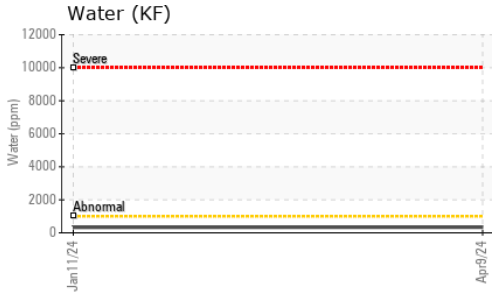






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.0	43.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

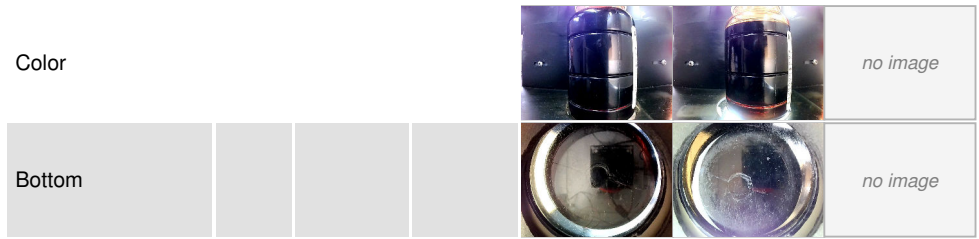

GRAPHS

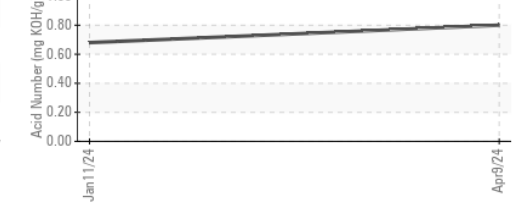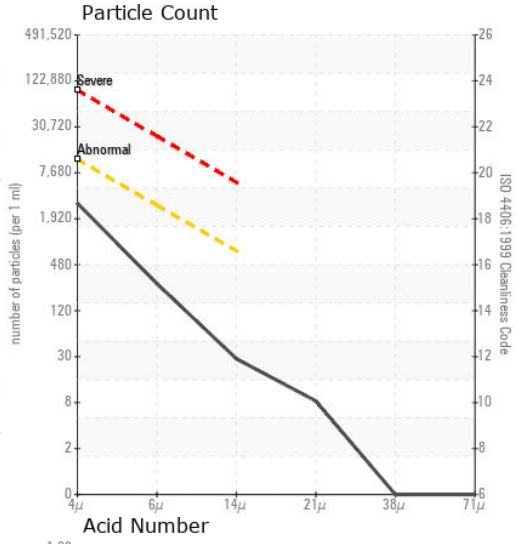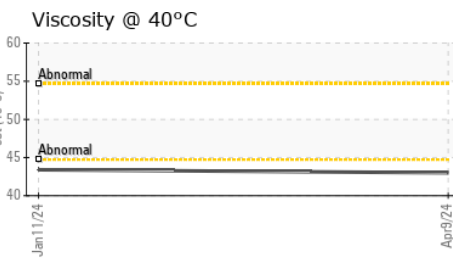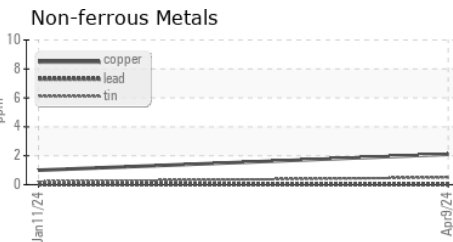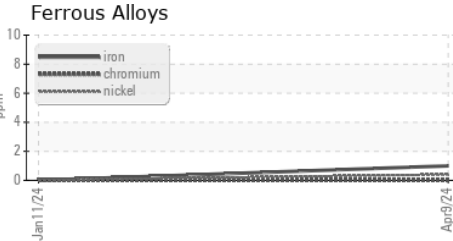

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USPM36686
Lab Number : 06148732
Unique Number : 10978810
Test Package : IND 2
Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 16 Apr 2024 - Doug Bogart

KraftHeinz - Holland - Plant 8385
 431 W 16TH ST
 HOLLAND, MI
 US 49423
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: