



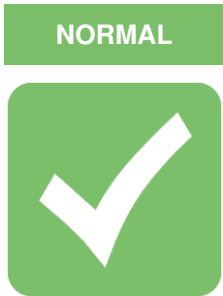

OIL ANALYSIS REPORT

Area
Z-PAG 32
Machine Id
SULLAIR 201406110017 - CABELL WRAPPER
Component
Compressor

Sample Rating Trend

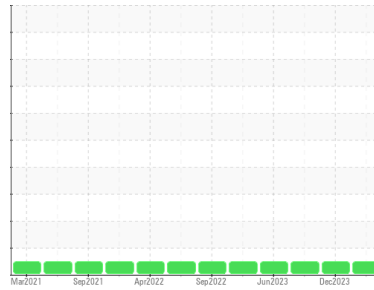

DIAGNOSIS

- Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the component.
- Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		UCZ06148761	UCZ06044117	UCZ05961346
Sample Date	Client Info		05 Apr 2024	15 Dec 2023	15 Sep 2023
Machine Age	hrs	Client Info	50133	48304	46823
Oil Age	hrs	Client Info	6605	4776	3295
Oil Changed		Client Info	N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.8	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0
Chromium	ppm	ASTM D5185m	>5	0	<1
Nickel	ppm	ASTM D5185m		0	0
Titanium	ppm	ASTM D5185m		0	0
Silver	ppm	ASTM D5185m		0	0
Aluminum	ppm	ASTM D5185m	>15	0	2
Lead	ppm	ASTM D5185m	>65	0	0
Copper	ppm	ASTM D5185m	>65	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0	0
Barium	ppm	ASTM D5185m	525	227	240
Molybdenum	ppm	ASTM D5185m	10	0	0
Manganese	ppm	ASTM D5185m		<1	0
Magnesium	ppm	ASTM D5185m	5	0	<1
Calcium	ppm	ASTM D5185m	10	0	1
Phosphorus	ppm	ASTM D5185m	250	<1	35
Zinc	ppm	ASTM D5185m	100	0	0
Sulfur	ppm	ASTM D5185m	400	407	385

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	1	3
Sodium	ppm	ASTM D5185m		66	73
Potassium	ppm	ASTM D5185m	>20	<1	4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.34	0.36




OIL ANALYSIS REPORT

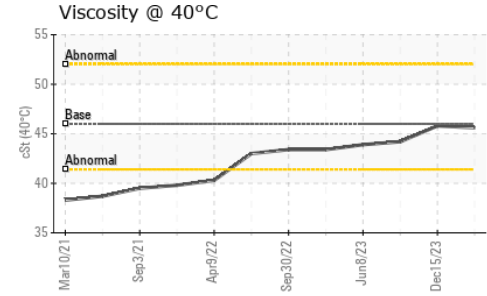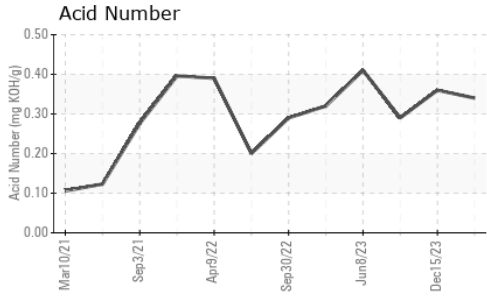





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.8	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.6	45.8	44.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

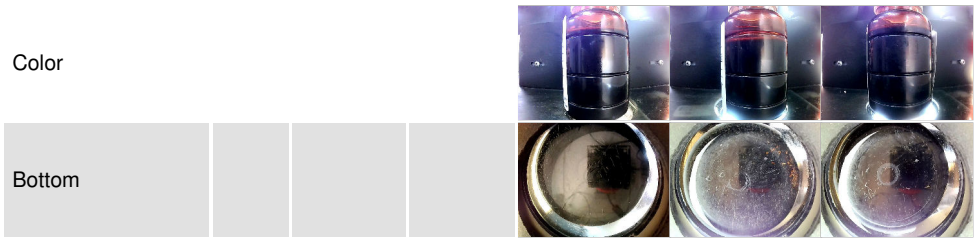

GRAPHS

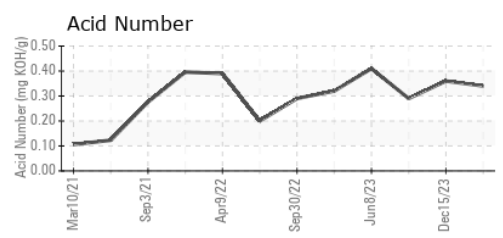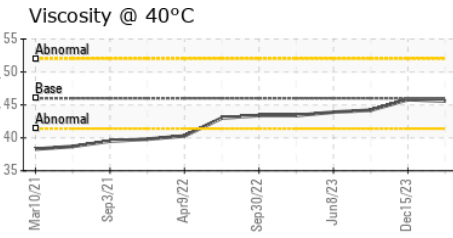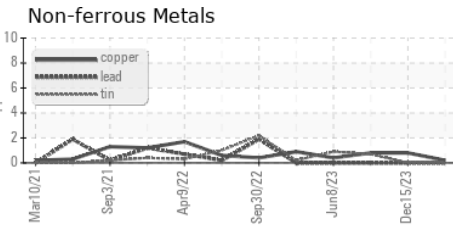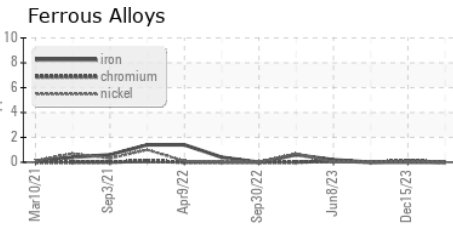

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCZ06148761 **Received** : 15 Apr 2024
Lab Number : **06148761** **Tested** : 16 Apr 2024
Unique Number : 10978839 **Diagnosed** : 17 Apr 2024 - Sean Felton
Test Package : IND 2

ZORN COMP & EQUIPMENT CO (GB)
 733 POTTS AVE
 GREEN BAY, WI
 US 54304
 Contact: DEAN SCHAD
 dean.schad@zornair.com
 T: (920)391-8121
 F: (920)499-1168

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)