




OIL ANALYSIS REPORT



Machine Id
WVTM01BE
 Component
Biogas Engine
 Fluid
MOBIL Pegasus™ 605 Ultra 40 (--- GAL)

Sample Rating Trend

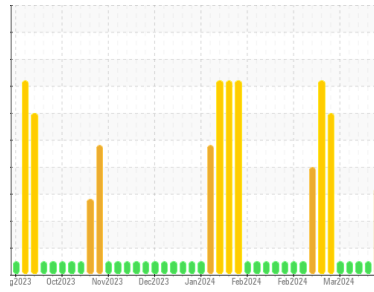

DEGRADATION



DIAGNOSIS

▲ Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The BN level is low. The AN level is acceptable for this fluid. The oil is no longer serviceable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0895536	WC0895562	WC0895555
Sample Date	Client Info		11 Apr 2024	02 Apr 2024	29 Mar 2024
Machine Age	hrs	Client Info	115404	115189	115094
Oil Age	hrs	Client Info	572	357	262
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			SEVERE	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method		NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >14	5	4	3
Chromium	ppm	ASTM D5185m >3	0	0	0
Nickel	ppm	ASTM D5185m	<1	0	0
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >5	2	2	2
Lead	ppm	ASTM D5185m >8	<1	0	0
Copper	ppm	ASTM D5185m >5	1	1	<1
Tin	ppm	ASTM D5185m >3	2	2	2
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	62	44	66
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	2	2	0
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	14	16	11
Calcium	ppm	ASTM D5185m	1659	1647	1635
Phosphorus	ppm	ASTM D5185m	369	333	386
Zinc	ppm	ASTM D5185m	503	546	550
Sulfur	ppm	ASTM D5185m	4699	5256	5269

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >180	158	127	101
Sodium	ppm	ASTM D5185m >20	2	1	1
Potassium	ppm	ASTM D5185m >20	0	0	0

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0
Nitration	Abs/cm	*ASTM D7624	3.8	3.7	3.4
Sulfation	Abs/.1mm	*ASTM D7415	24.6	23.6	21.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	12.6	12.2	10.8
Acid Number (AN)	mg KOH/g	ASTM D8045	2.19	1.99	1.94
Base Number (BN)	mg KOH/g	ASTM D2896 5.7	▲ 2.29	2.46	2.83












OIL ANALYSIS REPORT

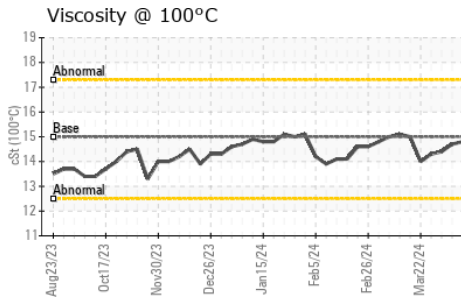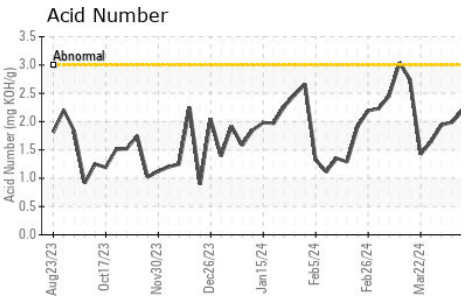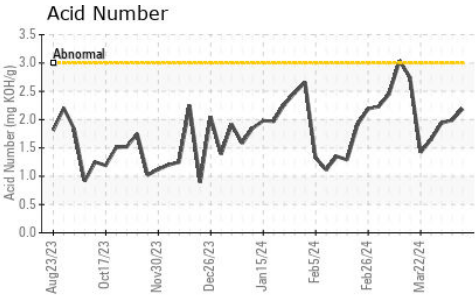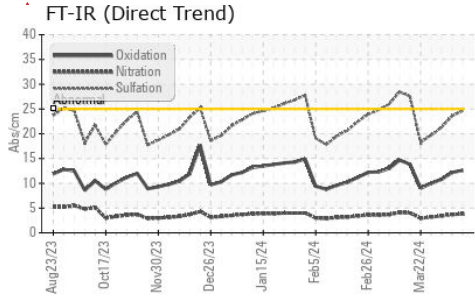

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15	14.8	14.7	14.4

GRAPHS

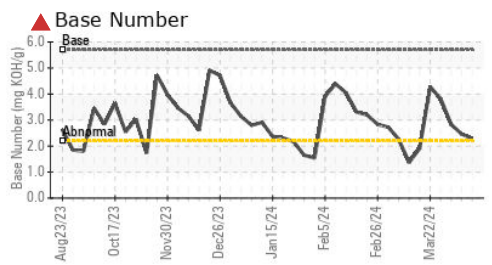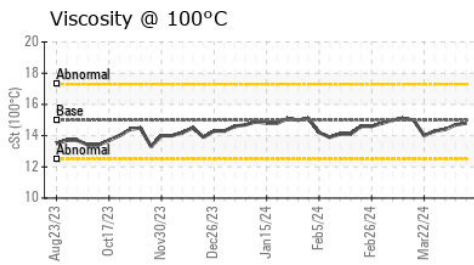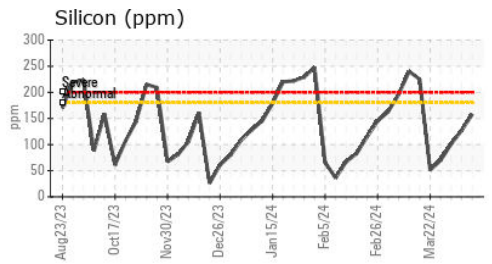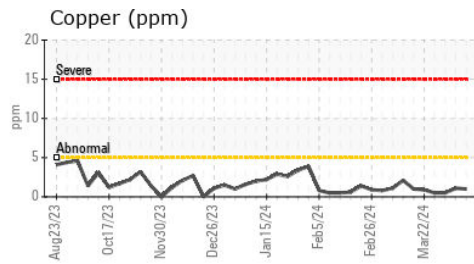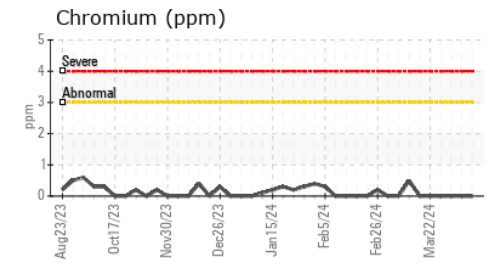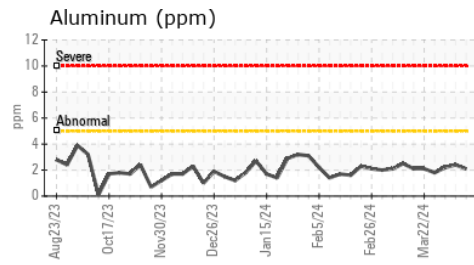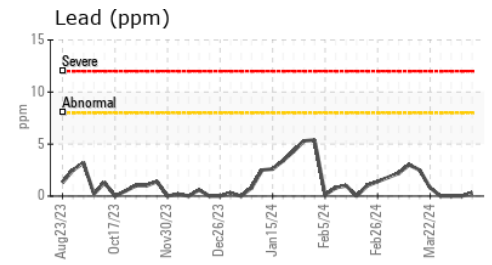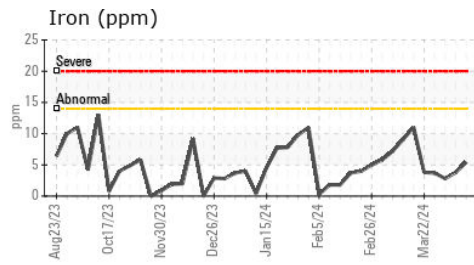

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0895536
Lab Number : 06148892
Unique Number : 10978970
Test Package : MOB 2
Received : 15 Apr 2024
Tested : 19 Apr 2024
Diagnosed : 19 Apr 2024 - Jonathan Hester

EDL NA Recips-Watervliet
 Watervliet Powerstation, 3563 Hennessey Road
 Watervliet, MI
 US 49098

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Scott Eastman
scott.eastman@edlenergy.com

T:
F: