




OIL ANALYSIS REPORT

Sample Rating Trend

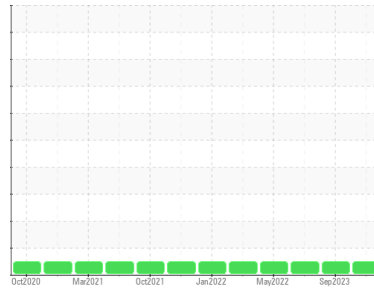

NORMAL



Machine Id

58

Component

Diesel Engine

Fluid

PURUS SYNTHETIC BLEND 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			RW0005297	RW0004559	RW0004104
Sample Date	Client Info			10 Apr 2024	18 Sep 2023	16 May 2023
Machine Age	mls	Client Info		277055	242882	232349
Oil Age	mls	Client Info		16000	16000	16000
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	33	54	56
Chromium	ppm	ASTM D5185m	>20	1	1	2
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	3	0
Lead	ppm	ASTM D5185m	>40	<1	1	<1
Copper	ppm	ASTM D5185m	>330	4	7	4
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		4	11	49
Barium	ppm	ASTM D5185m		0	7	0
Molybdenum	ppm	ASTM D5185m		61	59	38
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		874	822	586
Calcium	ppm	ASTM D5185m		1116	1123	1496
Phosphorus	ppm	ASTM D5185m		917	1032	755
Zinc	ppm	ASTM D5185m		1102	1162	940
Sulfur	ppm	ASTM D5185m		3086	3126	2627




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	6	6
Sodium	ppm	ASTM D5185m		2	2	0
Potassium	ppm	ASTM D5185m	>20	<1	5	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	10.8	11.7	13.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	22.6	26.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.6	22.4	31.5
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.15	8.10	7.95











OIL ANALYSIS REPORT

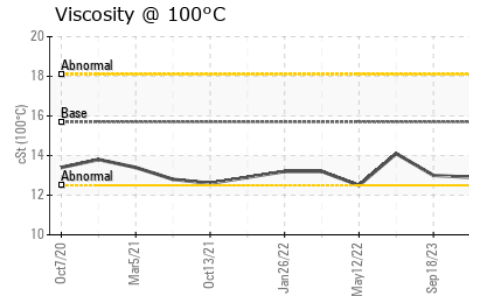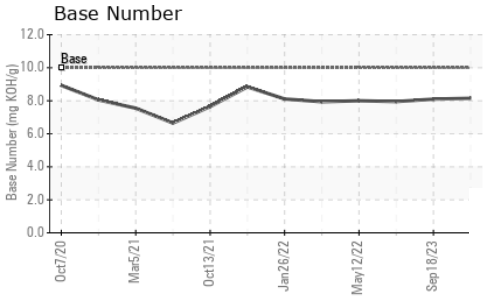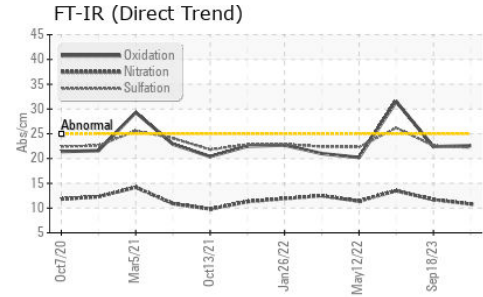

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.7	12.9	13.0

GRAPHS

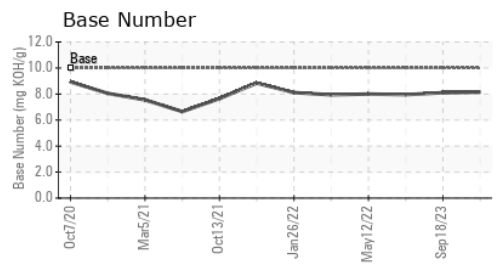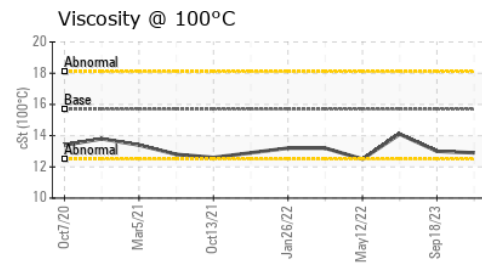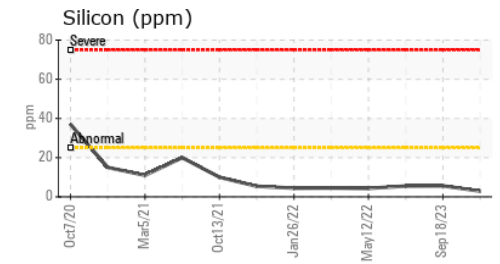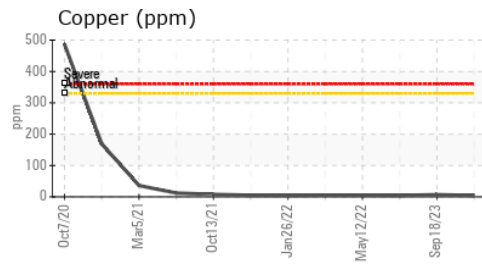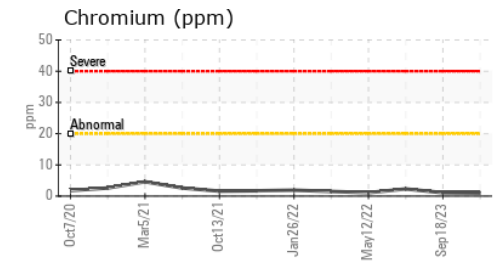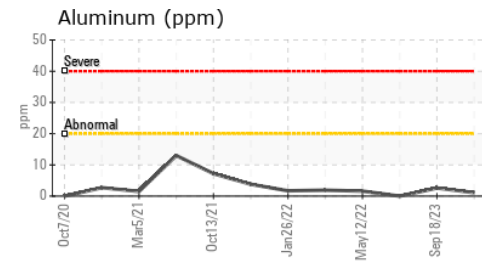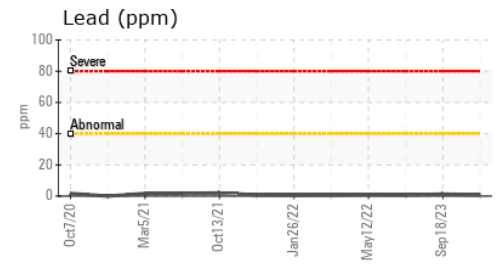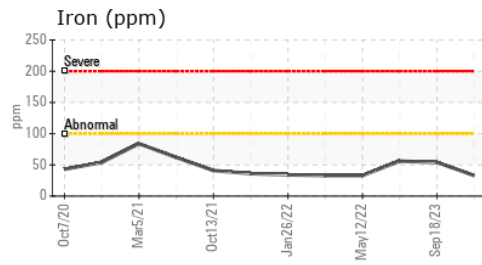

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0005297 **Received** : 15 Apr 2024
Lab Number : 06148903 **Tested** : 16 Apr 2024
Unique Number : 10978981 **Diagnosed** : 16 Apr 2024 - Wes Davis
Test Package : MOB 2

BURNETTE FOODS INC
 701 US 31 N
 ELK RAPIDS, MI
 US 49629
 Contact: roger WILSON
 mseguin@burnettefoods.com
 T: (231)342-3688
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)