


# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**

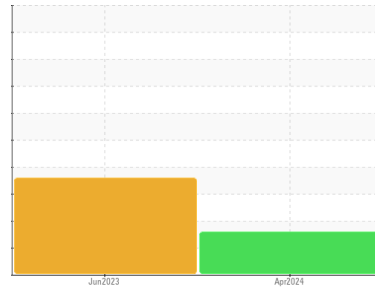

Machine Id  
**1904**  
Component  
**Transmission (Auto)**  
Fluid  
**CASTROL TRANSYND (--- GAL)**

**DIAGNOSIS**

**Recommendation**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**

Bearing and/or bushing wear is indicated.

**Contamination**

There is no indication of any contamination in the fluid.

**Fluid Condition**

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HRE0000113</b>	WC0810277	---
Sample Date	Client Info			<b>02 Apr 2024</b>	01 Jun 2023	---
Machine Age	mls	Client Info		<b>132853</b>	110672	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Not Changed</b>	Changed	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	<b>39</b>	76	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	2	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>5	<b>8</b>	4	---
Aluminum	ppm	ASTM D5185m	>50	<b>49</b>	▲ 91	---
Lead	ppm	ASTM D5185m	>50	<b>2</b>	2	---
Copper	ppm	ASTM D5185m	>225	▲ <b>251</b>	▲ 386	---
Tin	ppm	ASTM D5185m	>10	▲ <b>17</b>	▲ 32	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	133	<b>75</b>	107	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	1	---
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Calcium	ppm	ASTM D5185m	27	<b>167</b>	89	---
Phosphorus	ppm	ASTM D5185m	293	<b>236</b>	329	---
Zinc	ppm	ASTM D5185m	0	<b>39</b>	10	---
Sulfur	ppm	ASTM D5185m	1050	<b>1435</b>	1316	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	10	---
Sodium	ppm	ASTM D5185m		<b>8</b>	12	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	▲ MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---




# OIL ANALYSIS REPORT

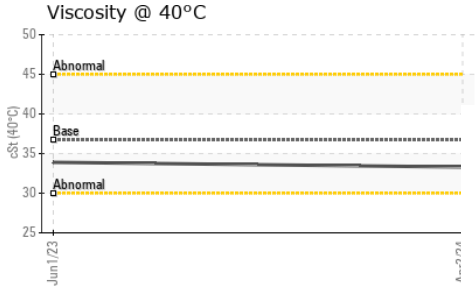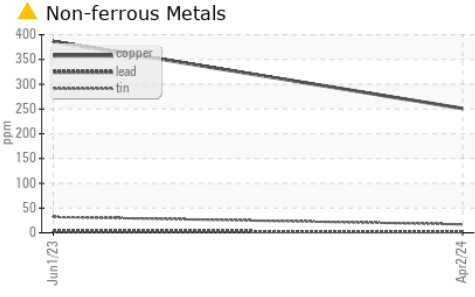

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 36.7	<b>33.3</b>	33.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

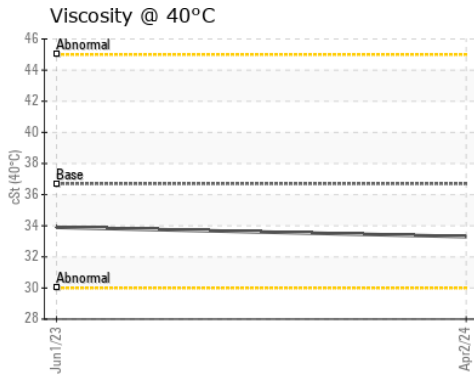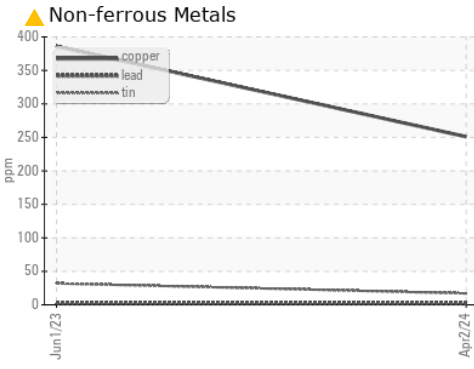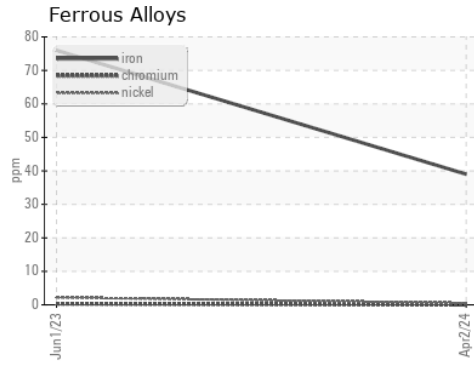

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000113      **Received** : 15 Apr 2024  
**Lab Number** : **06149191**      **Tested** : 16 Apr 2024  
**Unique Number** : 10979269      **Diagnosed** : 17 Apr 2024 - Sean Felton  
**Test Package** : FLEET

**TOWN OF CHAPEL HILL**  
 6900 MILLHOUSE RD  
 CHAPEL HILL, NC  
 US 27516  
 Contact: Lisa DePasqua  
 ldepasqua@townofchapelhill.org  
 T: (919)696-4941  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)