




# OIL ANALYSIS REPORT

## Sample Rating Trend

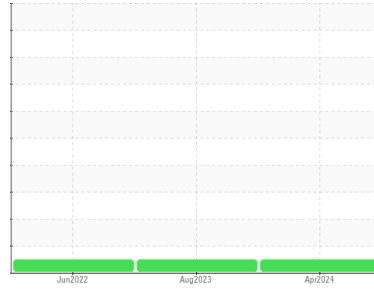

**NORMAL**



Area

**[22514]**

Machine Id

**40-220L**

Component

**Diesel Engine**

Fluid

**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0923356</b>	WC0818652	WC0709401
Sample Date	Client Info		<b>02 Apr 2024</b>	08 Aug 2023	20 Jun 2022
Machine Age	hrs	Client Info	<b>1232</b>	809	402
Oil Age	hrs	Client Info	<b>423</b>	407	402
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>20</b>	21	46
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	19	107
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	<b>100</b>	100	60
Barium	ppm	ASTM D5185m	<b>0</b>	0	5
Molybdenum	ppm	ASTM D5185m	<b>55</b>	63	63
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	5
Magnesium	ppm	ASTM D5185m 350	<b>455</b>	421	426
Calcium	ppm	ASTM D5185m 1800	<b>2041</b>	1929	1846
Phosphorus	ppm	ASTM D5185m 1000	<b>1215</b>	1080	1078
Zinc	ppm	ASTM D5185m 1100	<b>1438</b>	1323	1336
Sulfur	ppm	ASTM D5185m 3500	<b>4271</b>	4035	3199

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	10
Sodium	ppm	ASTM D5185m	<b>1</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	3

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	7.9	11.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	20.5	24.9


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.2</b>	16.7	21.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	<b>8.2</b>	7.2	7.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

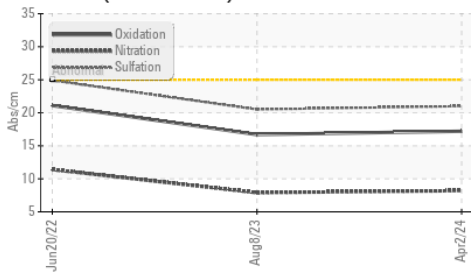

Base Number

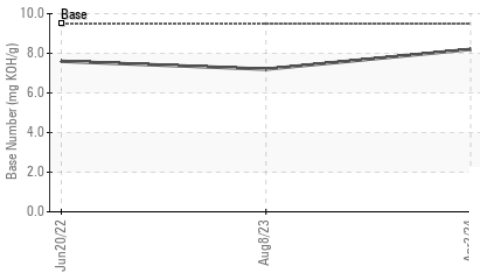

Viscosity @ 100°C

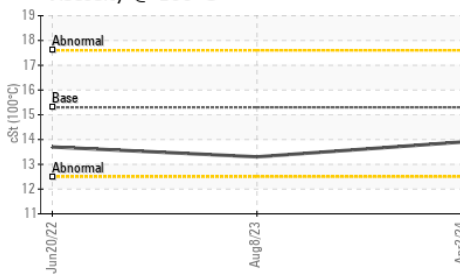


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.3	<b>13.9</b>	13.3	13.7

## GRAPHS


Ferrous Alloys

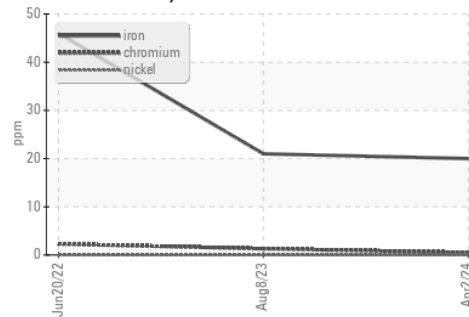


Non-ferrous Metals

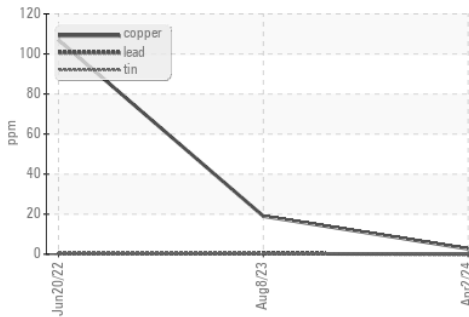

Viscosity @ 100°C

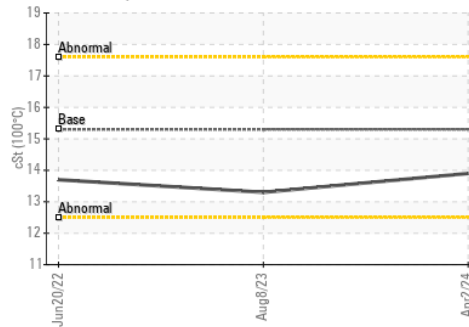

Base Number

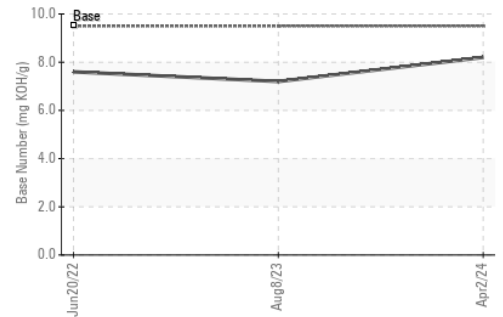

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0923356      **Received** : 15 Apr 2024  
**Lab Number** : **06149312**      **Tested** : 16 Apr 2024  
**Unique Number** : 10979390      **Diagnosed** : 16 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com  
 T: (918)728-5749  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)