




# OIL ANALYSIS REPORT

## Sample Rating Trend

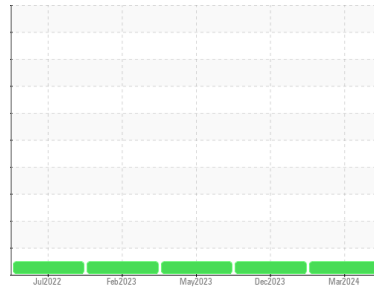

**NORMAL**



Machine Id

**56**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON HP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0850966</b>	WC0867954	WC0740548
Sample Date	Client Info		<b>07 Mar 2024</b>	07 Dec 2023	04 May 2023
Machine Age	mls	Client Info	<b>70140</b>	65039	54462
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>21</b>	10	25
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	5	7
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	3
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>17</b>	10	21
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>70</b>	65	75
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>877</b>	791	381
Calcium	ppm	ASTM D5185m		<b>1331</b>	1211	1788
Phosphorus	ppm	ASTM D5185m		<b>1147</b>	1036	973
Zinc	ppm	ASTM D5185m		<b>1347</b>	1224	1215
Sulfur	ppm	ASTM D5185m		<b>3802</b>	3019	3785

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	6
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	5	19

### INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	7.5	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	19.3	21.4

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.0</b>	15.6	18.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.1</b>	8.1	6.5











# OIL ANALYSIS REPORT

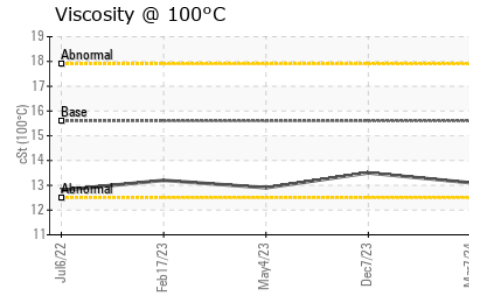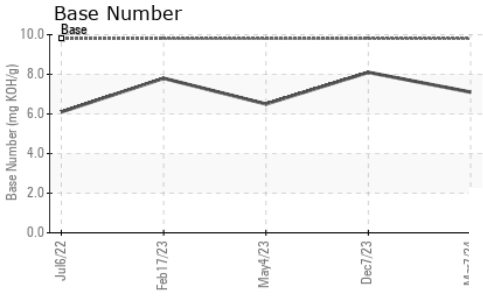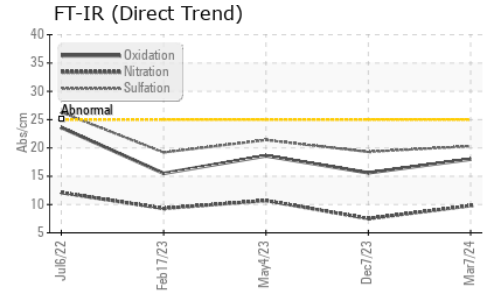

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	13.1	13.5

### GRAPHS

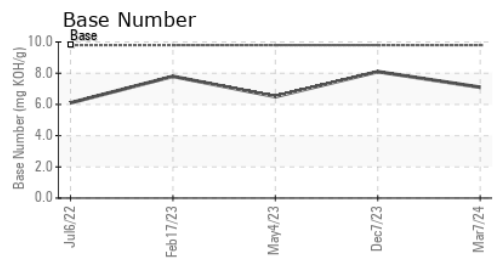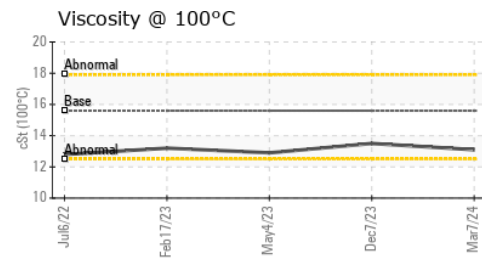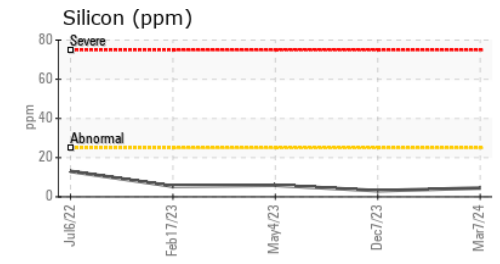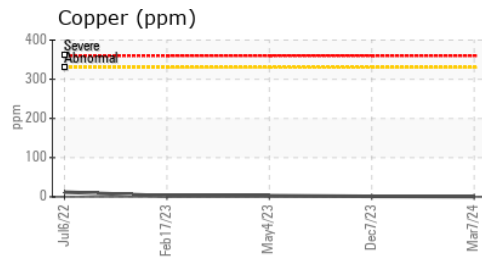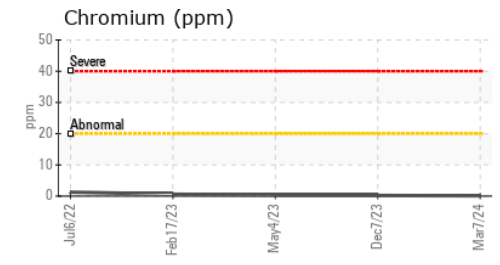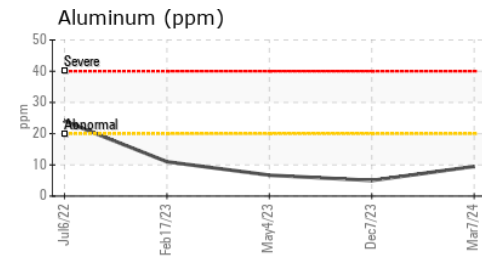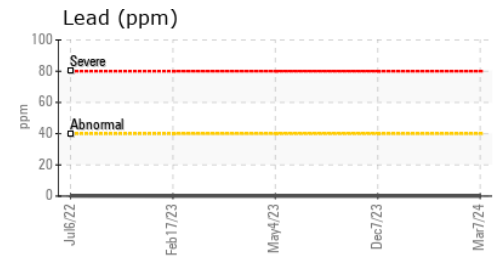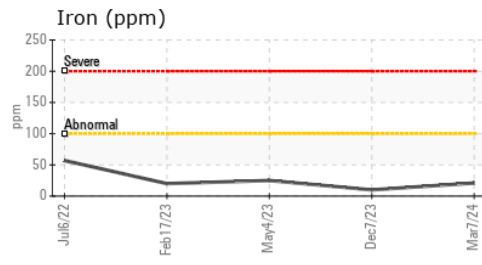

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0850966      **Received** : 15 Apr 2024  
**Lab Number** : 06149340      **Tested** : 16 Apr 2024  
**Unique Number** : 10979418      **Diagnosed** : 16 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ANSON CO SCHOOL BUS GARAGE**  
 89 BOGGAN CUT RD  
 WADESBORO, NC  
 US 28135  
 Contact: MATT POWELL  
 powell.berkeley@anson.k12.nc.us

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)