




# OIL ANALYSIS REPORT

Sample Rating Trend

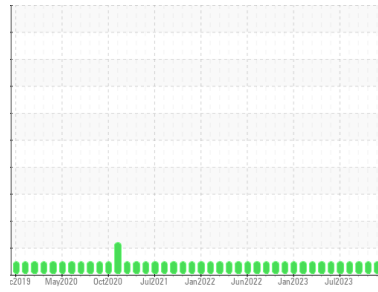

**NORMAL**



Area  
**KANSAS**  
 Machine Id  
**2000 GMC 1000-MD912**  
 Component  
**Diesel Engine**  
 Fluid  
**SHELL Rotella T5 15W-40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0857194</b>	WC0838595	WC0838587
Sample Date	Client Info			<b>05 Jan 2024</b>	05 Oct 2023	12 Sep 2023
Machine Age	mls	Client Info		<b>317277</b>	317218	317146
Oil Age	mls	Client Info		<b>0</b>	0	2010
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>20</b>	35	15
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	9	0
Lead	ppm	ASTM D5185m	>40	<b>0</b>	2	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	8	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>187</b>	168	180
Barium	ppm	ASTM D5185m		<b>0</b>	12	0
Molybdenum	ppm	ASTM D5185m		<b>77</b>	71	71
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>322</b>	280	287
Calcium	ppm	ASTM D5185m		<b>1962</b>	1675	1883
Phosphorus	ppm	ASTM D5185m		<b>1180</b>	1025	1016
Zinc	ppm	ASTM D5185m		<b>1347</b>	1217	1236
Sulfur	ppm	ASTM D5185m		<b>4394</b>	3435	4148

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	6	4
Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.4</b>	5.9	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.0</b>	18.3	18.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.2</b>	14.4	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>7.9</b>	7.6	7.9




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

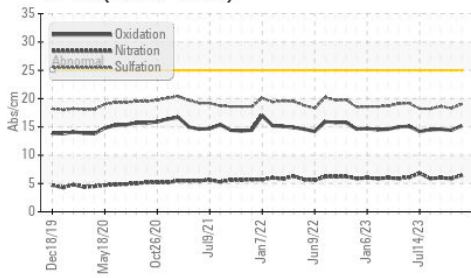

Base Number

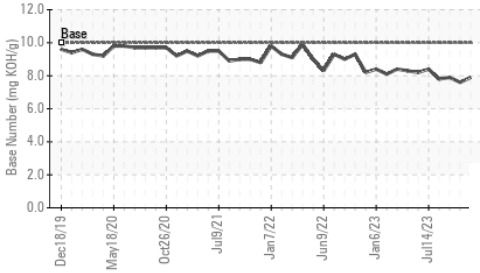

Viscosity @ 100°C

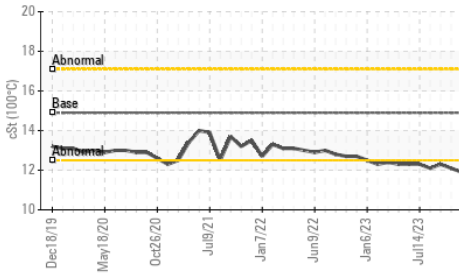


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	11.9	12.1

## GRAPHS


Ferrous Alloys

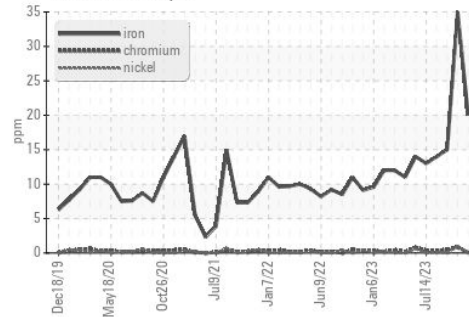


Non-ferrous Metals

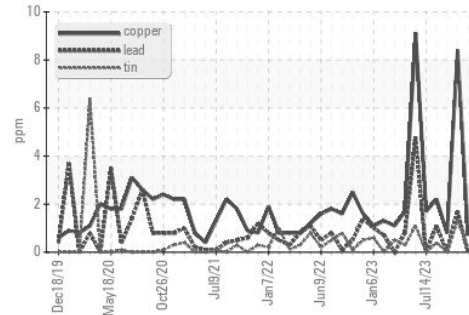

Viscosity @ 100°C

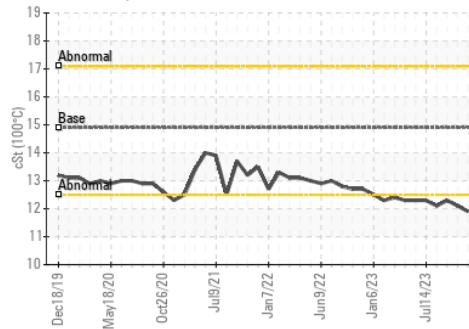

Base Number

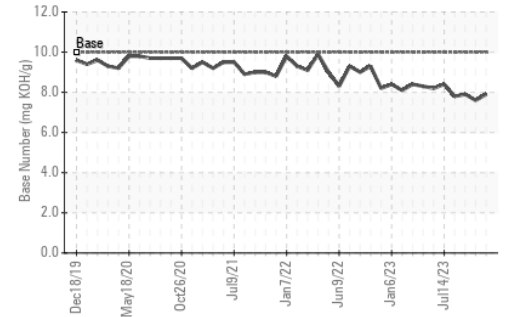

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0857194

Lab Number : 06149355

Unique Number : 10979433

Test Package : FLEET

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 17 Apr 2024 - Don Baldrige

LIBERTY DISPOSAL

6401 S EASTERN AVE

OKLAHOMA CITY, OK

US 73149

Contact: RICK SCHMIDT

r.schmidt@ldi89.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)