

### **OIL ANALYSIS REPORT**

Sample Rating Trend

FUEL

Machine Id

## CAIG100263-3

Diesel Engine Fluid CHEVRON 15W40 (--- QTS)

#### DIAGNOSIS

#### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.


#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0905033		
Sample Date		Client Info		27 Mar 2024		
Machine Age	hrs	Client Info		5220		
Oil Age	hrs	Client Info		1500		
Oil Changed		Client Info		Changed		
Sample Status				MARGINAL		
CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	7		
-	ppm	ASTM D5185m		<1		
	ppm	ASTM D5185m	>4	0		
	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m	>3	0		
•	ppm	ASTM D5185m		5		
	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m		۰ <1		
	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m	210	0		
	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
_	ppm	ASTM D5185m		340		
Barium	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m		131		
Manganese	ppm	ASTM D5185m		<1		
-	ppm	ASTM D5185m		744		
Calcium	ppm	ASTM D5185m		1621		
Phosphorus		ASTM D5185m		789		
Zinc	ppm	ASTM D5185m		943		
	ppm ppm	ASTM D5185m		943 3008		
CONTAMINANTS	ppin	method	limit/base			
				current	history1	history2
	ppm	ASTM D5185m		5		
	ppm	ASTM D5185m	>50	<1		
	ppm	ASTM D5185m	>20	<1		
Fuel	%	ASTM D3524	>5	<b>4</b> .0		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1		
Nitration	Abs/cm	*ASTM D7624	>20	8.4		
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.2		
FLUID DEGRADAT	ΓΙΟΝ	method	limit/base	current	history1	history2
Ovidation	AL / 4		. 05	00.1		
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.1		
	Mbs/.1mm mg KOH/g	ASTM D7414 ASTM D2896	>20	7.6		



# **OIL ANALYSIS REPORT**

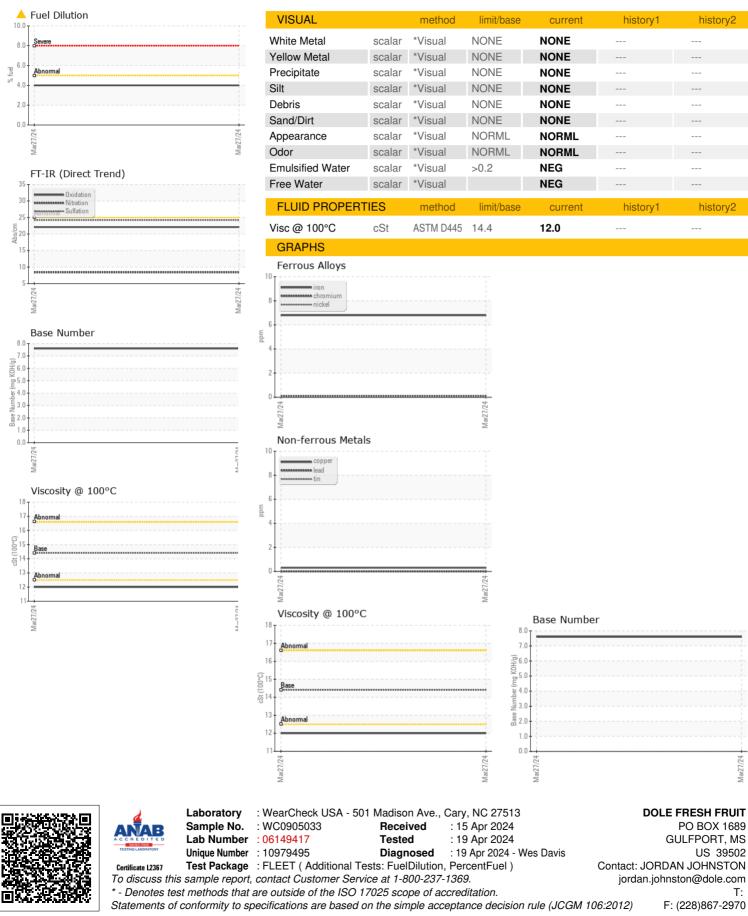

Contact/Location: JORDAN JOHNSTON - DOLGUL

T: