




OIL ANALYSIS REPORT

Sample Rating Trend

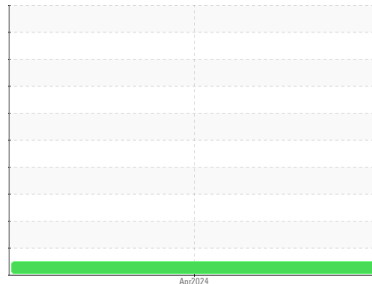

NORMAL



Machine Id

EASG101614-0

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0905049	---	---
Sample Date	Client Info		04 Apr 2024	---	---
Machine Age	hrs	Client Info	3988	---	---
Oil Age	hrs	Client Info	3988	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	3	---
Chromium	ppm	ASTM D5185m	>20	<1	---
Nickel	ppm	ASTM D5185m	>4	0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>3	0	---
Aluminum	ppm	ASTM D5185m	>20	3	---
Lead	ppm	ASTM D5185m	>40	0	---
Copper	ppm	ASTM D5185m	>330	<1	---
Tin	ppm	ASTM D5185m	>15	0	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	365	---
Barium	ppm	ASTM D5185m	10	1	---
Molybdenum	ppm	ASTM D5185m	100	121	---
Manganese	ppm	ASTM D5185m		<1	---
Magnesium	ppm	ASTM D5185m	450	654	---
Calcium	ppm	ASTM D5185m	3000	1497	---
Phosphorus	ppm	ASTM D5185m	1150	716	---
Zinc	ppm	ASTM D5185m	1350	839	---
Sulfur	ppm	ASTM D5185m	4250	2743	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	---
Sodium	ppm	ASTM D5185m	>158	<1	---
Potassium	ppm	ASTM D5185m	>20	0	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	6.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.1	---




OIL ANALYSIS REPORT

FT-IR (Direct Trend)

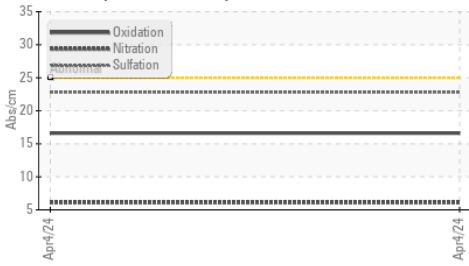

Base Number

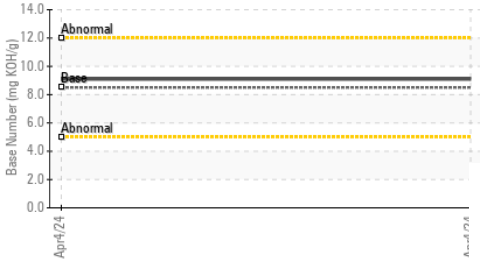

Viscosity @ 100°C




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	---

GRAPHS

Ferrous Alloys

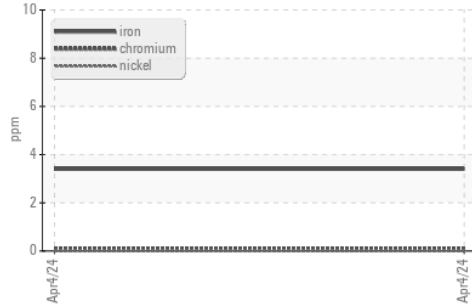


Non-ferrous Metals



Viscosity @ 100°C



Base Number

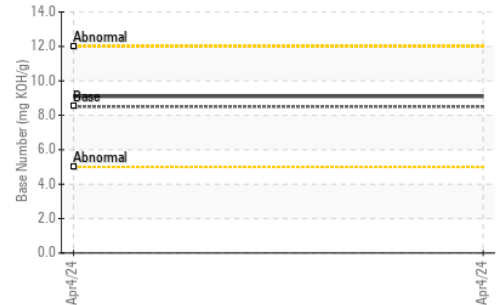

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0905049
Lab Number : 06149434
Unique Number : 10979512
Test Package : FLEET

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 16 Apr 2024 - Wes Davis

DOLE FRESH FRUIT
 PO BOX 1689
 GULFPOR, MS
 US 39502

Contact: JORDAN JOHNSTON
 jordan.johnston@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (228)867-2970