

# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**



Area  
**EMPE**  
 Machine Id  
**P210-21-1057 (S/N 85/516)**  
 Component  
**Hydraulic System**  
 Fluid  
**TULCO LUBSOIL SUPER HYDRAULIC AW 68 (100 GAL)**

**DIAGNOSIS**

**Recommendation**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**

The copper level is abnormal. All other component wear rates are normal.

**Contamination**

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO50002029</b>	---	---
Sample Date	Client Info		<b>10 Apr 2024</b>	---	---
Machine Age	hrs	Client Info	<b>19268</b>	---	---
Oil Age	hrs	Client Info	<b>3697</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >30	<b>1</b>	---	---
Chromium	ppm	ASTM D5185m >2	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >2	<b>0</b>	---	---
Lead	ppm	ASTM D5185m >10	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >25	<b>▲ 79</b>	---	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>55</b>	---	---
Calcium	ppm	ASTM D5185m	<b>44</b>	---	---
Phosphorus	ppm	ASTM D5185m 425	<b>267</b>	---	---
Zinc	ppm	ASTM D5185m 500	<b>300</b>	---	---
Sulfur	ppm	ASTM D5185m 1900	<b>1614</b>	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---	---
Water	%	ASTM D6304 >0.05	<b>0.004</b>	---	---
ppm Water	ppm	ASTM D6304 >500	<b>40</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 56726</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>535</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>10</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>2</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 23/16/10</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.7	<b>0.34</b>	---	---

# OIL ANALYSIS REPORT

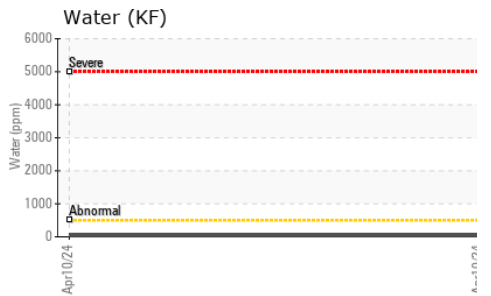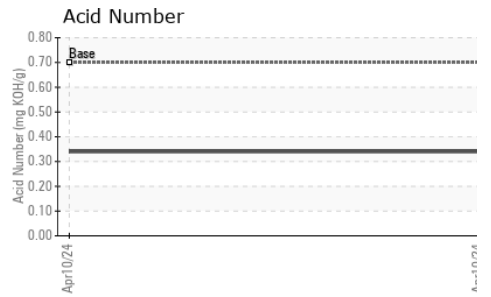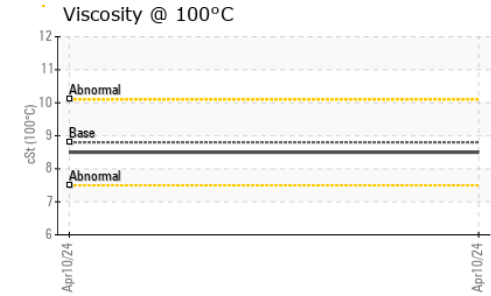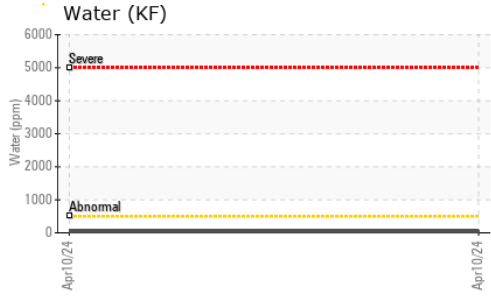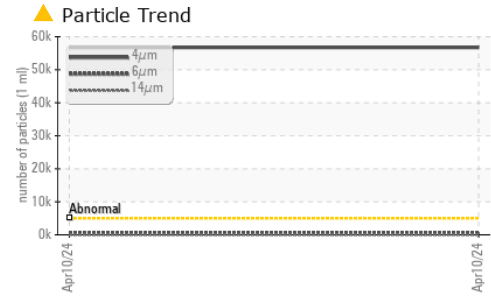






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	67.4	<b>65.4</b>	---	---
Visc @ 100°C	cSt	ASTM D445	8.8	<b>8.5</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270	102	<b>99</b>	---	---

**SAMPLE IMAGES**

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

**GRAPHS**

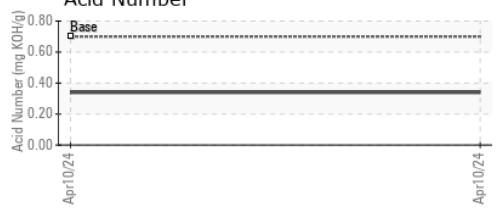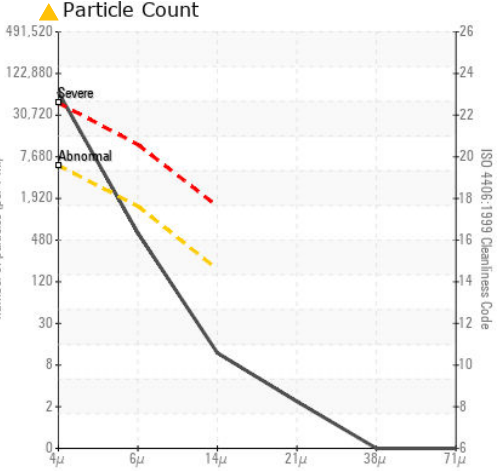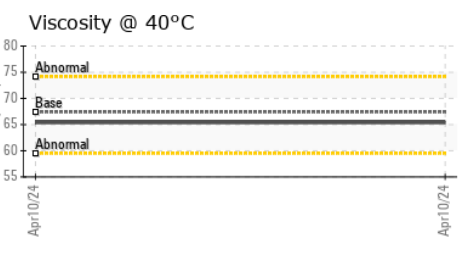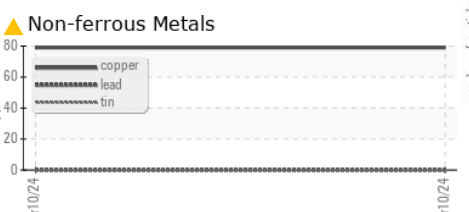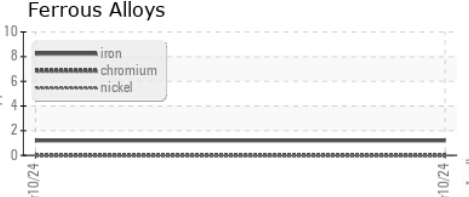

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO50002029      **Received** : 15 Apr 2024  
**Lab Number** : 06149511      **Tested** : 16 Apr 2024  
**Unique Number** : 10979589      **Diagnosed** : 17 Apr 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, VI )

**JAMAK FABRICATION**  
 1401 NORTH BOWIE DRIVE  
 WEATHERFORD, TX  
 US 76086  
 Contact: LARRY NORRIS  
 lano@jamak.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)